

Tru64 UNIX

Sharing Software on a Local Area Network

Part Number: AA-PS3LF-TE

April 1999

Product Version: Tru64 UNIX Version 4.0F or higher

This manual describes the Remote Installation Services (RIS) and the Dataless Management Services (DMS) for Tru64 UNIX (formerly DIGITAL UNIX). RIS is used for installing software kits across a network instead of using locally mounted distribution media. DMS allows client systems to share the `/usr` file system on a server over a network while maintaining their own root (`/`) and `/var` file systems.

© Digital Equipment Corporation 1996, 1997, 1999
All rights reserved.

Compaq Computer Corporation makes no representations that the use of its products in the manner described in this publication will not infringe on existing or future patent rights, nor do the descriptions contained in this publication imply the granting of licenses to make, use, or sell equipment or software in accordance with the description.

Possession, use, or copying of the software described in this publication is authorized only pursuant to a valid written license from Compaq or an authorized sublicensor.

COMPAQ, the Compaq logo, and the Digital logo are registered in the U.S. Patent and Trademark Office. The following are trademarks of Digital Equipment Corporation: ALL-IN-1, Alpha AXP, AlphaGeneration, AlphaServer, AltaVista, ATMworks, AXP, Bookreader, CDA, DDIS, DEC, DEC Ada, DEC Fortran, DEC FUSE, DECnet, DECstation, DECsystem, DECterm, DECUS, DECwindows, DTIF, Massbus, MicroVAX, OpenVMS, POLYCENTER, PrintServer, Q-bus, StorageWorks, Tru64, TruCluster, ULTRIX, ULTRIX Mail Connection, ULTRIX Worksystem Software, UNIBUS, VAX, VAXstation, VMS, and XUI. Other product names mentioned herein may be the trademarks of their respective companies.

NFS is a registered trademark of Sun Microsystems, Inc. UNIX is a registered trademark and The Open Group is a trademark of The Open Group in the US and other countries.

Contents

About This Manual

1 Introduction to Sharing Software

1.1	What is Software Sharing?	1-1
1.2	Benefits of Sharing Software	1-2
1.3	Software Sharing Environment	1-2

2 RIS Servers and Clients

2.1	What is RIS?	2-1
2.2	Starting up RIS	2-2
2.3	RIS Area and Product Environments	2-3
2.4	RIS Client Characteristics	2-4
2.5	Registering Clients	2-5

3 Preparing the RIS Server

3.1	Reviewing RIS Server/Client Version Compatibility	3-1
3.2	Planning Disk Space for RIS	3-3
3.3	Installing the Operating System on the RIS Server	3-4
3.4	Setting Up a Local Area Network	3-5
3.5	Loading and Registering the Server Extensions License	3-5
3.6	Preparing RIS for C2 Security	3-5

4 Setting Up a RIS Area on the Server

4.1	Installing Software into a New RIS Area	4-1
4.2	Installing Software into an Existing RIS Area	4-8
4.3	Including Hardware Product Kits into a RIS Area	4-9
4.4	Using a RIS Area Mounted on NFS	4-13
4.5	Modifying the /etc/exports File	4-14

5 Booting a RIS Client

5.1	Remote Boot Files and Daemons	5-1
5.1.1	Internet Daemon and its Configuration File	5-2
5.1.2	The bootp Daemon (bootpd or joinpd)	5-2

5.1.3	The /etc/bootptab File	5-2
5.1.4	The tftpd Daemon	5-4
5.2	Remote Boot Flow	5-4
6	Managing RIS Clients and Environments	
6.1	Preregistration Tasks	6-1
6.1.1	Obtaining Information About Each Client	6-2
6.1.2	Registering Client Host Names and IP Addresses with Servers	6-2
6.2	Adding a RIS Client with the ris Utility	6-2
6.3	Adding a RIS Client from the Command Line	6-7
6.4	Adding a Client to a RIS Area with a Hardware Product Kit	6-7
6.5	Modifying RIS Clients	6-9
6.6	Removing RIS Clients	6-10
6.7	Listing Registered RIS Clients	6-10
6.8	Listing Products in RIS Server Areas	6-10
6.9	Deleting Products from RIS Server Areas	6-11
6.10	Determining Profile Set Registration for RIS Clients	6-11
6.11	Removing a RIS Client from Profile Set Registration	6-11
6.12	Deleting Profile Sets from the RIS Server	6-11
7	Troubleshooting RIS	
7.1	RIS Lock Files	7-1
7.2	Client Password Expiration	7-2
7.3	Root File System Mounting	7-2
7.4	RIS Client Registration	7-2
7.4.1	No Prompt for Client Hardware Address	7-2
7.4.2	Duplicate Client Hardware Addresses	7-3
7.4.3	Cloned Client Registration	7-4
7.4.4	Client Registered on Multiple RIS Servers	7-4
7.4.5	Client Not in RIS Database	7-4
7.5	RIS Server Response	7-5
7.5.1	Servers Using the bootp Daemon	7-6
7.5.2	Servers Using the joinid Daemon	7-8
7.5.3	Loading an Incorrect Kernel File	7-9
8	Using RIS for Installation Cloning	
8.1	Benefits of Installation Cloning	8-1
8.2	Using CDFs and User-Supplied Files	8-1
8.2.1	CDFs	8-2

8.2.2	User-Supplied Files	8-2
8.3	RIS Administrator Tasks	8-3
8.4	Copying Files to the RIS Server	8-5
8.5	Profile Sets	8-6
9	Dataless Management Services	
9.1	What is the Dataless Management Services Environment? ...	9-1
9.2	Benefits of Dataless Management Services	9-1
9.3	Relationship Between DMS Servers and Clients	9-2
9.3.1	DMS Server	9-2
9.3.2	Environment Portion of DMS Area	9-3
9.3.3	Client Portion of DMS Area	9-5
9.3.4	Characteristics of DMS Clients	9-5
10	Preparing DMS Servers and Clients	
10.1	Requirements for DMS Servers	10-1
10.2	Requirements for DMS Clients	10-2
10.3	Allocating Disk Partitions on the DMS Server	10-3
10.4	Setting Up a Local Area Network (LAN)	10-3
10.5	Setting Up a Network File System	10-3
10.6	Planning Disk Space for DMS	10-4
10.6.1	Disk Space Required for DMS Environments	10-4
10.6.2	Estimating Disk Space for Clients	10-6
10.6.3	Types of Kernel Builds	10-6
10.7	Installing the Operating System on the DMS Server	10-7
10.8	DMS Client Registration	10-8
10.8.1	Obtaining Information About Each DMS Client	10-8
10.8.2	Registering Clients' Host Names and IP Addresses with DMS Servers	10-9
10.9	Security Considerations	10-9
11	Creating DMS Environments on the DMS Server	
11.1	Compatibility Between the DMS Server and the DMS Client	11-1
11.2	Installing Software in a New DMS Environment	11-2
11.3	Adding Software to an Existing DMS Environment	11-10
11.4	Installing a Hardware Update Release into a DMS Environment	11-12
11.5	Configuring DMS Environments	11-13
11.5.1	Customizing .proto.. Files	11-13
11.5.2	Configuring the DMS Environment	11-14

11.6	Setting Up a Worldwide DMS Server	11-17
11.6.1	DMS Server Setup	11-17
11.6.2	Worldwide Client Setup	11-19
11.6.3	Building an Asian Kernel for DMS Clients	11-19
12	Managing DMS Clients and Environments	
12.1	DMS Client Database File	12-1
12.2	Adding a DMS Client	12-2
12.3	Booting a DMS Client	12-7
12.4	Deleting a Software Environment	12-8
12.5	Modifying Client Information	12-10
12.6	Removing a Client	12-11
12.7	Listing DMS Clients	12-13
12.8	Showing Software Environments	12-13
12.9	Maintaining the DMS Environment	12-14
12.9.1	Controlling Root File System Growth	12-14
12.9.2	Listing Installed Software Subsets	12-15
12.9.3	Removing Subsets	12-15
13	DMS Troubleshooting	
13.1	Server Areas to Check for Client Booting Problems	13-1
A	RIS Worksheet	
B	DMS Worksheets	
C	Using the utilupdate Utility	
	Glossary	
	Index	
	Examples	
5-1	Sample /etc/bootptab File	5-2

7-1	Sample daemon.log File	7-7
-----	------------------------------	-----

Figures

2-1	RIS Server and Client	2-1
2-2	Sample RIS Area Overview	2-3
3-1	System Compatibility	3-3
8-1	Summary of Administrator Tasks	8-4
9-1	File Sharing Between the DMS Server and Client	9-3
9-2	Environment Portion of DMS Area	9-4
9-3	DMS Client Area	9-5
9-4	Client Views of the DMS Area	9-6

Tables

5-1	Remote Boot Files and Daemons	5-1
10-1	Estimated Version 4.0F Subset Sizes for DMS	10-5
11-1	List of .proto. Files in /etc	11-13

About This Manual

This manual describes the Remote Installation Services (RIS) and Dataless Management Services (DMS) environments and utilities maintained on a Compaq Tru64™ UNIX® (formerly DIGITAL UNIX) operating system.

- RIS is used for installing software kits across a network from a centrally administered server instead of using locally mounted media.
- DMS lets client systems share the `/usr` and `/var` file systems on a centrally administered server over a network while still maintaining their own root (`/`) file system.

Audience

This book is intended for anyone using the Remote Installation Services (RIS) or the Dataless Management Services (DMS), especially those system administrators responsible for maintaining RIS and DMS environments on your LAN. The following assumptions are made:

- Your hardware is working properly.
- You have read the owner's manuals supplied with your hardware.
- You know the location and function of the controls and indicators on your hardware.
- You understand how to load and unload the installation media and any disks needed during the installation.
- You know how to use the operating system software.

New and Changed Features

This manual has been revised for the current release. The following list describes the major changes made to this book:

- Chapter 8 has been rewritten with new information about setting up cloned installations with RIS.
- The `bootpd` bootstrap daemon has been moved to the Obsolete Commands and Utilities (Obsolete Components) subset (OSFOBSOLETE440). References to `bootpd` have been updated to reflect this change.

- References to the *Installation Guide* in this document have been updated.
- Appendix C has been added to provide information on using the `utilupdate` utility.
- Glossary definitions are provided for the configuration description file (CDF) and the Trivial File Transfer Protocol (TFTP).

Organization

This manual is organized as follows:

Chapter 1	Introduces the concept of servers and clients. This chapter explains what a server is, what a client is, and how they work together. It also describes the basic architecture of the server/client environment.
Chapter 2	Describes the relationship between the RIS server and clients.
Chapter 3	Lists the formats in which distribution media are available and describes the preliminary setup procedures for RIS.
Chapter 4	Describes the procedure for setting up a RIS server, including installing and updating software.
Chapter 5	Describes networking-related files and daemons used by the <code>ris</code> utility and the process a client goes through when it boots over the network.
Chapter 6	Describes processes and procedures for maintaining and managing a RIS system, including adding, deleting, and modifying clients and clients' setups.
Chapter 7	Provides information on troubleshooting problems with RIS clients.
Chapter 8	Describes the installation cloning process and explains how to use RIS to set up and manage cloned installations.
Chapter 9	Provides the introduction to Dataless Management Services and the dataless management utility (<code>dmu</code>).
Chapter 10	Describes how to prepare a server system for DMS.
Chapter 11	Describes the steps necessary to configure a DMS server including how to install software into a DMS environment.
Chapter 12	Describes how to use the dataless management utility (<code>dmu</code>) to add, modify, remove, and list DMS clients. It also describes how to show and delete a DMS environment, and how to apply a binary patch to the kernel.

Chapter 13	Provides information on troubleshooting problems with DMS clients.
Appendix A	Contains a worksheet to use in the RIS installation process.
Appendix B	Contains worksheets to calculate space requirements on DMS servers and clients. Also included is a client setup worksheet.
Appendix C	Describes the <code>utilupdate</code> utility.

Related Documents

You should have the following documentation available:

- The hardware documentation for your system
- *Release Notes*
- *Reference Pages Sections 8 and 1m*
- *System Administration*
- *Installation Guide*

The printed version of the Tru64 UNIX documentation set is color coded to help specific audiences quickly find the books that meet their needs. (You can order the printed documentation from Compaq.) This color coding is reinforced with the use of an icon on the spines of books. The following list describes this convention:

Audience	Icon	Color Code
General users	G	Blue
System and network administrators	S	Red
Programmers	P	Purple
Device driver writers	D	Orange
Reference page users	R	Green

Some books in the documentation set help meet the needs of several audiences. For example, the information in some system books is also used by programmers. Keep this in mind when searching for information on specific topics.

The *Documentation Overview* provides information on all of the books in the Tru64 UNIX documentation set.

Reader's Comments

Compaq welcomes any comments and suggestions you have on this and other Tru64 UNIX manuals.

You can send your comments in the following ways:

- Fax: 603-884-0120 Attn: UBPG Publications, ZKO3-3/Y32
- Internet electronic mail: `readers_comment@zk3.dec.com`

A Reader's Comment form is located on your system in the following location:

```
/usr/doc/readers_comment.txt
```

- Mail:

Compaq Computer Corporation
UBPG Publications Manager
ZKO3-3/Y32
110 Spit Brook Road
Nashua, NH 03062-9987

A Reader's Comment form is located in the back of each printed manual. The form is postage paid if you mail it in the United States.

Please include the following information along with your comments:

- The full title of the book and the order number. (The order number is printed on the title page of this book and on its back cover.)
- The section numbers and page numbers of the information on which you are commenting.
- The version of Tru64 UNIX that you are using.
- If known, the type of processor that is running the Tru64 UNIX software.

The Tru64 UNIX Publications group cannot respond to system problems or technical support inquiries. Please address technical questions to your local system vendor or to the appropriate Compaq technical support office. Information provided with the software media explains how to send problem reports to Compaq.

Conventions

The following conventions are used in this manual:

%
\$

A percent sign represents the C shell system prompt. A dollar sign represents the system prompt for the Bourne, Korn, and POSIX shells.

#	A number sign represents the superuser prompt.
% cat	Boldface type in interactive examples indicates typed user input.
<i>file</i>	Italic (slanted) type indicates variable values, placeholders, and function argument names.
[] { }	In syntax definitions, brackets indicate items that are optional and braces indicate items that are required. Vertical bars separating items inside brackets or braces indicate that you choose one item from among those listed.
cat(1)	A cross-reference to a reference page includes the appropriate section number in parentheses. For example, <code>cat(1)</code> indicates that you can find information on the <code>cat</code> command in Section 1 of the reference pages.
Return	In an example, a key name enclosed in a box indicates that you press that key.
Ctrl/x	This symbol indicates that you hold down the first named key while pressing the key or mouse button that follows the slash. In examples, this key combination is enclosed in a box (for example, Ctrl/C).

Introduction to Sharing Software

This chapter describes the concept of software sharing and the components that make up a software sharing environment.

1.1 What is Software Sharing?

A **server** is a computer system that provides another computer system with required or useful information or resources. The system that uses the information or resources from the server is called a **client**. A given server can serve one or many clients. Computers in a network can share disk space, lists of names, software kits, processing services, and other entities.

For sharing software using Remote Installation Services (RIS) and Dataless Management Services (DMS), the server supplies software, software kits, and disk space for clients to use.

The DMS and RIS services let you share software in the following ways:

- RIS sets up a system where one or more installable software kits are stored for installation across a local area network (LAN). With RIS, you can buy only one copy of a given software kit. One computer, the **RIS server**, stores the kit in a special area (called the **RIS area**) on its disk. Other computers, called **RIS clients**, can install the software onto their own disks by accessing it across the network instead of from locally mounted distribution media (such as CD-ROM).
- DMS sets up a system in which you can save disk space by sharing the actual operating system software between computers. Without DMS, each computer has a copy of its operating system software on its own disk. With DMS, one computer, acting as a **DMS server**, stores the software in a special area (called the **DMS area**) on its disk. Other computers, called **DMS clients**, run by accessing the software across the local area network (LAN) instead of from their local disks.

The DMS and RIS utilities share architectural similarities; the primary differences are in the contents of their respective server disk areas.

1.2 Benefits of Sharing Software

You can reduce your software and hardware costs by sharing software between computers.

- When you share software with RIS, you have a central location for all the software to install on your system. You do not have to take the software media to the client site, and can install the same software simultaneously on several clients.
- When you share software with DMS, several of the computers in your local area network (LAN) use a single copy of a given piece of software. This reduces the need for multiple copies of the same software, reduces the disk space required for software storage, and allows central administration of software resources.

You are not limited to sharing one piece of software; you can share virtually all of your operating system software.

1.3 Software Sharing Environment

The following components make up the environment for software sharing:

- A server

The server's system administrator prepares the server for RIS or DMS by installing the operating system and ensuring that the server is connected to a LAN. A single server can serve both DMS and RIS clients, however a client cannot be registered to both DMS and RIS.

- A distribution device on the server

For most servers, the distribution device is a CD-ROM optical disk driver or a software distribution copied directly to magnetic disk. You transfer or link the software subsets for one or more specific products and architectures from the distribution media to the RIS or DMS areas on the server. Registered clients can then access the software.

- A local area network (LAN)

You must set up the server and all client processors as hosts on the LAN (using Ethernet, FDDI, or Token Ring for RIS and Ethernet or FDDI for DMS). Clients use the LAN to access the server's DMS and RIS areas.

- Clients

RIS clients are systems that can run the operating system for which the server provides kits; only these processors can install the base operating system from a server. Layered products can be installed after the client's operating system is running if the processor supports the `setld` utility.

DMS clients must be capable of booting over Ethernet or FDDI using the `bootp` and `tftp` protocols. Most Alpha workstations and deskside servers have this capability, but some data center servers cannot be configured as DMS clients. Consult your system's user guide and related documentation to determine whether it supports `bootp` and `tftp` over Ethernet or FDDI.

Note

You cannot use RIS or DMS to install software on DEC 2000 series or DEC 7000 series workstations.

RIS Servers and Clients


This chapter describes Remote Installation Services (RIS), the `ris` utility, and the relationship between the RIS servers and clients.

2.1 What is RIS?

Remote Installation Services (RIS) uses the `ris` utility to set up a central computer system (a server) to service multiple computer systems (clients) on a local area network (a LAN) with required software.

With RIS, the server has a disk area set aside as the RIS area. The RIS area contains copies of software kits that are available for installation on to registered clients. Figure 2–1 shows how the RIS system works.

Figure 2–1: RIS Server and Client

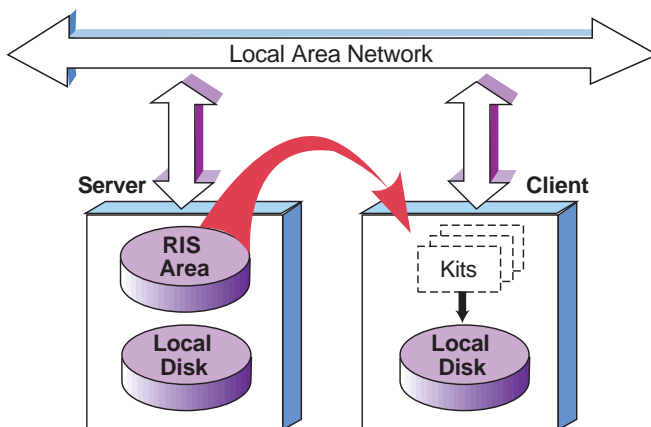

ZK-0268U-AI

In the RIS area, the server maintains information about what software kits the clients can access. Kits are organized so that a software product can supply several different versions to allow for the differences between multiple hardware platforms and operating systems. The server's RIS area is made available for read-only access to clients by means of the Network File System (NFS®).

The server is a passive partner in the day-to-day operation of a RIS system. Beyond verifying clients' identities and their kit load requests, and managing accepted requests, the server does not interact directly with the clients. A system does not have to be a dedicated RIS server; it also can support local timesharing users.

A RIS client installs software kits on to the server by using the `ris` utility; the utility copies the kit contents across the network from the server instead of from local media.

Some of the features and benefits of DMS and RIS follow:

- Installation and setup of servers and clients are done by scripts, thereby simplifying the server system administrator's task. Maintenance of the server's disk areas is similarly straightforward. The system interface is the same regardless of system type.
- Because the DMS and RIS software supports different hardware platforms and different software versions, it is adaptable to a wide variety of client systems and requirements. Servers running a given version of an operating system can serve clients running the same version or an earlier version of the operating system. In addition, if the `ris` utility on the server is updated to the current version using the `utilupdate` utility, servers running an earlier version of the system can support the current version.
- RIS uses a single set of kit files for all clients having the same architecture.
- The ability to register a RIS client using a cloned installation has been added. A cloned installation lets you duplicate a system configuration from a similar type system.

2.2 Starting up RIS

You always should run the `ris` utility as superuser. To start the `ris` utility, enter the following command:

```
# /usr/sbin/ris
```

When RIS starts up, it checks the status of the RIS areas.

If RIS can access all the products it was able to access the last time RIS was started, it displays the following message:

```
Checking accessibility of RIS areas... done
```

If RIS cannot access all the products, it was able to access previously, it displays the following message:

```
No Products Available in /var/adm/ris/ris0.alpha
```

```
Delete RIS environment? [y]:
```

This may have occurred because the source for this RIS environment is no longer mounted. This can be corrected by remounting the source. If the source is no longer available, you may choose to delete this RIS environment. If you remount the source, you must restart RIS so that the environment is available.

If you try to start RIS and you are not superuser, the following message may be displayed:


```
Checking accessibility of RIS areas...  
No permission to write /usr/var/adm/ris/ris0.alpha/ProdNames  
done
```

You can correct this problem by starting RIS as superuser. You always should run the `ris` utility as superuser.

2.3 RIS Area and Product Environments

In addition to the server's normal disk area, a partition or area is reserved on the server to hold RIS software kits. This **RIS area** contains one or more **product environments**. Each product environment contains one or more software kits suitable for installation on a given hardware or software platform. Figure 2-2 shows a generalized illustration of a sample RIS area.

Figure 2-2: Sample RIS Area Overview

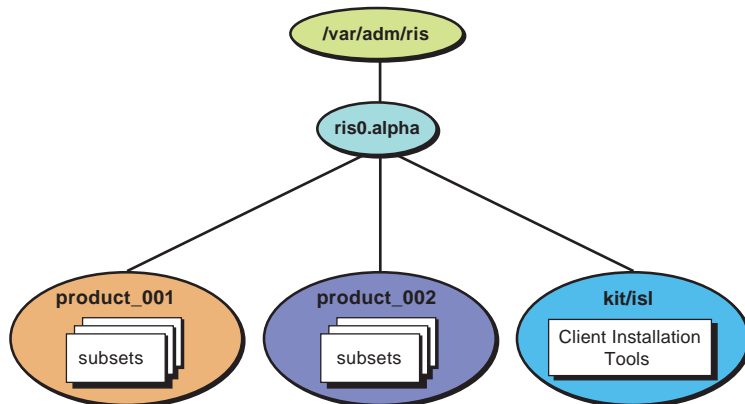

ZK-0620U-AI

In Figure 2-2, the RIS area `/var/adm/ris` contains one product environment, `ris0.alpha`. Each product environment contains products for a specific platform. In Figure 2-2, the target platform is machines using Alpha processors. Multiple product environments can exist in a single RIS area. Each product environment contains one or more product directories, each product directory contains several product kit archives, called software **subsets**. Figure 2-2 shows a product environment named `ris0.alpha` containing directories called `product_001`, `product_002`, and `product_003`.

Figure 2-2 also shows the `kit/isl` directory. The `kit/isl` directory contains installation tools required by clients when they install software over the network. If your environment is in Direct CD-ROM (DCD) format the `kit/isl` directory does not exist. An environment in DCD format is the same as a system disk format it includes `/`, `/usr`, and so on.

The server itself usually does not use any of the RIS area. System administrators can access the product area as required for maintenance and for installation or removal of product kits.

For more flexibility, you can establish multiple RIS areas in separate partitions. RIS areas on a given server can be exported to other servers using the Network File System (NFS). Servers that import such RIS areas can use them as if they were local, supplying the imported subsets to their own set of clients. Section 4.4 describes how to use NFS to mount a RIS area. The *Network Administration* guide describes how to export and import file systems.

2.4 RIS Client Characteristics

A RIS installation uses the LAN as its installation media instead of a distribution CD-ROM. A RIS client can install any software kit for which it is registered on the server. The installation procedure runs entirely on the client and, after the necessary software is installed, no continuing relationship is required between the RIS server and client.

The operating system itself can be among the kits that are available from the server. To install the operating system, the client processor is booted across the network using a minimal generic kernel that is part of the software kit. The RIS area is NFS mounted and becomes the client's root file system during the installation.

Once booted, the appropriate installation interface, either character-cell or graphical user interface (GUI), is launched. After all installation responses are entered, the installation software configures the file system and then uses the `setld` utility to load the selected software. For more information about the `setld` utility, see the `setld(8)` reference page.

After the installation is complete, the system is rebooted using the newly installed software. For additional information on installation procedures, see the *Installation Guide*.

2.5 Registering Clients

A client must be registered with only one server for the base operating system. If you register a client with more than one server for the base operating system, each server the client is registered on will attempt to respond to the client's network boot request with unpredictable results.

To change the server with which a client is registered for the base operating system, first remove the client from the current server's client database and then register it with the new server. See Chapter 6 for information about registering and removing RIS clients.

A client can be registered with multiple servers for optional subsets and products other than the base operating system. When you load optional subsets or layered products with the `setld` utility, you specify the name of the server from whom to copy the kits.

3

Preparing the RIS Server

This chapter provides the information you need to prepare a RIS server. Topics include:

- Reviewing RIS server/client version compatibility
- Planning disk space for RIS
- Installing the operating system on the RIS server
- Setting up a local area network
- Loading and registering the server extensions license
- Preparing RIS for running on a server with C2 security enabled

3.1 Reviewing RIS Server/Client Version Compatibility

This section only applies if you are installing a new version of the operating system into a RIS environment on a server that is running a previous version of the operating system. If not, go to section Section 3.2.

Note

If you plan to serve third-party software products from this RIS area, where a new driver is needed to boot the client, the RIS server must be running Tru64 UNIX Version 4.0F. If this is the case, go to section Section 3.2.

To install the operating system into a RIS environment on a RIS server running a previous version of the operating system, you must do the following on the server as superuser:

1. If your distribution media is CD-ROM, enter a `mount` command similar to the following:

```
# mount -rd /dev/rz4c /mnt
```

This example uses a CD-ROM drive that is unit 4 and specifies `/mnt` as the mount point; if your drive is a different unit, substitute the device special file name for that unit.

If you are uncertain of your CD-ROM's unit number, use the `file` command as follows:

```
# file /dev/rrz*c
/dev/rrz1c: char special (8/1026)  SCSI #0 RZ25  disk#  8 (SCSI ID # 1)
/dev/rrz2c: char special (8/2050)  SCSI #0 RZ25  disk# 16 (SCSI ID # 2)
/dev/rrz3c: char special (8/3074)  SCSI #0 RZ25  disk# 24 (SCSI ID # 3)
/dev/rrz4c: char special (8/4098)  SCSI #0 RRD43 disk# 32 (SCSI ID # 4)
```

The CD-ROM device corresponds to the RRD device, in this example RRD43.

2. To update the necessary RIS utilities on the server, assuming the distribution media is mounted at `/mnt`, enter the following:

```
# /mnt/isl/utilupdate -r -m /mnt
```

- In this example, the `-r` flag causes `utilupdate` to copy several files from the distribution CD to the server's `/usr/sbin` directory. This ensures RIS compatibility with the operating system.
- The `-m directory` is the mount point of the distribution media. In this example, *directory* is `/mnt`, and is a required parameter.

This command copies any files in `/usr/sbin` that would be overwritten to files with a `*.pre-V4.0F` suffix. For example: `/usr/sbin/setld` is copied to `/usr/sbin/setld.pre-V4.0F`.

When the `utilupdate` script completes, this RIS server can serve a RIS client. Appendix C describes the `utilupdate` utility.


When you are installing the operating system, if the utility finds existing `*.pre-V` files on your system, the existing utilities are updated with no changes to the saved `*.pre-V` files. If the server is already running the new or updated version of the operating system, a confirmation message is displayed and no copies are made.

Please note the following system compatibility restrictions:

- Support of differing bootstrap protocols restricts the use of the Tru64 UNIX and ULTRIX operating systems together in RIS environments.
- Alpha-based clients can broadcast `bootp` requests. VAX-based or MIPS-based clients broadcast only Maintenance Operation Protocol (MOP) requests, which means they cannot boot from the servers.
- After a client's operating system is installed and running, a server can serve additional product subsets to a client running either an ULTRIX or a compatible operating system. The client loads the additional subsets by using the `setld` utility.

Figure 3-1 shows these relationships:

Figure 3–1: System Compatibility

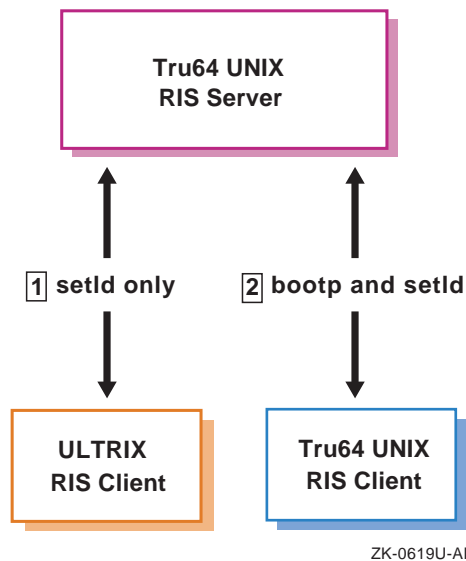

- ❶ ULTRIX RIS clients cannot be booted by Tru64 UNIX RIS servers. This means that a Tru64 UNIX server cannot serve the ULTRIX base operating system over the network. However, after the ULTRIX operating system is up and running on the client, the Tru64 UNIX server can serve an ULTRIX client additional product subsets. The ULTRIX client loads additional product subsets by using the `setld` utility.
- ❷ A RIS client can be booted by a RIS server by using the `bootp` protocol. This means that a server can serve both the base operating system as well as additional product subsets to the client over the network. The client loads additional product subsets by using the `setld` utility.

3.2 Planning Disk Space for RIS

Before beginning an installation, you must calculate the amount of disk storage required for the software subsets in the RIS areas on the server. If space on the server's system disk is an issue and your server's distribution media is a CD-ROM, you might want to create symbolic links from the RIS server area to the software on the CD-ROM. Section 4.1 briefly describes the advantages and disadvantages of establishing symbolic links instead of extracting the software subsets into the RIS server area.

See Chapter 1 for a description of the RIS area's contents. A given server can have multiple RIS areas, in which some of the subsets can be

duplicated. To organize your RIS server's disk space, perform the following steps:

1. Determine how many RIS environments you want.
2. Choose the software subsets you want to install, organizing them by the environments where they are to be installed.
3. Use the subset size information in the *Installation Guide* to ensure that you have adequate disk space.

3.3 Installing the Operating System on the RIS Server

The *Installation Guide* describes how to install the operating system on the server. It lists all of the standard supported software subsets with subset names, sizes, and descriptions of their contents. This information will help you organize the process before you perform the installation.

Because RIS areas are created in `/var/adm/ris`, you may want to specify a separate `/var` file system during the installation to get extra disk space. To specify a separate file system for `/var`, refer to the instructions in the *Installation Guide*.

A RIS server must have the Remote Installation Service and Additional Networking Services subsets installed. These subsets contain the `tftp` networking utility and the `joind` bootstrap daemon.

Enter the following command to see if these subsets are installed:

```
# /usr/sbin/setld -i | egrep "RIS|INET"
```

Information similar to the following should be displayed:

OSFCLINET440	installed	Basic Networking Services
OSFINET440	installed	Additional Networking Services
OSFRIS440	installed	Remote Installation Service

The Basic Networking Services subset is mandatory and is installed automatically. If the Additional Networking Services and Remote Installation Service subsets are not installed, you must install them by using the `setld` utility.

See the *Installation Guide* for more information about using the `setld` utility to install subsets.

3.4 Setting Up a Local Area Network

You must connect the RIS server and all of the client processors to a LAN using either Ethernet, FDDI, or Token Ring. The server and clients all must be on the same network or subnetwork unless the router connecting the networks or subnetworks can forward `bootp` requests.

For instructions on setting up a local area network, refer to the *Network Administration* guide.

3.5 Loading and Registering the Server Extensions License

The Tru64 UNIX Server Extensions license (OSF-SVR or UNIX-SERVER) provides the right to use the RIS software on Tru64 UNIX systems. A product authorization key (PAK) accompanies the license. You must register the PAK information for your system before it can be configured as a RIS server. Register the PAK information by using the License Manager application. Refer to `dxlicense(8)` for additional information. See the *Software License Management* guide and the License Manager online help for more information about registering license PAKs.

After you have registered the PAK information, you can complete the server setup tasks described in Chapter 4.

3.6 Preparing RIS for C2 Security

If your RIS server will have C2 security enabled, the `ris` user file must be changed to ensure that the `ris` password does not expire and deny client access.

Perform the following steps on the RIS server as superuser to modify the `ris` user file if you are going to use RIS with C2 security enabled:

1. Edit the file `/tcb/files/auth/r/ris`. Each field is delimited by a colon (:).
2. Set the current password field `u_pwd` to an asterisk (*).
3. Set the `u_succhg` value to any non-zero value. This value is a `time_t` type printed with `%ld`.
4. Set the `u_life` and `u_exp` fields to zero.

The following is an example of a modified `/tcb/files/auth/r/ris` user file:

```
ris:u_name=ris:u_id#11:u_oldcrypt#0:u_pwd=*:u_exp#0:u_life#0:  
u_suchg#79598399:u_suclog#79598399:u_lock@:chkent:
```

After you make these changes, the RIS password should not expire and cause a denial of service to clients.

4

Setting Up a RIS Area on the Server

This chapter describes how to use the `ris` utility to configure a RIS server. After completing this chapter, you will be able to:

- Establish a new RIS server area using the `ris` utility
- Install software kits in existing RIS area
- Install hardware product kits in existing RIS area
- Modify the `/etc/exports` file, if necessary, to export RIS areas

The `ris` utility can be invoked in two ways:

- Interactively through a menu-driven interface
- From the command line by issuing commands to perform the various tasks one at a time

This chapter describes how to use the utility's menu-driven interface. Chapter 6 describes how to use individual `ris` commands. For additional information on the `ris` utility, see the `ris(8)` reference page.

4.1 Installing Software into a New RIS Area

After you create a RIS area and install the first software kit there, you can install more kits into that area or create other areas as you need them. (Section 4.2 describes how to install additional software into an existing RIS environment.)

Use the following procedure to create a new `risN.alpha` environment and install the first software kit into it:

1. Enter a `mount` command similar to the following before starting the utility if your distribution media is a CD-ROM:

```
# mount -rd /dev/rz4c /mnt
```

This example uses `rz4c` and specifies `/mnt` as the mount point; if your drive or mount point is different, make the appropriate substitutions.

If you are uncertain of your CD-ROM's unit number, use the `file` command as follows:

```
# file /dev/rrz*c
/dev/rrz1c: char special (8/1026)  SCSI #0 RZ25  disk#  8 (SCSI ID # 1)
/dev/rrz2c: char special (8/2050)  SCSI #0 RZ25  disk# 16 (SCSI ID # 2)
/dev/rrz3c: char special (8/3074)  SCSI #0 RZ25  disk# 24 (SCSI ID # 3)
/dev/rrz4c: char special (8/4098)  SCSI #0 RRD43 disk# 32 (SCSI ID # 4)
```

The CD-ROM device corresponds to the RRD device, in this example RRD43.

2. Enter the following command to invoke the `ris` utility from the root system prompt:

```
# /usr/sbin/ris
```

The RIS Utility Main Menu is displayed. Each available menu item is preceded by a letter. The first time you invoke the utility, the display looks similar to the following:

```
Checking accessibility of RIS areas.... done

*** RIS Utility Main Menu ***

Choices without key letters are not available.

  ) ADD a client
  ) DELETE software products
i) INSTALL software products
  ) LIST registered clients
  ) MODIFY a client
  ) REMOVE a client
  ) SHOW software products in remote installation environments
x) EXIT
```

Enter your choice:

The RIS Utility Main Menu does not display option letters for menu items that cannot be accessed. As you add environments, software, and clients to the system, other menu options will become available on the menu.

3. Choose the `Install software products` option by entering `i` at the prompt:

```
Enter your choice:  i
```

The RIS Installation menu displays the installation options. Choose option 1, the `Install software into a new area` option.

```
RIS Software Installation Menu:

  1) Install software into a new area
  2) Add software into an existing area
  3) Return to previous menu
```

```
Enter your choice:  1
```


You have chosen to establish a new remote installation environment.

4. **Enter the full pathname or the device special file name for the distribution media. If your distribution media is CD-ROM mounted on /mnt, the directory where the software is located is /mnt/ALPHA/BASE. Enter a device specific file name only for magnetic tape media.**

Enter the device special file name or the path of the directory where the software is located
(for example, /mnt/ALPHA/BASE): **/mnt/ALPHA/BASE**

5. **The utility requests whether you want to use the standard boot method or the boot-link method. Select the boot-link method if you intend to add software, which will provide supplemental hardware support, to this RIS area.**

Select the type of DIGITAL UNIX base product to create. If the software you are offering supports add-on hardware that is needed to boot the client system, select "boot-link" as the type of RIS area to create. Otherwise, select "standard". If you select "boot-link", the software will be extracted (or copied) to the RIS area because symbolically linked RIS areas do not support this feature.

Choose one of the following options:

- 1) Standard boot method
- 2) Boot-Link method

Enter your choice: **1**

6. **The next step is available only when the Standard boot method is chosen. Here, the utility lets you choose whether you want to create symbolic links to the software or to extract the software into the RIS area.**

Choose one of the following options:

- 1) Extract software from /mnt/ALPHA/BASE
- 2) Create symbolic link to /mnt/ALPHA/BASE

Enter your choice:

- If you choose to extract subsets (by choosing option 1), the subsets you select are copied from the device or directory specified into the RIS area. You must know which specific subsets to extract and the amount of disk space required. See Section 3.2 for information about planning disk space for RIS. Clients can install only the subsets that were extracted into RIS product areas for which they are registered. Using extracted subsets improves the performance

of the RIS environment. This is because copying software from magnetic media as opposed to optical media is faster. You must provide an extracted RIS area if you want to install a hardware product kit for a device not currently supported by the operating system. See Section 4.3 for additional information.

- If you choose to link to the device or directory specified (option 2), symbolic links are created in the RIS area that point to the subset directories on the device or directory specified. Disk space planning is not required because the subsets reside on the device or directory specified. However, the device or directory specified must be on line and mounted for clients to access the subsets. Unlike subset extraction, no subset selection is required. Clients registered for RIS product areas that are links to the device or directory specified can access all subsets.

Caution

Unmounting, deleting, or switching the device or directory where the RIS area is linked corrupts the RIS area. To restore the RIS area, remount the area pointed to by the RIS area.

You are prompted to enter the client architecture for products that are not part of base operating system that the RIS environment will serve:

```
Choose the architecture of the clients that the environment
will serve:
```

```
1) alpha
2) custom
3) mips
```

```
Enter your choice: 1
```

```
The new environment is in /usr/var/adm/ris/ris0.alpha.
```

7. If you chose to extract subsets, the utility lists the mandatory and optional software subsets you can install. Choose the subsets that you want from the list. The utility displays your list for confirmation. In the following example, only the mandatory software subsets are chosen. Your screen will look similar to this:

```
*** Enter subset selections ***
```

```
The following subsets are mandatory and will be extracted automatically
unless you choose to exit without extracting any subsets:
```

```
* Base System
* Base System - Hardware Support
* Java V1.1.5 Environment
```

- * Tcl Commands
- * Tk Toolkit Commands
- * Hardware Kernel Header and Common Files
- * Hardware Kernel Modules
- * Kernel Header and Common Files
- * Standard Kernel Modules
- * CDE Mail Interface
- * Basic Networking Services
- * NFS(tm) Utilities
- * Local Printer Support
- * Compiler Back End
- * Base System Management Applications and Utilities
- * Basic Networking Configuration Applications
- * Graphical Base System Management Utilities
- * Graphical Print Configuration Application
- * Graphical System Administration Utilities
- * NFS(tm) Configuration Application
- * Basic X Environment
- * CDE Desktop Environment
- * CDE Minimum Runtime Environment
- * Old X Environment
- * Netscape Navigator Gold V3.0

The subsets listed below are optional:

There may be more optional subsets than can be presented on a single screen. If this is the case, you can choose subsets screen by screen or all at once on the last screen. All of the choices you make will be collected for your confirmation before any subsets are extracted.

- General Applications :
 - 1) Additional Terminfo databases

--- MORE TO FOLLOW ---

Enter your choices or press RETURN to display the next screen.

Choices (for example, 1 2 4-6):

- 2) Computer Aided System Tutor
- 3) DOS tools
- 4) Local Area Transport (LAT)
- 5) Perl Runtime
- 6) UNIX(tm) SVID2 Compatibility
- 7) UNIX(tm) to UNIX(tm) Copy Facility
- 8) Xemacs Runtime

- Kernel Build Environment :
 - 9) ATM Kernel Header and Common Files
 - 10) ATM Kernel Modules
 - 11) Logical Storage Manager Kernel Modules
 - 12) POLYCTR advfs Kernel Modules

- Kernel Software Development :
 - 13) ATM Kernel Objects
 - 14) Hardware Kernel Objects
 - 15) POLYCTR advfs Kernel Objects
 - 16) Standard Kernel Objects

- Mail Applications :
 - 17) DECwindows Mail Interface
 - 18) RAND Corp. Mail Handler (MH)

- Network-Server/Communications :
 - 19) ATM Commands

```

    20) Additional Networking Services
    21) Dataless Management Services
    22) Remote Installation Service

- Obsolete Components :
    23) Obsolete Commands and Utilities
    24) Obsolete Locale databases

- Printing Environment :
    25) Adobe Font Metric Files

--- MORE TO FOLLOW ---
Enter your choices or press RETURN to display the next screen.

Choices (for example, 1 2 4-6):

- Reference Pages :
    26) Ref Pages: Admin/User
    27) Ref Pages: CDE Admin/User
    28) Ref Pages: CDE Development
    29) Ref Pages: Programming
    30) Ref Pages: Windows Admin/User
    31) Ref Pages: Windows Programming

- Software Development :
    32) CDA(tm) Software Development
    33) CDA(tm) for X/Motif Development
    34) CDE Software Development and Programming Examples
    35) DMI Software Development and Programming Examples
    36) GNU Revision Control System
    37) Java V1.1.5 Development Environment
    38) Ladebug Debugger Version 4.0-44
    39) Ladebug Debugger Version 4.0-44 Release Notes
    40) Ladebug Debugger graphical user interface
    41) Ladebug Debugger remote server
    42) Programming Examples
    43) Software Development Desktop Environment
    44) Software Development Tools and Utilities
    45) Source Code Control System
    46) Standard Header Files
    47) Standard Programmer Commands
    48) Static Libraries
    49) X Window and X/Motif Header Files
    50) X Window and X/Motif Programming Examples
    51) X Window and X/Motif Software Development
    52) X Window and X/Motif Static Libraries

- Supplemental Documentation :
    53) Java V1.1.5
    54) XIE Version 5 Online Documentation

- System Administration :
    55) Advanced File System Daemon

--- MORE TO FOLLOW ---
Enter your choices or press RETURN to display the next screen.

Choices (for example, 1 2 4-6):

    56) Advanced File System Graphical User Interface
    57) C2-Security
    58) C2-Security GUI
    59) DECEvent Base kit (Translation / Analysis)

```

```

60) DMI Runtime Environment
61) Environmental Monitoring
62) Kernel Debugging Tools
63) Logical Storage Manager
64) Logical Storage Manager GUI
65) POLYCTR advfs
66) Single-Byte European Locales
67) System Accounting Utilities
68) System Exercisers

- Text Processing :
  69) Doc. Preparation Tools
  70) Doc. Preparation Tools Extensions

- Windowing Environment :
  71) Adobe Fonts
  72) DECwindows 100dpi Fonts
  73) DECwindows 75dpi Fonts
  74) LK201 Keyboard Support
  75) LK401 Keyboard Support
  76) LK411 Keyboard Support
  77) LK421 Keyboard Support
  78) LK444 Keyboard Support
  79) PCXAL Keyboard Support
  80) X Customizations for OEM
  81) X Fonts
  82) X Servers Base
  83) X Servers for Open3D
  84) X Servers for PCbus
  85) X Servers for TurboChannel
  86) X/Motif 1.1

- Windows Applications :
  87) Additional DECwindows Applications

--- MORE TO FOLLOW ---
Enter your choices or press RETURN to display the next screen.

Choices (for example, 1 2 4-6):

  88) Additional X Applications
  89) CDE Additional Applications
  90) Demo X Applications
  91) Nested X Server
  92) Old Additional DECwindows Applications
  93) Virtual X Frame Buffer

Or you may choose one of the following options:

  94) ALL mandatory and all optional subsets
  95) MANDATORY subsets only
  96) CANCEL selections and redisplay menus
  97) EXIT without extracting any subsets

Enter your choices or press RETURN to redisplay menus.

Choices (for example, 1 2 4-6): 95

You are extracting the following mandatory subsets:

  Base System
  Base System - Hardware Support
  Java V1.1.5 Environment
  Tcl Commands

```

```

Tk Toolkit Commands
Hardware Kernel Header and Common Files
Hardware Kernel Modules
Kernel Header and Common Files
Standard Kernel Modules
CDE Mail Interface
Basic Networking Services
NFS(tm) Utilities
Local Printer Support
Compiler Back End
Base System Management Applications and Utilities
Basic Networking Configuration Applications
Graphical Base System Management Utilities
Graphical Print Configuration Application
Graphical System Administration Utilities
NFS(tm) Configuration Application
Basic X Environment
CDE Desktop Environment
CDE Minimum Runtime Environment
Old X Environment
Netscape Navigator Gold V3.0

```

Is this correct? (y/n):

If you enter `y`, the subset extraction process begins. If you enter `n`, the list of subsets is displayed again and you can restart your selection process.

When you confirm your selections, the `ris` utility extracts the subsets and displays the name of the new RIS environment. The RIS Utility main menu is then displayed.

Once you set up the RIS areas and register clients in those areas, the clients can access the areas they need. Client registration is discussed in Chapter 6.

4.2 Installing Software into an Existing RIS Area

To install software subsets that are compatible with the `setld` utility into an existing RIS environment, enter the following command as superuser and follow the procedures as they appear on the screen:

```
# /usr/sbin/ris
```

1. Next the RIS Utility Main Menu is displayed. Choose the option `INSTALL` software products by entering `i` at the prompt:

```

Checking accessibility of RIS areas... done

*** RIS Utility Main Menu ***

Choices without key letters are not available.

a) ADD a client
d) DELETE software products
i) INSTALL software products
) LIST registered clients

```

```
) MODIFY a client
) REMOVE a client
s) SHOW software products in remote installation environments
x) EXIT
```

Enter your choice: i

2. The RIS Software Installation Menu is displayed. Choose the option to Add software into an existing area by entering 2 at the prompt:

RIS Software Installation Menu:

```
1) Install software into a new area
2) Add software into an existing area
3) Return to previous menu
```

Enter your choice: 2

The utility displays a list of the existing RIS areas:

You have chosen to add a product to an existing environment.

Select the remote installation environment:

```
1) /usr/var/adm/ris/ris0.alpha
   'POLYCENTER advanced File System'
   'DECsafe Available Server Environment (ASE)'  
   'System V Environment'

2) /usr/var/adm/ris/ris1.alpha
   'Sort Runtime Library'
   'Free Software Foundation GNU Source (Rev xxx)'  
   'DEC Ada Support Library'
```

Enter your choice or press RETURN to quit:

3. Choose the area that you want to use, and then proceed as before to mount the distribution media and choose subsets. Press the Return key if you want to return to the RIS Utility Main Menu.
4. Repeat this procedure for each additional group of subsets you want to install.

4.3 Including Hardware Product Kits into a RIS Area

You may need to install hardware product kits, as well as the operating system base product kit, onto client systems; such a hardware product kit could be a third-party driver for a device not supported under Tru64 UNIX. The `ris` utility lets you include hardware product kits into a RIS area for subsequent installation on a client system.

This section describes how to set up the RIS area to include a hardware product kit, so that it can be used to perform a subsequent installation on a client.

The following is a list of the installation requirements:

1. The installation of hardware product kits can be done only on an extracted RIS area. An error message is displayed if you attempt to include a hardware product kit into a new RIS area or a RIS area which contains a symbolically linked base operating system.
2. The hardware product kit must be setld compatible to be included on an existing RIS environment.
3. The extracted RIS area should contain at least all the mandatory subsets as well as the following:

All Mandatory Subsets

Windowing Environment:

- Adobe Fonts
- DECwindows 100dpi Fonts
- DECwindows 75dpi Fonts
- LK201 Keyboard Support
- LK401 Keyboard Support
- LK411 Keyboard Support
- LK421 Keyboard Support
- LK444 Keyboard Support
- PCXAL Keyboard Support
- X Customizations for OEM
- X Fonts
- X Servers Base
- X Servers for Open3D
- X Servers for PCbus
- X Servers for TurboChannel
- X/Motif 1.1

To create the new hardware product kit area, hard links are made between the operating system base product and the new product that will contain the hardware support device kit. This permits the operating system base product and hardware product kit to coexist in the same RIS area using minimum additional magnetic disk space.

Execute the following procedures as superuser to install a hardware product kit into an existing environment. In the following example, the hardware product kit being installed is named ESA100.

Enter the following command to invoke the `ris` utility from the `root` system prompt:


```
# /usr/sbin/ris
```

1. The RIS Utility Main Menu is displayed. Chose the option `INSTALL` software products by entering `i` at the prompt:

```
Checking accessibility of RIS areas... done
```

```
*** RIS Utility Main Menu ***
```

```
Choices without key letters are not available.
```

```
a) ADD a client
d) DELETE software products
i) INSTALL software products
  ) LIST registered clients
  ) MODIFY a client
  ) REMOVE a client
s) SHOW software products in remote installation environments
x) EXIT
```

```
Enter your choice: i
```

2. The RIS Software Installation Menu is displayed. Choose the option `Add software into an existing area` by entering `2` at the prompt:

```
RIS Software Installation Menu:
```

```
1) Install software into a new area
2) Add software into an existing area
3) Return to previous menu
```

```
Enter your choice: 2
```

The following appears as a response to your entry.

```
You have chosen to add a product to an existing environment.
```

3. The utility asks you to specify the remote installation environment.

```
Select the remote installation environment:
```

```
1) /var/adm/ris/risl.alpha
   'DIGITAL UNIX V4.0F Operating System ( Rev nnn.n )'
```

```
Enter your choice or press RETURN to quit: 1
```

4. Enter the location of the software:

```
Enter the device special file name or the path of the directory where
the software is located (for example, /mnt/ALPHA/BASE): /HWKIT/MYVGA
```

5. You will now need to specify whether the software should be integrated with the base product or included as a separate product. Select 1 to integrate the software with the base product.

The kit you have specified has been identified as a DIGITAL UNIX kernel kit. This type of kit may contain software which is needed during the booting of the kernel for the installation due to required hardware support. If you need to add this kit to the base, select the option to integrate the kit. You may otherwise choose to add this kit to the RIS area as a separate product.

- 1) Integrate with Base product and include product
- 2) Include as separate product
- 3) Return to Main Menu

Enter your choice: [1]: 1

6. Specify the product to add to the kit.

Please select one of the following products to add the kit to.

- 1 'DIGITAL UNIX V4.0F Operating System (Rev nnn.n)'

Enter your selection or <return> to quit: 1

7. Choose whether to extract the software or provide a symbolic link. In this example, extract the software by selecting 1.

Choose one of the following options:

- 1) Extract software from /HWKIT/MYVGA/kit
- 2) Create symbolic link to /HWKIT/MYVGA/kit

Enter your choice: 1

The new hardware kit is now added to the area you selected.

During this phase the new product is created and the hard links between the products are made. Messages similar to the following are displayed at your terminal.

```
Preparing new product area...
Working...Tue Jul 6 13:47:48 EDT 1999
Working...Tue Jul 6 13:49:49 EDT 1999
Working...Tue Jul 6 13:51:50 EDT 1999
Working...Tue Jul 6 13:53:51 EDT 1999
Working...Tue Jul 6 13:55:52 EDT 1999
Working...Tue Jul 6 13:57:53 EDT 1999
Working...Tue Jul 6 13:59:54 EDT 1999
Working...Tue Jul 6 14:01:55 EDT 1999
Working...Tue Jul 6 14:03:55 EDT 1999
Working...Tue Jul 6 14:05:56 EDT 1999
Working...Tue Jul 6 14:07:57 EDT 1999
Working...Tue Jul 6 14:09:58 EDT 1999
Working...Tue Jul 6 14:11:59 EDT 1999
Working...Tue Jul 6 14:14:00 EDT 1999
```

The subsets listed below are optional:

There may be more optional subsets than can be presented on a single

screen. If this is the case, you can choose subsets screen by screen or all at once on the last screen. All of the choices you make will be collected for your confirmation before any subsets are extracted.

1) MYVGA Test kit

Or you may choose one of the following options:

- 2) ALL of the above
- 3) CANCEL selections and redisplay menus
- 4) EXIT without extracting any subsets

Enter your choices or press RETURN to redisplay menus.

Choices (for example, 1 2 4-6): 1

You are extracting the following optional subsets:

MYVGA Test kit

Is this correct? (y/n): y

Checking file system space required to extract selected subsets:

File system space checked OK.

Extracting MYGASTATIC100...

Media extraction complete.

The following software now exists in RIS product area

/var/adm/ris/ris1.alpha:

- 1 'DIGITAL UNIX V4.0F Operating System (Rev nnn.n)'
with 'MYGASTATIC software version 1'
- 2 'MYGASTATIC software version 1'

At this point, the new product area has been created and the hardware product kit installed into it.

4.4 Using a RIS Area Mounted on NFS

The information in this section can be used only if you are serving a version of the operating system prior to Version 4.0F.

You can use an NFS mount point to install software from a RIS area or an operating system distribution CD-ROM that you import from another machine. For example, if a system named `chicago` has a CD-ROM containing the operating system subsets mounted on `/mnt` and listed in its `/etc/exports` file, the system administrator on `newyork` can NFS mount that CD-ROM with the following command:

```
newyork_root# mount chicago:/mnt/ALPHA/BASE /mnt
```

After the CD-ROM is mounted, the system administrator on `newyork` can use the `ris` utility to install software from it as if it were local to `newyork`.

If another system has a RIS area with the needed subsets for a RIS area on the local system and exports that area, you can create a RIS area from the remote RIS area.

For example, if a system named `seattle` has the operating system subsets in its `ris0.alpha` product environment, the system administrator on `newyork` can NFS mount that product environment with the following command:

```
newyork_root# mount seattle:/var/adm/ris/ris0.alpha /mnt
```

After the remote product environment is mounted, the system administrator for `newyork` can use the `ris` utility to install software from it as if it were local to `newyork`.

4.5 Modifying the `/etc/exports` File

RIS client installations of the base operating system prior to Version 4.0F rely on files located in the server's `/var/adm/ris/risN.arch/kit` directories. The RIS server must export these directories..

For the Version 4.0F of the operating system base product, the `/var/adm/ris/risN.arch/product_1` product directory that is exported contains the distribution image. In this directory path, *N* is the number of the RIS area and *arch* is the architecture of the client systems that the area serves. When you create the RIS area, `risN.arch`, the `ris` utility supplies you with a name based on the choices you make when you create the RIS area.

The server's `/etc/exports` file must include an entry for each RIS area that it is exporting. When you create a RIS area, the `ris` utility automatically edits the `/etc/exports` file and adds the correct entry for that area. However, if you modify the path to a RIS area, you must also modify the corresponding line in the `/etc/exports` file.

- The RIS area entries in the `/etc/exports` file of a system that acts as a RIS server for two Alpha environments and one MIPS RISC environment look similar to the following:

```
/var/adm/ris/ris0.alpha/kit -root=0 -ro
/var/adm/ris/ris1.alpha/kit -root=0 -ro
/var/adm/ris/ris0.mips/kit -root=0 -ro
/ris/ris2.a/product_1 -root=0 -ro
```

- The previous example shows an entry in `/etc/exports` of `/ris/ris2.a/product_1`. This entry is created by RIS and is a symbolic link from `/ris/ris2.a/product_1` to `/var/adm/ris/ris2.alpha/product_1`. This is done to shorten the path that needs to be sent to the client during the boot process.

Note

When you register the first client on your RIS server for Version 2.0 and prior to Tru64 UNIX Version 4.0F, the `ris`

utility creates the `kit/isl` directory, which contains tools that clients require to install software subsets.

- When you create a `/risN.alpha` area, the path to the kit directory is `/var/adm/ris/ris0.alpha/kit` and the `ris` utility places the following line in the `/etc/exports` file:

```
/var/adm/ris/ris0.alpha/kit -root=0 -ro
```

If you create another directory in this RIS area, for example, `dsk1`, mount another file system there, move the contents of `ris0.alpha` to that directory and then link it to `ris0.alpha`, a listing of the RIS area shows the following entry:

```
ris0.alpha -> ./dsk1/ris0.alpha
```

The path to the kit directory is now effectively `/var/adm/ris/dsk1/ris0.alpha/kit`. You must edit the corresponding line in the `/etc/exports` file to read:

```
/var/adm/ris/dsk1/ris0.alpha/kit -root=0 -ro
```

If you fail to edit the `/etc/exports` file in this case, there will be a mount failure of the kit directory when you attempt a client installation.

5

Booting a RIS Client

This chapter describes the network files and daemons that the `ris` utility uses and the sequence of events that occur when a client broadcasts a `bootp` request. If you use RIS to install the operating system on a client, the client must boot across the network.

Note

The client must be registered on the RIS server before you can install the operating system.

5.1 Remote Boot Files and Daemons

Table 5–1 describes the files and daemons used by RIS servers to boot a remote client.

Table 5–1: Remote Boot Files and Daemons

Name	Description
<code>/etc/bootptab</code>	Contains information needed to boot remote clients
<code>/sbin/init.d/dhcp</code>	Script used to start <code>joind</code>
<code>/etc/inetd.conf</code>	Contains start-up information for various internet daemons
<code>/usr/sbin/joind</code>	The <code>bootp</code> server daemon (handles both <code>bootp</code> and <code>dhcp</code> requests, if configured)
<code>/usr/sbin/tftpd</code>	The <code>tftpd</code> server daemon
<code>/usr/sbin/inetd</code>	The Internet server daemon

5.1.1 Internet Daemon and its Configuration File

Network boots occur using the `bootp` protocol. This protocol is serviced by one of two daemons: `bootpd` and `joind`. The use of the `joind` daemon is recommended.

The `bootpd` daemon is started using the internet daemon, the `joind` daemon is not. The `inetd` daemon starts networking-related daemons on the system. Some of these daemons, such as `tftpd`, are related to RIS; others, such as `fingerd`, are not. On request, the `inetd` daemon starts any of the daemons listed in its configuration file, `/etc/inetd.conf`.

5.1.2 The bootp Daemon (bootpd or joind)

The `bootp` daemon handles remote boot requests. It handles any `bootp` requests received by the RIS server. As it starts up, the `bootp` daemon reads its `/etc/bootptab` file to determine the systems from which it will recognize remote boot requests. Whenever the `/etc/bootptab` file is modified, the `bootp` daemon rereads it.

Section 5.1.3 describes the content and format of the `/etc/bootptab` file. See `joind(8)` or `bootpd(8)` for more information.

5.1.3 The /etc/bootptab File

The `/etc/bootptab` file is a text file that contains information that a server needs to boot a remote client. The `ris` utility adds and removes entries from this file during client management. Other applications may also place entries in the `/etc/bootptab` file.

The general format for entries in the `bootptab` file is as follows:

tag: **tg=** *value...* : **tg=** *value...* : **tg=** *value...*

Example 5–1 describes the entries in the `/etc/bootptab` file for RIS clients.

For additional information about the contents of the `bootptab` file, see the `joind(8)` reference page.

Example 5–1: Sample /etc/bootptab File

```
.ris.dec:hn:vm=rfc1048 1  
.ris0.alpha:tc=.ris.dec:bf=/var/adm/ris/ris0.alpha/vmunix: 2  
atlanta:tc=.ris0.alpha:ht=ethernet:gw=16.69.224.222: \  
  ha=08002b309668:ip=16.30.0.143: 3
```


Example 5–1: Sample /etc/bootptab File (cont.)

```
.ris93.alpha:tc=.ris.dec:bf=/ris/ris93.a/vmunix: \  
rp="ds9:/ris/ris93.a/product_001":
```

4

-
- 1 The `.ris.dec` entry defines characteristics common to all clients. The fields specify the following:
 - `hn`: Tells the boot server to send the name of the client system to the client when it makes a boot request.
 - `vm`: Vendor-specific information
 - 2 The `.risN.arch` entry, in this example `.ris0.alpha`, defines characteristics common to all clients using this RIS area. The fields specify the following:
 - `tc`: Table continuation
The `tc` field lets you follow pointers back to common entries. For example, the `tc` entry for `.ris0.alpha` in Example 5–1 points to the `.ris.dec` entry. The `.ris.dec` entry contains the common hardware type (`ht`) and vendor specific (`vm`) information. The `.ris0.alpha` entry, itself, contains common information about the boot file location.
 - `bf`: Name of the boot file
 - 3 The `hostname` entry, in this example `atlanta`, defines characteristics for a specific client. The fields specify the following:
 - `tc`: Table continuation
The following describes the entry for the host `atlanta`: its `tc` entry points to `ris0.alpha`, which contains its boot file information. The `ris0.alpha`, entry in turn points back to `ris.dec`, which contains relevant hardware type and vendor specific information. If you added another host entry to the `/etc/bootptab` file, it would look similar to the following:

```
lee:tc=ris0.alpha:ht=ethernet:ha=08002b390668: \  
ip=16.140.64.249:
```
 - `ht`: The client's hardware type is either `ethernet`, `fddi`, or `ieee802` (for Token Ring)
 - `ha`: Client's network hardware address
 - `ip`: Client's IP address

4 The `.ris93.alpha` entry defines characteristics for the current version of the operating system RIS area. The fields specify the following:

- `tc`: Table continuation

The `tc` field lets you follow pointers back to common entries. For example, the `tc` entry for `.ris93.alpha` in Example 5-1 points to the `.ris.dec` entry. The `.ris.dec` entry contains the common hardware type (`ht`) and vendor specific (`vm`) information. The `.ris93.alpha` entry contains common information about the boot file location.

- `bf`: Name of the boot file
- `rp`: The `rp` parameter points the client to the point where it will mount its root on the server.

5.1.4 The `tftpd` Daemon

The `tftpd` daemon uses the Trivial File Transfer Protocol (TFTP) to transfer the boot file during a remote boot. This daemon starts when there is a file to be transferred. See the **TFTP** entry in the Glossary and the `tftp(1)` and `tftpd(8)` reference pages for more information.

5.2 Remote Boot Flow

Client systems use the `bootp` protocol to perform the remote bootstrap operation from a RIS server. The command used to initiate a remote boot is processor-specific. For additional information, see the *Installation Guide*. However, once the remote boot operation has started, the underlying process is the same for all versions of the operating system that support network booting:

1. The processor-specific remote boot command is issued at the client console prompt.
2. The client processor firmware sends a `bootp` packet over the Ethernet. This packet contains the hardware Ethernet address of the client.
3. The `bootp` server daemon compares the Ethernet hardware address in the packet with the client registration information stored in its `/etc/bootptab` file to determine if the client requesting the remote boot is registered to the server.
4. If the address matches one in its `/etc/bootptab` file, the `bootp` daemon sends to the client a packet of information that includes the server's Internet address, client's Internet address, and the name of

the file to be loaded from the server. This information was placed in the `bootptab` file by the `ris` utility when the client was registered on the server.

Internet addresses are used to set up a network that is used to download to the client processor the file specified in the `bootptab` file. For Tru64 UNIX RIS clients, this file is `/var/adm/risN.alpha/vmunix`, where `risN.alpha` corresponds to the RIS area to which the client is registered. This file is the Tru64 UNIX standalone operating system used to start the installation.

5. The client system requests the file from the server system.
6. The client and server system use the `tftp` protocol to transfer `vmunix` to the client.
7. Once `vmunix` is loaded, the client system begins to execute `vmunix` and the operating system standalone system messages are displayed on the client console terminal.

After the operating system is installed, the client is a self-supporting system. Follow normal procedures to boot the system from its own local disk.

6

Managing RIS Clients and Environments

This chapter describes how to use the `ris` utility to manage RIS environments and clients. Topics include:

- Preregistration tasks
- Adding a client
- Adding a hardware product kit
- Modifying a client
- Removing a client
- Listing registered clients
- Listing products in the server's RIS areas
- Deleting software products from the server's RIS areas
- Determining profile set registration for RIS clients
- Removing a RIS client from profile set registration
- Deleting profile sets from the RIS server

6.1 Preregistration Tasks

Before you register RIS clients, gather the information required for each one. The RIS Client Configuration Worksheet in Appendix A will help you organize your information as you register clients. Fill out a worksheet for each client you want to register.

Perform the following tasks to prepare to register clients:

1. Obtain information about each client and fill out a copy of the RIS Client Configuration Worksheet from Appendix A.
2. Register each client's host name and Internet Protocol (IP) address with the appropriate naming service Berkeley Internet Name Domain(BIND) Service and Network Information Service(NIS).

6.1.1 Obtaining Information About Each Client

You need the following information about each processor you plan to register as a client:

- Host name (see Section 6.2 for restrictions on host names)
- The RIS environments you want to make available to the client
- The hardware platform type of the client (MIPS, Alpha)
- The hardware network address of the client
- The address of the gateway from the client to the server, is required if the server and client are on different networks
- The type of network on which the client resides (Ethernet, FDDI, or Token Ring)
- Whether you want to use a profile set during installation

6.1.2 Registering Client Host Names and IP Addresses with Servers

If the host system is served by any of the following naming services, check with your site administrator to be sure that your clients are registered with the appropriate naming service servers:

- `/etc/hosts`
- Berkeley Internet Name Domain (BIND)
- Network Information Service (NIS), formerly called Yellow Pages (YP)

See the *Network Administration* guide for information about configuring naming services on a local area network and registering clients with them.

6.2 Adding a RIS Client with the ris Utility

To add a client processor to RIS, follow these procedures:

1. Invoke the `ris` utility by entering the following command at the root system prompt:

```
# /usr/sbin/ris
```

The RIS Utility Main Menu is displayed. Choose the option `ADD a client` by entering `a` at the prompt.

Checking accessibility of RIS areas.... done

*** RIS Utility Main Menu ***

```
a) ADD a client
d) DELETE software products
i) INSTALL software products
l) LIST registered clients
m) MODIFY a client
r) REMOVE a client
s) SHOW software products in remote installation environments
x) EXIT
```

Enter your choice: **a**

The following message is displayed:

You have chosen to add a client for remote installation services.

The following conditions must be met to add a client:

1. You must know the client processor's hostname.
2. The client's hostname must be in your system's host database(s).
3. You must know whether the client is on an Ethernet, FDDI, or Token Ring network.
4. You must know the client's hardware Ethernet, FDDI, or Token Ring address if the client is registering to install operating system software.
5. If the client and the server reside on different subnets, you will need the address of the gateway(s) that the client can use to communicate with the server.

Do you want to continue? (y/n) [y]:

If you enter **n**, the utility returns to the RIS Utility Main Menu. If you enter **y**, a prompt asks for the client's host name.

2. Enter the client's host name at the prompt.

Enter the client processor's hostname: **client1**

Only lowercase letters (a-z), numbers and the period (.) and dash (-) are permitted in host names, and a host name must begin with a letter. Invalid host names can corrupt the RIS database. Additionally, the client must not be registered on another RIS or DMS server as a client.

The client processor must be registered with the appropriate naming service or you cannot register the client with RIS. If the client is not registered with the appropriate naming service, the utility displays an error message and repeats the prompt.

3. Enter the environment to which you want to add the client. The utility displays the available environments (and the products installed in those environments) to which you can add the new client. Your output will be similar to the following example (which shows five environments):

Select the remote installation environment:

```

1) /usr/var/adm/ris/ris0.alpha
   'Sort Runtime Library'
   'Free Software Foundation GNU Source (Rev 214)'
   'DEC Pascal RTL V5.4 for DIGITAL UNIX Systems'
   'DEC C++ Class Libraries Version 4.0F for DIGITAL UNIX'
   'DEC Ada Runtime Library'

2) /usr/var/adm/ris/ris1.alpha
   'POLYCENTER advanced File System'
   'DECsafe Available Server Environment (ASE)'
   'System V Environment'

3) /usr/var/adm/ris/ris2.alpha
   'DIGITAL UNIX V4.0F Operating System (Rev nnn)'
   'DEC Runtime Library'

4) /usr/var/adm/ris/ris3.alpha
   'DIGITAL UNIX V4.0F Operating System (Rev nnn)'

5) /usr/var/adm/ris/ris5.alpha
   'Sort Runtime Library'
   'Free Software Foundation GNU Source (Rev nnn)'
   'DEC Pascal RTL V5.4 for DIGITAL UNIX Systems'
   'DEC C++ Class Libraries Version 4.0F for DIGITAL UNIX'
   'DEC Ada Runtime Library'

```

Enter your choice or press RETURN to quit: 4

4. Enter the number of the product you want this client to be able to install. When the utility asks you to confirm your choices, you can accept them or specify the information again. In the following example, the environment has only one product installed:

Select one or more products for the client to install from /usr/var/adm/ris/ris3.alpha:

```

Product      Description
  1      'DIGITAL UNIX V4.0F Operating System (Rev nnn)'
```

Enter one or more choices as a space-separated list

(for example, 1 2 3) or all for all products [all]: 1

You chose the following products:

```

  1      'DIGITAL UNIX V4.0F Operating System (Rev nnn)'
```

Is that correct? (y/n) [y]:

5. If profile sets containing configuration description files (CDFs) exist on the RIS server during the registration of a client, the following message is displayed:

Do you want to specify an Installation Profile Set for use during the installation of this client? [y/n] [n]: y

If you do not want to specify a CDF for installation cloning, chose n. If you enter y, RIS displays a list of the CDFs on the RIS server:

```
This RIS server has the following Installation Profile Sets available:
```

```
alphastation400 alphastation400a rz26
```

```
Enter a set name or press <Return> to exit set selection: rz26
```

After you enter a CDF profile set, a verification is performed to determine if a CDF exists in the profile set. The verification determines if the products in the RIS environment to which the client is registered and the products specified in the CDF are the same. The CDF is also validated as suitable for installation cloning.

If you decide not to register a client for a cloned installation or cannot determine a CDF to use, continue with the client registration by pressing Return.

6. Enter the type of network upon which this client resides:

```
Network type:
```

- 1) Ethernet or FDDI
- 2) Token Ring

```
Enter your choice: 1
```

7. The following message is displayed when the server and client are on different networks. The gateway information needed for the client to connect to the server is stored in the `/var/adm/ris/gateways` file. RIS displays the default network information if the gateway information is known, as shown in this example:

```
Using 16.69.144.199 for gateway address between client and server subnet.
```

If the network information is unknown, RIS displays the following message. Enter the client's gateway address as shown in the following example:

```
The gateway IP address between the client's subnet and the server's subnet is required to register this client. If you do not know the correct gateway IP address, contact your network administrator. DO NOT enter your system's IP address.
```

```
Enter the IP address of the gateway[s] between the client subnet and server subnet. (For example, 16.69.144.??). : 16.69.144.183
```

8. Enter the client's hardware network address as shown in the following example:

```
Enter the client processor's hardware network address.
```

```
For example, 08-00-2b-02-67-e1: 08-00-2b-01-16-47
```

If you do not know the client's hardware network address, you can obtain it in one of the following ways:

- On a client that is not currently running (you are at the boot prompt), issue the appropriate console command or commands for that type of client. Console commands are processor-specific, so you must refer to your hardware documentation for the correct commands. With the correct console commands, you can display the current environment variables or show the client's devices. The hardware address associated with the network interface or interfaces is displayed.
- On a client running the operating system, log in as `root` and execute the `uerf -r 300` command. In the output, find the string `hardware address`. Either that line or the next one contains the hardware address. For example:

```
# uerf -r 300 | grep -i "hardware address" | uniq
_hardware address: 08-00-2f-ef-1f-10
```

If the hardware address is on the line following the one that contains the string `hardware address`, you must search the output manually from the `uerf` command to find the correct hardware address.

- From the RIS server, you can determine the hardware address of a running client by using the `ping` and `arp` commands. To determine the hardware address of the RIS client `atlanta`, enter a command similar to the following example:

```
# /usr/sbin/ping -q -c1 atlanta; arp atlanta
PING atlanta.cities.dec.com (152.90.224.30): 56 data bytes
---atlanta.cities.dec.com PING Statistics---
1 packets transmitted, 1 packets received, 0% packet loss
round-trip (ms)  min/avg/max = 0/0/0 ms
atlanta (152.90.224.30) at 08-00-2B-03-09-BF
```

The hardware address in this case is `08-00-2B-03-09-BF`.

If you do not enter the address in the correct format, the utility displays an error message and repeats the prompt.

Note

Except for checking the format of the number you enter, the `ris` utility does not verify its validity.

When you enter the hardware network address in the correct format, the following message is displayed:

```
Client client1 has been added.
```

6.3 Adding a RIS Client from the Command Line

You can add a single RIS client from the command line by invoking the `ris` utility with its `-a` option. Other options supply the network address, path, and product list. The syntax of the command is:

```
/usr/sbin/ris -a clientname -h network-address -p path,product  
[,product...]
```

For example:

```
# /usr/sbin/ris -a fargo -h 08-00-2B-11-16-78 -p ris0.alpha,product_001
```

6.4 Adding a Client to a RIS Area with a Hardware Product Kit

To add a client to a RIS area that has hardware product kits, follow these procedures:

1. Invoke the `ris` utility by entering the following command at the root system prompt:

```
# /usr/sbin/ris
```

The RIS Utility Main Menu is displayed. Choose the option ADD a client by entering `a` at the prompt.

```
Checking accessibility of RIS areas.... done
```

```
*** RIS Utility Main Menu ***
```

```
a) ADD a client  
d) DELETE software products  
i) INSTALL software products  
  ) LIST registered clients  
  ) MODIFY a client  
  ) REMOVE a client  
s) SHOW software products in remote installation environments  
x) EXIT
```

```
Enter your choice: a
```

The following message is displayed:

```
You have chosen to add a client for remote installation services.
```

```
The following conditions must be met to add a client:
```

1. You must know the client processor's hostname.
2. The client's hostname must be in your system's host database(s).
3. You must know whether the client is on an Ethernet, FDDI, or Token Ring network.
4. You must know the client's hardware Ethernet, FDDI, or Token Ring address if the client is registering to install operating system software.
5. If the client and the server reside on different subnets, you will

need the address of the gateway(s) that the client can use to communicate with the server.

Do you want to continue? (y/n) [y]:

If you enter n, the utility returns to the RIS Utility Main Menu. If you enter y, a prompt asks for the client's host name.

2. Enter the client's host name at the prompt:

Enter the client processor's hostname: **columbia**

Only lowercase letters (a-z), special characters dash (-), and dot (.), and numbers are permitted in host names, and a host name must begin with a letter, not a number. Invalid host names can corrupt the RIS database. Additionally, the client must not be registered on another RIS or Dataless Management Services (DMS) server for bootp services.

The client processor must be registered with the appropriate naming service or you cannot register the client with RIS. If the client is not registered with the appropriate naming service, the utility displays an error message and repeats the prompt.

3. The following message states the existing environment:

The existing environment is /var/adm/ris/ris0.alpha.

4. The utility asks you to select the products to install; you may choose more than one.

Select one or more products for the client to install from /var/adm/ris/ris0.alpha:

Product	Description
1	'DIGITAL UNIX X4.0F-4 Operating System (Rev nnn)' with 'MYVGASTATIC software version 1'
2	'MYVGASTATIC software version 1'

Enter one or more choices as a space-separated list (for example, 1 2 3) or "all" for all products [all]: **all**

The utility displays your choices and asks you to verify them:

You chose the following products:

1	'DIGITAL UNIX X4.0F-4 Operating System (Rev nnn)' with 'MYVGASTATIC software version 1'
2	'MYVGASTATIC software version 1'

Is that correct? (y/n) [y]: **y**

5. If configuration description files (CDFs) exist on the RIS server during the registration of a client, the following message is displayed:

Do you want to specify a Configuration Description File (CDF) for Installation Cloning on this client? [y/n] [n] : **y**

If you do not want to specify a CDF for installation cloning, chose n. If you enter y, RIS displays a list of the CDFs on the RIS server:

```
This RIS server has the following Configuration
Description Files (CDF) available:
```

```
alphastation400.cdf alphastation400a rz26.cdf
Enter a CDF name or press <Return> to exit CDF selection:
rz26.cdf
```

After you enter a CDF, the CDF verification is performed. The verification determines if the products in the RIS environment to which the client is registered and the products specified in the CDF are the same. The CDF is also validated as suitable for installation cloning.

If you decide not to register a client for a cloned installation or cannot determine a CDF to use, continue with the client registration by pressing Return.

6. Enter the type of network to which this client is connected:

```
Network type:
```

- 1) Ethernet or FDDI
- 2) Token Ring

```
Enter your choice: 1
```

7. Enter the client's hardware network address as shown in the following example:

```
Enter the client processor's hardware network address. For
example, 08-00-2b-02-67-e1: 08-00-2b-39-96-68
```

If you do not enter the address in the correct format, the utility displays an error message and repeats the prompt.

Note

Except for checking the format of the address you enter, the ris utility does not verify its validity.

8. The client is added to RIS:

```
Client columbia has been added.
```

6.5 Modifying RIS Clients

You can modify a RIS client's network type, hardware network address, its RIS environment information, and the list of products it can install. You

cannot modify a client's IP or routing information. To modify a client's entry, follow these steps:

1. Invoke the `ris` utility and choose the `m` option to modify a client.
2. Choose the client you want to modify from the list displayed.

The remainder of the modification procedure is similar to the procedure for registering a client, as described in Section 6.1.

6.6 Removing RIS Clients

Follow these steps to remove a client:

1. Invoke the `ris` utility and choose the `r` option to remove a client processor.
2. Enter the name of the client processor to remove when prompted by the utility.
3. Verify that you want to remove the client processor.

After you confirm your choice, the utility deletes the client's registration.

When removal is complete, the utility returns you to its main menu.

You also can use a `ris` command line to remove several clients at once. The following example removes the clients `boston` and `tulsa`:

```
# /usr/sbin/ris -r boston tulsa
```

6.7 Listing Registered RIS Clients

To view the registered clients, invoke the `ris` utility and choose the `List Registered Clients` option. If there are no registered clients, the utility indicates this fact.

6.8 Listing Products in RIS Server Areas

To view the current products in a server's area, invoke the `ris` utility and choose the option to show products. You also can use a `ris` command line to show the products installed in a server's area. For example:

```
# /usr/sbin/ris -s
```

```
Show Products in RIS Server Areas:
```

```
1 /var/adm/ris/ris0.alpha
   DIGITAL UNIX V4.0F Operating System (Rev nnn)
```

6.9 Deleting Products from RIS Server Areas

To delete one or more of the current products in a RIS area, invoke the `ris` utility and choose the option to delete products. The utility asks you to choose a RIS area and then guides you through the procedure to delete products.

6.10 Determining Profile Set Registration for RIS Clients

To determine if a RIS client is registered to a profile set, examine the RIS database file, `/var/adm/ris/clients/risdb`, on the RIS server. The name of the profile set is specified in the fourth field; fields are separated by a colon. In the following sample entry in the `risdb` file, the client system `portland` is registered to the `engineering` profile set:

```
portland:08-00-2b-58-89-1c:ris2.alpha,product_1:engineering
```

6.11 Removing a RIS Client from Profile Set Registration

You can remove a client from profile set registration by using the `Modify` option from the RIS Utility Main Menu. When you are prompted to specify a profile set for the client, enter `n` or press `Return` to register the client without specifying a profile set.

6.12 Deleting Profile Sets from the RIS Server

If a profile set is no longer needed, you can delete it by removing the appropriate `profile_set` directory from the directory `/var/adm/ris/clients/sets`.

Examine the RIS database file on the RIS server, `/var/adm/ris/clients/risdb`, before deleting a profile set to ensure that no clients are registered to it. The name of the profile set is specified in the fourth field; fields are separated by a colon (`:`). In the following sample entry in the `risdb` file, the client `vallejo` is registered to the `accounting` profile set:

```
vallejo:08-00-2b-58-89-1c:ris2.alpha,product_1:accounting
```


7

Troubleshooting RIS

This chapter contains information to help you troubleshoot problems with your RIS system. Problems covered are categorized as:

- RIS lock files
- Client password expiration
- Root file system mounting
- RIS client registration
- RIS server response

7.1 RIS Lock Files

To prevent multiple users from performing operations on RIS areas simultaneously, the `ris` utility creates two lock files in the `/tmp` directory, `rislock` and `ris.tty.lock`. When a user is installing or deleting software from a RIS area. If the `ris` utility is run by another user or the same user on a different terminal, selecting `INSTALL` software products or `DELETE` software products from the RIS Utility Main Menu generates a message similar to the following:

```
The ris utility is currently locked while j_smith on //dev/tty3
is installing software. Try again later.
```

If the `ris` utility is stopped prematurely, these lock files may not be removed. If the lock files are not removed, the message displays even though no other user is using RIS.

If this occurs, you must delete the lock files from the `/tmp` directory.

Caution

Before deleting the lock files, ensure that no other user is using the `ris` utility.

7.2 Client Password Expiration

If the RIS server is using C2 security and the RIS password has been set to allow expiration, it is possible for the RIS clients to be denied service. If the RIS client receives a message similar to the following, the RIS password on the server probably has expired:

```
Cannot find the name for client using bin/getname. Check with the system
manager of your RIS server
```

To fix this problem, refer to Section 3.6.

7.3 Root File System Mounting

The installation media is mounted as the root file system for installation. This occurs in both the case of CD-ROM installation and RIS installations, so it is important that the installation media is mounted locally on the server. Due to NFS limitations, RIS cannot provide client access to files that are mounted remotely from another system. The distribution media or extracted RIS area must be available through a local mount point on the RIS server.

7.4 RIS Client Registration

Problems with RIS client registration that are discussed in this section include the following topics:

- No prompt for client hardware address
- Duplicate client hardware addresses
- Cloned client registration
- Client registered on multiple RIS servers
- Client not in RIS database

7.4.1 No Prompt for Client Hardware Address

The server requires a client's hardware address in order to boot the client over the network. The `ris` utility prompts you for the client's address during the registration process. If it does not, check the following:

- If the RIS area is linked to a CD-ROM
Check that the CD-ROM that is the target of the links is mounted.
- If the RIS area is serving a version prior to Version 3.0

Check that the mandatory update subsets for the release the server is serving are installed in the server's RIS area. Install the mandatory update subsets from the `/local_mnt/ALPHA/UPDATE` directory on the distribution CD-ROM. For example, if the CD-ROM is installed on `/mnt`, install the mandatory update subsets from the `/mnt/ALPHA/UPDATE` directory.

- If the RIS area is serving Version 3.0 and later

Check that the mandatory operating system subsets are installed into the RIS area. Install the mandatory subsets from the `/local_mnt/ALPHA/BASE` directory on the distribution CD-ROM. For example, if the CD-ROM is installed on `/mnt`, install the mandatory update subsets from the `/mnt/ALPHA/BASE` directory.

Note

The client can use the `setld` utility to load optional subsets or layered product subsets over the network. See the *System Administration* guide and the `setld(8)` reference page for more information about loading subsets with the `setld` utility.

7.4.2 Duplicate Client Hardware Addresses

RIS checks to ensure that no other client has the same hardware address. This can happen if a client's name has changed but has not been removed from the server. If a duplicate hardware address is found, a message is displayed like the one in the following example:

```
The hardware address provided, 08-00-2B-39-BA-BE, has already been
specified for another client, albany. Please check the hardware address
to ensure it is correct. If it is correct, then you will need to
deregister the client albany before continuing. If this client is not
currently registered, please contact your RIS system administrator.
```

If you see this message, follow the instructions provided:

1. Verify that the new client hardware address you entered is correct. If it is not correct, reregister the new client with the correct hardware address.
2. If the hardware address you entered is correct, deregister the existing client (in this example, `albany`), and reregister the new client.
3. If the existing client is not registered, contact your RIS system administrator.

7.4.3 Cloned Client Registration

A CDF is created as a result of a full installation. To use the CDF for installation cloning, the hardware configuration and the software subsets to load must be substantially similar. Before specifying a CDF for client installation cloning, RIS attempts to verify that the subsets specified in the CDF exist in the RIS area that the user has selected. If they do not match, the CDF is rejected. This error can occur if the version numbers of the subset do not match (for example, OSFBASE400 and OSFBASE440).

- The CDF can be used for installation cloning of a system that is registered to a different RIS area. In this first case, it is possible that the subsets contained in these RIS areas are different.
- The version of operating system served by the RIS area can be different from the version specified in the CDF. In this second case, there would be many missing subsets because none of the subsets specified in the CDF would be present in the RIS area.

In the event that a CDF is specified that contains the name of a software subset that is not present in the selected RIS area, the following message is displayed:

```
Enter a CDF name or press <Return> to exit CDF selection: rz26.cdf

The selected CDF, rz26.cdf, specifies software subsets that are not
present in the selected RIS environment. The missing software subsets are:
OSFSERPC440

Please select a different CDF.
```

7.4.4 Client Registered on Multiple RIS Servers

If the system will not boot or the system boots but is not able to mount the root file system, you should check to ensure that the RIS client is not registered for `bootp` service on multiple RIS or DMS servers. In order for the `bootp` protocol to work properly, it is important that the client be registered for `bootp` service on only one server. The client is registered for `bootp` service when they are registered for an operating system base product or when the client is registered as a DMS client.

It is possible for a RIS client to be registered to two RIS servers at the same time, given they are not both registered for the operating system base product on both servers and attempt to boot their systems using `bootp`.

7.4.5 Client Not in RIS Database

If a message appears on the client's console while you are performing a RIS installation that states that the client is not in the RIS database, check the following on the server:

- As shown in Section 7.5, check `/var/adm/ris/clients/risdb` to ensure the client's name is properly entered. If it is not, use the `ris` utility to add or modify the client's registration. Do not edit the `risdb` file directly; use the `ris` utility.
- If `/var/adm/ris/clients/risdb` contains the correct client name, you must determine the client's name as recognized by the name servers (for example, BIND or NIS). If no name servers are in use, check the `/etc/hosts` file. The client name must appear in the `/etc/hosts` file exactly as it appears in `/var/adm/ris/clients/risdb`. The `/etc/hosts` file contains the name by which the client is known at the server. The `/var/adm/ris/clients/risdb` database contains the name by which the client is known to RIS. The two names must match. If you are using the BIND or NIS name servers, use the `nslookup` command to find the name by which the client is known to the server.

If the `/etc/hosts` file or the name server and `/var/adm/ris/clients/risdb` both include the client, but one file uses the short client name and the other file uses the fully qualified domain name, you will have a problem. You may be able to solve the problem by editing the `/etc/hosts` file to include both the short and fully qualified domain name.

If you found a discrepancy between the files where `/etc/hosts` used the short name and `/var/adm/ris/clients/risdb` used the fully qualified domain name, you most likely have an error in your network configuration. It is recommended that you review the procedures used to configure your network and name servers and correct them before continuing with RIS installations.

7.5 RIS Server Response

Problems with RIS server response comprise several categories. Topics discussed in this section include the following:

- Servers using the `bootp` daemon
- Servers using the `joind` daemon
- Loading an incorrect kernel file

Boot failures often occur because the RIS server has invalid information. The `risdb` and `bootptab` files are involved in handling RIS clients, and you should check them in the order listed:

- `/var/adm/ris/clients/risdb`

This file is created and managed by the `ris` utility; it contains the utility's view of the environment. Run the `ris` utility to show the configuration for the client in question. Verify that the client is

registered and that its registration information is correct. If not, use the `ris` utility to add or modify the client's registration.

- `/etc/bootptab` (Tru64 UNIX servers only)

This file is not used exclusively by RIS which means that it can be edited for other purposes (such as Dataless Management Services), and the entry for your client could have been corrupted. Examine the client's `bootptab` entry to ensure that the entry agrees with both the `risdb` entry and the addresses and parameters of the equipment in your environment. The contents of the `/etc/bootptab` file are described in the `bootptab(4)` and `joind(8)` reference pages and in Section 5.1.3.

Caution

A RIS server should run either the `bootpd` or the `joind` daemon. A RIS server running both of these daemons is not supported, and results are unpredictable.

7.5.1 Servers Using the `bootp` Daemon

A server can respond to `bootp` requests from clients. If the server's information is correct for the client, but the server still fails to respond, enable logging of `bootp` messages on the server by editing the server's `/etc/inetd.conf` file and by modifying the line for `bootps` to include the `-d` option as a `bootpd` command argument. For example:

```
bootps dgram udp wait root /usr/sbin/bootpd bootpd -d
```

Then, find the process IDs for the Internet daemons. Send a HUP (hangup) signal to the `inetd` daemon so it will reread the `/etc/inetd.conf` configuration file, and kill the `bootpd` daemon. For example:

```
# ps x | egrep "inetd|bootpd"
 228 ?? I    0:00.93 /usr/sbin/inetd
 243 ?? I    0:00.91 /usr/sbin/bootpd
 9134 p2 S    0:00.23 egrep inetd|bootpd
# kill -HUP 228
# kill -KILL 243
```

Caution

You must kill the `inetd` daemon before killing the `bootpd` daemon.

It is not necessary to restart the bootpd daemon manually; the inetd daemon starts it automatically.

To track boot requests as they occur, run the `tail -f` command on the `/var/adm/syslog.dated/today's-date /daemon.log` file and boot the client. Many daemons other than the bootpd daemon log information to the `daemon.log` file; however, the log file shows a hardware address that matches the address in the `/etc/bootptab` file for the client.

If the client's boot requests are not logged, you can enable additional logging by editing the `/etc/inetd.conf` file, and add a second `-d` option to the bootpd command. Each additional instance of the `-d` option (up to three) increases reporting; the second instance enables the server to report all boot requests, even for client systems it does not recognize. This level of reporting should help you determine where in the system the request is being lost.

If you modify the `/etc/inetd.conf` file, restart the inetd daemon by sending it a HUP signal. Example 7-1 shows a section of a `daemon.log` file. It shows the data logged by various system daemons, including the bootpd daemon when run with two `-d` flags set.

Example 7-1: Sample daemon.log File

```
Jul 28 14:56:36 stlouis mountd[191]: startup
Jul 28 14:56:38 stlouis xntpd[235]: xntpd version 1.3 1
Jul 28 14:56:43 stlouis mold[269]: mold (V1.10) initialization complete
Jul 28 14:56:44 stlouis evd[272]: E003-evd (V1.10) initialization complete
Jul 28 14:56:45 stlouis internet_mom[275]: internet_mom - Initialization
complete...
Jul 28 14:56:45 stlouis snmp_pe[278]: M004 - snmp_pe (V1.10) initialization
complete
Jul 28 16:34:55 stlouis inetd[282]: /usr/sbin/bootpd: exit status 0x9 2
Jul 28 16:35:47 stlouis bootpd[1228]: bootpd 2.1a #0: \ 3
Fri Feb 05 00:32:28 EST 1999
Jul 28 16:35:47 stlouis bootpd[1228]: reading "/etc/bootptab"
Jul 28 16:35:47 stlouis bootpd[1228]: read 3 entries from "/etc/bootptab"
Jul 28 16:35:47 stlouis bootpd[1228]: request from hardware address \ 4
08002B2C9C6F
Jul 28 16:36:08 stlouis bootpd[1228]: request from hardware address \ 5
08002B309668
Jul 28 16:36:08 stlouis bootpd[1228]: found: host1.dec.com (08002B309668)
at (16.69.224.83)
Jul 28 16:36:08 stlouis bootpd[1228]: file /var/adm/ris/ris0.alpha/\
vmunix.host1.dec.com
Jul 28 16:36:08 stlouis bootpd[1228]: vendor magic field is 0.0.0.0
Jul 28 16:36:08 stlouis bootpd[1228]: sending RFC1048-style reply
```

1 Many daemons log information to this file.

2 Result of sending a HUP signal to the inetd daemon and killing the bootpd daemon.

- ③ A new `bootpd` daemon starts up in response to a boot request. The `bootpd` daemon reads the `/etc/bootptab` file as a part of its startup.
- ④ A `bootpd` request by a system with hardware address `08002B2C9C6F`. Because the system is not a client of this RIS server, its hardware address is not in the server's `/etc/bootptab` file.
- ⑤ A `bootpd` request by a system with hardware address `08002B309668`. The system is a client of this RIS server.

7.5.2 Servers Using the `joind` Daemon

To serve `bootp` requests from clients, the `joind` daemon, which also services Dynamic Host Configuration Protocol (DHCP) requests, should be running. DHCP enables the automatic assignment of IP address to clients on networks from a pool of addresses. The IP address assignment and configuration occurs automatically whenever appropriate client systems (workstations and portable computers) attach to a network. The current implementation of DHCP is based on the JOIN product by Competitive Automation. Ensure that the server's information on the client is correct, namely information contained in the `bootptab` file of the server as shown in Section 5.1.3. If the server still fails to respond, enable logging of `bootp` messages on the server by using the following procedure:

1. Check that the `joind` daemon is servicing your `bootp` request. This can be done by issuing the following command:

```
# ps -x | grep -E "joind"
393 ??      I          0:05.82 /usr/sbin/joind
26446 tty0   S +        0:00.01 grep -e joind
```

2. Determine the current setting of `JOIND_FLAGS` by issuing the following:

```
# rcmgr get JOIND.FLAGS
```

3. Stop the `joind` daemon by issuing the following command:

```
# /sbin/init.d/dhcp stop
```

4. Restart the daemon with debugging turned on by doing the following. Set the `JOIND_FLAGS` to indicate debugging is turned on.

```
# rcmgr set JOIND_FLAGS y -dx
  Where x is the level of debugging. A value from 0 to 9 is valid.
  Where y is the previously determined setting of the JOIND_FLAGS.
# /sbin/init.d/dhcp start -dx
```

Example 7-1 shows a section of a `daemon.log` file. It shows the data logged by various system daemons, including the `joind` daemon.

5. To turn off debugging, do the following:


```
# /sbin/init.d/dhcp stop
# rcmgr set JOIND_FLAGS y
    Where y is the previous determined setting of the JOIND_FLAGS.
@    determined.
# /sbin/init.d dhcp start
```

7.5.3 Loading an Incorrect Kernel File

If the server responds, but an incorrect kernel (`vmunix`) is loaded, it is possible that the server's RIS area is configured incorrectly. You can observe the loading process by editing the `/etc/inetd.conf` file and restarting the Internet daemon as described in the previous section. In this case you add the `-d` option to the line containing the `tftpd` command, as follows:

```
tftp dgram udp wait root /usr/sbin/tftpd tftpd -d /tmp /var/adm/ris
```

Logging the server's `tftp` traffic shows you what file is being transferred and what time the transfer is started and finished. Ensure that the proper `vmunix` file is being loaded and that the loading operations are completed correctly.

Using RIS for Installation Cloning

Installation cloning lets an administrator copy the installation configuration from a model system (with the latest version of the operating system already installed) on to one or more systems with the same or similar hardware configurations.

This chapter explains how to use RIS to set up and manage cloned installations. Also discussed are the benefits of cloning and the files associated with cloning.

8.1 Benefits of Installation Cloning

Using installation cloning to mass-install systems can have the following benefits:

- You can produce identical installations.
- You can set up the installation cloning process to run with minimal user intervention.
- You can save time and reduce the chance of error in environments because installation cloning eliminates the need to perform duplicate installations on all systems.
- You can administer software centrally, instead of attempting concurrent installations with locally-mounted removable media such as CD-ROMs.

8.2 Using CDFs and User-Supplied Files

Configuration description files (CDFs) are used for the installation cloning process. Optionally, user-supplied files also can be used for preinstallation and postinstallation processing.

Installation cloning files can be located on various media, including diskette, the `/isl` directory on a CD-ROM or extracted RIS area, or the `/var/adm/ris/clients/sets/profile_set` directory on a RIS server. If you have a special license agreement to copy and repackage the operating system, files can be written to the `/isl` directory of the image to be written to the CD-ROM. For additional information including the use of other media for installation cloning, refer to the *Installation Guide*.

8.2.1 CDFs

The process of installing the operating system automatically generates a configuration description file that contains the results of the questions answered during the installation. This file is located in the `/var/adm/smlogs/install.cdf` file on the installed system. The CDF contains all the configuration information required to perform an initial system installation on a client system. You use the CDF from a model system (with modifications, if necessary) for the installation cloning process.

Both systems, the one where the CDF was generated and the system to be installed, must have the same disk configuration. This means that the disks used for the `/` (root), `/usr`, and `/var` file systems and swap areas on both systems must have the same disk type and the same device name. Some slight configuration differences are supported. Refer to the *Installation Guide* for a description of these acceptable differences.

8.2.2 User-Supplied Files

The installation cloning process lets you invoke user-supplied files that contain scripts, programs, or executables to perform user-defined customizations. These files can be provided on diskette, a RIS server, or in the `/isl` directory of the distribution media (either on CD-ROM or an extracted RIS area). Refer to the *Installation Guide* for information about copying files to distribution media.

User-supplied files are invoked first before the actual installation process begins, before any file systems are created and software is installed. At that time, an administrator may want to write a new disk label onto a specific disk to customize disk partitions. This file must be named `preinstall` for full installation cloning and `update-preinstall` for update installation cloning.

User-supplied files are invoked after the software is installed. At that time, an administrator may want to install a customized software application after the installation of the operating system base software subsets. This file must be named `postload` for full installation cloning and `update-postload` for update installation cloning.

Refer to the *Installation Guide* for information about creating `preinstall`, `update-preinstall`, `postload`, and `update-postload` files for execution during an installation cloning process.

CDFs are used only for an installation cloning process. Optionally, user-supplied files also can be used in the installation cloning processes.

CDFs and user-supplied files can be used independently or in any combination, and can be located on different sources. For example, the

`install.cdf` file may be on a diskette, the `preinstall` file might come from the RIS server, and the `postload` file might come from the `/isl` directory of the distribution media.


The installation process searches for the `install.cdf`, `preinstall`, and `postload` files in the following order:

1. The `/` (root) directory of diskette drive `/dev/fd0` or `/dev/fd1`. If a diskette is used, it requires a standard UNIX File System (UFS).
2. The `/var/adm/ris/clients/sets/profile_set` directory on a RIS server where `profile_set` is a user-created directory name.
3. The `/var/tmp` directory on the system to be installed. Remember that CDFs and user-supplied files cannot be delivered in the `/var/tmp` directory. They can, however, be copied into this directory by executing a `preinstall` or `update-preinstall` file that previously has been customized to manipulate a CDF or other user-supplied file.
4. The `/isl` directory of the distribution media (for CD-ROM or RIS installations) or the `/isl` directory of an extracted RIS area (for RIS installations only).

8.3 RIS Administrator Tasks

To set up a system for installation cloning, you must perform the tasks described in Figure 8-1. The numbered list after the task summary describes the task in more detail and provides pointers to more information.

Figure 8–1: Summary of Administrator Tasks

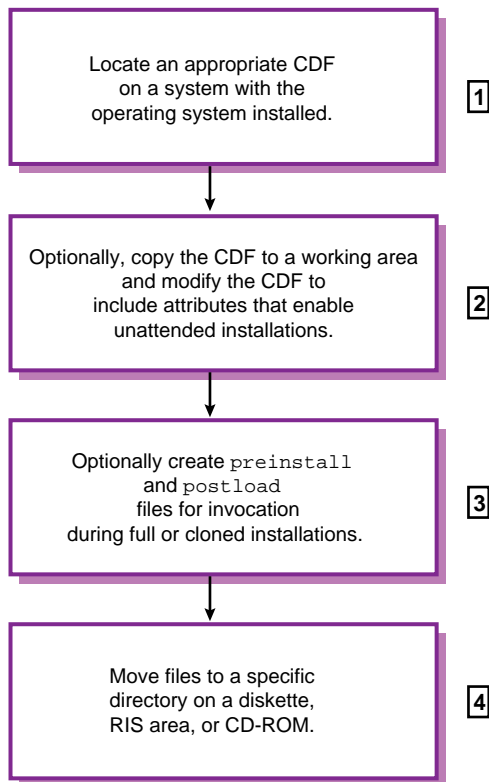

- 1** Locate a CDF that is suitable to use for installation cloning (on Tru64 UNIX Version 4.0F systems, the CDF is located in the `/var/adm/smlogs/install.cdf` file). One CDF is generated for each system installation. Refer to the *Installation Guide* for a description of the CDF contents and what makes a CDF suitable for installation cloning, and for information about acceptable differences between the CDF and the systems to be cloned.
- 2** Copy and move the model CDF to a working area where, optionally, it can be modified for installation cloning. You should make a copy of the `/var/adm/smlogs/install.cdf` file, then move and modify the copy. The original CDF should be retained in the `/var/adm/smlogs` directory because it contains information about the initial system installation that could be valuable for future troubleshooting. You can modify the CDF so that the installation bypasses all of the user responses usually required during an installation cloning process. Refer to the *Installation Guide* for information about the attributes in the CDF that can be modified for unattended installation cloning.

- 3] Optionally, you can create scripts or programs to be executed at two predefined points in the full installation and installation cloning processes. You determine the actions performed by these user-supplied files. Refer to the *Installation Guide* for information about creating `preinstall` and `postload` files for execution during an installation.
- 4] Copy the modified CDF and any user-supplied files to the `/var/adm/ris/clients/sets/profile_set` directory on a RIS server. Refer to Section 8.4 for information about copying the CDF and user-supplied files to a RIS server, and to the *Installation Guide* for information about copying the CDF and user-supplied files to other types of distribution media.

8.4 Copying Files to the RIS Server

It is your responsibility to place the `install.cdf` file, the `preinstall` or `update-preinstall`, the `postload` or `update-postload` files, and all files they require into the appropriate directories so that the installation process can find them.

Caution

The information contained in this section applies to RIS servers running Version 4.0F or higher of the operating system. This functionality was different on RIS servers running Version 4.0D or 4.0E. For information about copying the CDF and user-supplied files to a RIS server running an earlier version of the operating system, see the installation documentation for that version.

Depending on how you want to deliver the CDF and related files, you can copy them to the `/var/adm/ris/clients/sets/profile_set` directory on the RIS server to which the client system is registered.

During an installation cloning, the cloning process searches for the CDF and user-supplied files in the following order of priority:

1. Diskette drive `fd0` or `fd1`.
2. The `/var/adm/ris/clients/sets/profile_set` subdirectory on the RIS server.
3. The `/var/tmp` directory on the system to be installed.
4. The `/isl` directory on the distribution media (local CD-ROM or extracted RIS area). Refer to the *Installation Guide* for information about copying files to distribution media.

8.5 Profile Sets

RIS supports client registrations to both RIS environments and profile set directories, maintaining the CDFs and user-supplied files in logically organized subdirectories created by the RIS administrator. These subdirectories, known as **profile sets** must be located within the `/var/adm/ris/clients/sets` directory. The administrator uses the `mkdir` command to make profile set directories.

A profile set is a directory that contains the files used during an installation process. The `sets` directory can contain many profile sets. Each of the profile set directories may contain a CDF (`install.cdf`), a preinstallation file (`preinstall` or `update-preinstall`), a postinstallation file (`postload` or `update-postload`), and all files called by the `preinstall` and `postload` files. All files are optional; they can be used independently or in any combination. It is the RIS administrator's responsibility to place the appropriate files into the correct profile set directory.

Any `profile_set` directories you create depend upon your working environment and how you want to logically organize the functions of the CDFs and user-supplied files. If your site or facility requires engineering workstations to be installed and configured different from the workstations in the accounting department, you might want to create two profile set directories; one named `engineering` and one named `accounting`. Those profile sets would contain the CDFs and files that were created to suit the configuration needs of both departments.

Another hypothetical situation for defining profile sets is one in which separate CDFs and files are maintained for server type systems and workstation type systems. Profile set directories named `server` and `workstation` might be set up under that scenario.

Use procedures similar to the following to copy the CDF, `preinstall` or `update-preinstall` and `postload` or `update-postload` files, and any related files to a profile set directory:

1. Change to the `/var/adm/ris/clients/sets` directory, and using the naming scheme of your choice, create a profile set directory with an appropriate name:

```
# cd /var/adm/ris/clients/sets
# mkdir engineering
```

2. Change to the new profile set directory to ensure that files are copied to the correct directory:

```
# cd engineering
```


3. Copy the modified CDF (and optionally the `preinstall`, `postload`) and all other related files from your working area to the new engineering profile set directory with your preferred copy tool (`ftp`, `dcp`, or `rcp`).
4. Enter the `chmod` command to ensure all files have execute permissions:

```
# chmod 755 *
```

The asterisk (*) is a wildcard character that represents all files in the directory.

After you copy the appropriate CDF and other files to the profile set directory, you can register RIS clients for installation cloning or for user-defined file invocation during a full RIS installation. You do this by registering new clients to a RIS environment as well as to a profile set. If a RIS client is registered to a profile set and boots across the network to start an installation, the order of priority in which a search for a CDF and other optional files is done is shown in Section 8.4. If a CDF is found, it is retrieved and used by the installation process to provide the answers to all installation configuration questions.

The following differences are seen in the user interface when profile sets are involved:

- When RIS is invoked for the first time on a system that has been updated to a version of the operating system that has supported installation cloning (or higher), the existing RIS area is converted. In previous versions of the operating system, CDFs were located in the `/var/adm/ris/clients/cdf` directory and could have any file name.

The conversion process converts all existing CDFs into profile set directories. The new profile set directory has the same name as the original CDF and the original CDF is renamed to `install.cdf`. If the original CDF name could not be used to name the new profile set directory, a unique profile set name is created by appending a digit (starting with the number one) to the original CDF name.

The first time RIS is invoked after the operating system has been installed, conversion messages are displayed. For example:

```
Converting old cdf directory to new sets directory format...
CDF File acctng moved to set acctng and renamed install.cdf
CDF File acctng.cdf moved to set acctng1 and renamed install.cdf
CDF File acctng1.cdf moved to set acctng11 and renamed install.cdf
CDF File acctng.cdf2 moved to set acctng12 and renamed install.cdf
done
```

After the profile sets are converted, these messages are not displayed again.

- During RIS client registration, if at least one profile set directory exists, you are asked if you want to specify a profile set. For example:

Do you want to specify an Installation Profile Set
for Installation Cloning on this client? [y/n]

If no profile set directories exist, the question is not displayed.

If you enter y, a list of available profile sets is displayed for selection.

For example:

This RIS server has the following Installation Profile Sets available:

acctng acctng1 acctng11 acctng12

Enter a set name or press <Return> to exit set selection: acctng

You have selected the acctng installation profile set.

This set contains the following files:

install.cdf preinstall postload DLSAVE

Once you select a profile set, RIS validates the CDF to ensure that the software subsets specified in the CDF match the software subset names and version numbers present in the RIS environment to which the client system is registered. User-supplied files are not validated in this step.

Dataless Management Services

This chapter describes Dataless Management Services (DMS), the dataless management utility (`dmu`), the requirements for setting up a DMS environment, and the relationship between DMS servers and clients.

9.1 What is the Dataless Management Services Environment?

In a Dataless Management Services (DMS) environment, a server system maintains the `root`, `/usr`, and `/var` file systems for all client systems. The server maintains one copy of `root` for each client. The `/usr` file system is exported read only and is shared by all clients registered to the environment. Client systems have their own `/var` file system. All swapping and dumping is done on the client's local disk.

The dataless management utility (`dmu`) creates a `root` file system based on the software subsets installed in the DMS environment area on the server. This `root` file system is accessed by client systems over a local area network (LAN). DMS lets system administrators customize the `root` and `/usr` file systems before client systems access them.

You must have superuser privileges to perform many of the `dmu` functions.

9.2 Benefits of Dataless Management Services

The advantages of installing DMS are:

- Less disk space is required on client systems. By sharing the `/usr` area, you eliminate the need for disk space to hold a separate `/usr` area for each client. For Alpha systems, you can save more than 200 megabytes (Mb) for each client.
- Installation and setup of servers and clients are done by automated scripts, thereby simplifying the task of the server system administrator. Maintenance of the DMS areas is similarly straightforward.
- Because the DMS files reside on the server, the server's system administrator can perform most system management tasks. The

involvement of individual users with the complexities of system management is reduced.

9.3 Relationship Between DMS Servers and Clients

The DMS utility, `dmu`, manages the sharing of installed operating system software between servers and clients in a LAN. In addition to the server's normal disk area, one or more disk partitions are reserved as the DMS area. The DMS area is made up of one or more product environments and client areas.


9.3.1 DMS Server

The DMS server maintains multiple copies of the `root` area, one for each client. Each copy is in a client `root` directory in the DMS area and is customized for the client in order to provide for differences between hardware platforms or environmental requirements. Each of the client `root` directories is private; this means that there is a directory for each client so that no conflict or confusion exists between clients. The server's DMS `root` and `/usr` areas are made available to clients by means of the Network File System (NFS). For more information about the NFS used by the operating system, refer to the *Network Administration* guide.

Beyond verifying clients' identities, vectoring their boot requests, and providing their system disk space, the server does not interact directly with the clients. The server can support local timesharing users and need not be dedicated to DMS.

A DMS client's system disk space (`root` and `/usr` areas) is physically connected to the server instead of to the client. The client accesses that disk area through a LAN connection with the server. Each DMS client is booted across the network from its private `root` area on the server. Once booted, the client continues to use its `root` files and `/usr` files from the server's DMS area. These files appear to the client as if they were on local disks, as shown in Figure 9-1.

Figure 9–1: File Sharing Between the DMS Server and Client

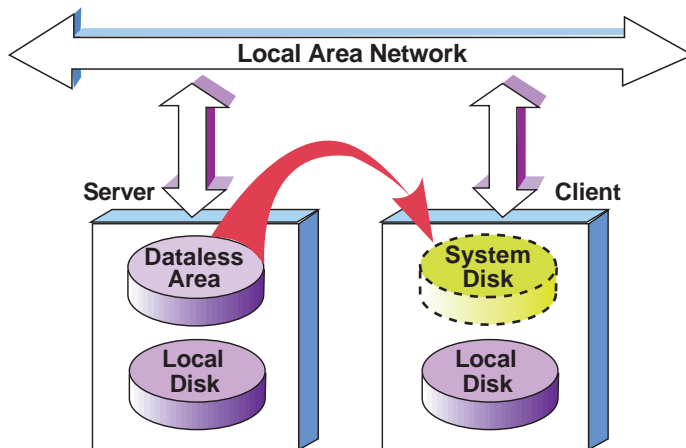

ZK-0934U-AI

As indicated in Figure 9–1, clients must have local disks. In addition to local disks, clients can import file systems from any other computer to which they have network access. Clients use swap and dump space on their local disks.

9.3.2 Environment Portion of DMS Area

One or more **DMS environments** can reside in a partition. If you want to prevent the `dmu` utility from putting all DMS environments in the same disk partition, indicate a unique mount point for each DMS environment. The DMS environment disk space requirements should be calculated using the worksheets in appendix B. Then the mount point of `./dmsn.alpha` should be added to `/etc/fstab`.

Each DMS environment contains a customized directory and file system, consisting of `root`, `/usr`, and `/var`. The `dmu` utility copies the `root` area to the client area when a client is added to the dataless environment.

Figure 9–2: Environment Portion of DMS Area

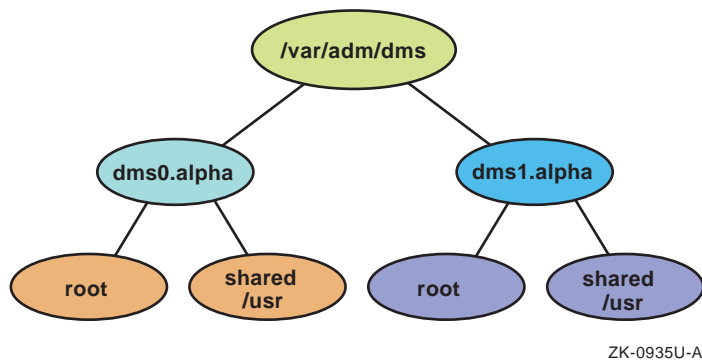


Figure 9–2 shows the `/var/adm/dms` portion of a DMS area, it contains two DMS environments, `dms0.alpha` and `dms1.alpha`. Each DMS environment contains a `root` and `/usr` file system. The `root` file system is copied to each client system. The `/usr` file system is read only and is shared among all client systems registered to the environment.

The `root` file system contains copies of the kernel, `.vmunix`, `vmunix` and other primary system files. These primary files can be in either **new** form (files supplied in the operating system distribution kit and prefixed with `.new..`) or in **prototype** form (files prefixed with `.proto..`).

The `.new..` version of a file should never be customized.

The `.proto..` files have special significance for DMS environments. By modifying the `.proto..` files, the DMS server system administrators can customize the system to meet their specific needs. These customized `.proto..` files are used during the configuration of the server's DMS client environments. Standard files (such as `/etc/hosts` and `/etc/fstab` for example) can be modified so that clients do not have to modify them.

The `/usr` file system contains common files that can be used without being tailored by clients registered to the DMS environment.

than allowed by the disk space available in


DMS environments can be created with different combinations of products to allow servers to provide diversified service based on client's software product needs. For example, you could have a DMS environment with only the base operating system. Another DMS environment could have the base operating system plus any number of additional products installed (such as `DECLdebug` or `DEC Fortran`). Multiple environment areas can be established in separate partitions to support a variety of environments, or to improve performance, or to support more clients `/var/adm/dms`.

The server does not use any of the DMS area. System administrators can access the DMS area as required for maintenance and for installation or removal of layered products, but the area is not used by the server itself.

9.3.3 Client Portion of DMS Area

A DMS **client area** for individual client systems also resides in a DMS area. Figure 9–3 shows a DMS client area, named `/clients`. The `/clients` area most likely should be located on its own partition after the size of the area is calculated using the worksheets in Appendix B. Then, the mount point of `/clients` should be added to the `/etc/fstab` file.

Figure 9–3: DMS Client Area

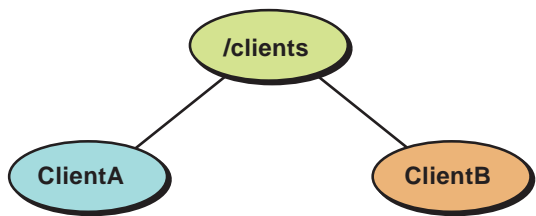

ZK-0936U-AI

Multiple copies of the `root` file system reside in the client area, one for each client, tailored from the appropriate generic `root` file system. Each client builds a customized kernel, which resides in the client's `root` area if the client has a Partial or Full build environment. This customized kernel supports the client's actual system configuration, including central processor, system memory, and peripheral devices. Figure 9–3 shows two client `root` areas, named `ClientA` and `ClientB`. Each client sees its private `root` area and the shared `/usr` area from the appropriate `/var/adm/dms` environment as local, although these areas are actually on the server and are accessed through NFS. Figure 9–4 shows how clients share `/usr` and have their own `root` file system.

Multiple client areas can be established but must reside in different partitions.


9.3.4 Characteristics of DMS Clients

Clients do not have access to the entire DMS area. Each DMS client has access to the `root` area assigned to it on the server.

Common system files residing in the `/usr` area are shared among all the clients registered to that particular `/var/adm/dms` environment. Mounted

with read-only access for the clients, this shared area is protected from erroneous client activity. Figure 9-4 illustrates this concept.

Figure 9-4: Client Views of the DMS Area

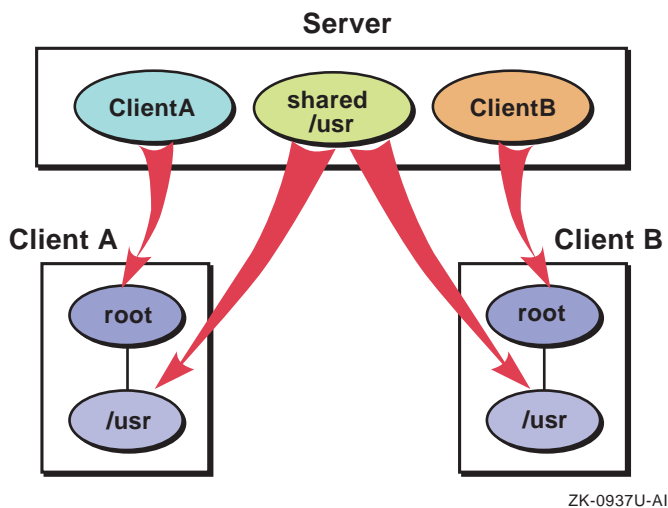

In Figure 9-4, the small boxes represent what the clients think they see; the arrows show how the real disk areas on the server are mounted by the client to produce this view.

Clients can be timesharing systems or workstations. Because each client's `root` area is tailored specifically to the client's needs and would contain the software the client can run, there is no interference between clients attempting to use identical resources that could, for example, have licensing restrictions based on the number of concurrent users.

10

Preparing DMS Servers and Clients

This chapter describes the tasks that you must perform to set up a DMS server. Information includes:

- Requirements for DMS servers and clients
- Allocating disk partitions for DMS
- Setting up a local area network (LAN) and a Network File System (NFS)
- Planning and calculating disk space requirements for DMS
- Installing the operating system software on the DMS server
- Information required for DMS clients
- Registering DMS clients with network naming services
- DMS Security issues

10.1 Requirements for DMS Servers

Setting up a dataless environment requires that the following conditions be met for DMS servers:

- For client systems running Version 4.0F, the server must have Version 3.0 or higher of the operating system installed. The server can be any Alpha processor, with the exception of those noted in Section 1.3. A single server can serve both DMS and RIS clients, however, a client cannot be registered to both. DMS servers can only serve clients running Version 3.0 or higher of the operating system.
- The DMS server must have the following software subsets installed:
 - Additional Networking Services (OSFINET)
 - Dataless Management Services (OSFDMS)
- The DMS server must have the OSF-SVR or UNIX-SERVER Product Authorization Key (PAK) loaded and registered. The OSF-SVR or UNIX-SERVER license allows an Alpha system to be a server.

Note

Software licensing lets you run software in a shared environment. As a minimum, the OSF-SVR or UNIX-SERVER software license must be installed for a system to be a server. See *Software License Management* for more information about software licensing.

- The DMS server must be able to install software into the DMS area:
 - The DMS server can have a CD-ROM optical disk drive to install software subsets for one or more specific products from the CD-ROM to the DMS area on the server.
 - The DMS server can use a Network File System (NFS) mount point to install software from a Remote Installation Services (RIS) area or an operating system distribution CD-ROM from another processor. See Section 4.4 for more information about using an NFS mounted RIS area.
- The DMS server must have at *least* one separate disk partition where the DMS environment and client areas reside because the `root` would not be large enough for many `client` areas and `var` likely would fill up after one environment was added. Smaller disks may not hold an entire DMS area.
- NFS must be set up on the DMS server.
- The DMS server and all DMS clients must be connected to an Ethernet or FDDI local area network (LAN).

10.2 Requirements for DMS Clients

Setting up a dataless environment requires that the following conditions be met for DMS clients:

- DMS clients must have a disk drive large enough to accommodate dump and swap file systems (approximately 200 Mb).
- DMS clients must be registered with the server in one of the following ways:
 - Register the DMS client through either the NIS naming service using Network Information Service (NIS) or the BIND naming service using BIND Configuration Application.
 - Create an entry for the DMS client in the server's `/etc/hosts` file either by using Network Configuration Application or by manual entry using a text editor.

- DMS clients must be capable of booting over Ethernet or FDDI using the `bootp` and `tftp` protocols. This is the same requirement to be able to install the operating system from a RIS server. Most Alpha workstations and desktide servers have this capability, but most data center servers would not be configured as DMS clients. Consult your system's hardware documentation to determine whether it supports `bootp` and `tftp` over Ethernet or FDDI.
- The client must not be registered on another RIS or DMS server.

10.3 Allocating Disk Partitions on the DMS Server

The DMS server must have at least one separate disk partition to contain the DMS environment and client areas because the `root` would not be large enough for many `client` areas and `var` likely would fill up after one environment was added. Deciding how to allocate disk partitions is critical to the performance of dataless management. Consider the following factors when allocating disk partitions for the DMS environment

(`/var/adm/dms/dmsN.alpha`) and `client` (`/clients`) area:

- The number of physical blocks available compared to the number of blocks required by the environments you expect to create on the disk.
- Spreading environments with large numbers of registered clients among different disks to reduce disk contention.
- Protecting against disk failures by using the Logical Storage Manager (LSM).
- Using the Advanced File System (AdvFS) on certain disks for faster system recovery. Refer to the *POLYCENTER Advanced File System Utilities Technical Summary* and the *System Administration* guide for more information about AdvFS.

Refer to the *System Administration* guide for more information about disk partitioning.

10.4 Setting Up a Local Area Network (LAN)

You must connect the DMS server and all of the client processors to an Ethernet or FDDI LAN. For instructions on setting up a LAN, refer to the *Network Administration* guide.

10.5 Setting Up a Network File System

The Network File System (NFS) must be set up before you install DMS. For instructions on setting up NFS, refer to the *Network Administration*

guide. After you install NFS, ensure the `portmap`, `mountd`, `nfsd`, and `nfsiod` daemons are running by entering the following command:

```
# ps ax | grep -E "portmap|mountd|nfsd|nfsiod"
```

If these daemons are not all running, start the inoperative ones. Refer to the appropriate reference pages for information about starting these daemons. Enter the following command to display reference pages (this example shows how to display the reference page for the `portmap` daemon):

```
# man portmap
```

10.6 Planning Disk Space for DMS

You must calculate the amount of disk space required to ensure that you have enough space in the DMS areas in which the `dmu` utility will be created. DMS clients' system disk space is located on the server in a DMS area. See Section 9.3.2 for a description of the DMS area's contents. A server can have multiple DMS areas in which some of the files (for example the contents of the `/usr` area) are duplicated. This necessary duplication imposes additional space requirements on the server.

Throughout this guide, the server's environment file systems are designated as `/var/adm/dms/dmsN.alpha` and `/clients/hostname` where `hostname` is the name of the client. The root areas are designated `dmsN.alpha` where the letter `N` represents the number assigned to the specific file system or common root area when it is installed. The client's private portion of the common root area is designated `/clients/hostname`.

Disk space is required on the server for each DMS server area file system. The following sections provide guidelines for estimating the disk space required by the DMS area.

Appendix B contains worksheets to help you calculate your space requirements.

10.6.1 Disk Space Required for DMS Environments

Each `dmsN.alpha` environment must have the following software subsets installed:

- Additional Networking Services (OSFINET)
- Dataless Management Services (OSFDMS)

Each `dmsN.alpha` environment also can contain additional software for the clients registered to access that environment. Section 11.2 describes how to install software in DMS environments.

In addition to space needed for the mandatory subsets and the subsets required by DMS reserve the following space:

- Enough space for any layered products, such as DECnet/OSI that you plan to install at any time in the future
- An additional 10 percent of the required disk space to allow for file system administration tasks and file system information

Appendix B contains worksheets for calculating the amount of space you need for a single DMS environment. Refer to the first worksheet as you read the following example calculation.

Caution

Subset sizes in this example are for illustration only. The actual sizes for standard operating system subsets are listed in the *Installation Guide*.

To determine the names of the subsets you want to install, refer to the descriptions also listed in the *Installation Guide*.

Subset size information for layered products is included in the products' installation documentation.

Assume that you want to install all of the mandatory and optional subsets plus one layered product. You need at least one DMS environment, `/var/adm/dms/dmsN.alpha`. You refer to the appropriate documentation and find that you want the following subsets:

Table 10–1: Estimated Version 4.0F Subset Sizes for DMS

Subsets	Size in Mb
Mandatory subsets	250
All optional subsets	400
One layered product subset	50
	—
SUBTOTAL	700
10 percent additional space for overhead	70
	—
TOTAL	770

The subset sizes add up to 700 Mb. Allowing another 10 percent of this space (70 Mb) for file system administration and information, you arrive at a total size of 770 Mb for the `/var/adm/dms/dmsN.alpha` environment.

Reserve additional space for any other software products you plan to install later. These products' space requirements must be factored into the 10 percent overhead allocation.

10.6.2 Estimating Disk Space for Clients

You must reserve disk space in the `/clients` file system on the server for clients' `root` areas. The amount of disk space required depends upon the type of kernel build you choose for the client.

Refer to the second DMS worksheet in Appendix B to calculate the amount of space needed for a `/clients` area.

10.6.3 Types of Kernel Builds

When you are adding clients to a DMS environment, you have the option to choose: no build, full build, or partial build kernel support. When determining the amount of space required by a client, you must keep in mind the type of build support you choose for the client.

Clients' volatile files, such as those in the `/tmp`, `/var/spool`, `/var/sys`, and `/var/adm` directories are located in the individual client's `root` area. The client's `root` area requires a minimum of 40 Mb of disk space. Use the following guidelines for estimating disk space requirements, in addition to the 30 Mb minimum required by the client:

- No build support

Caution

This type of kernel build is not recommended for DMS clients running Version 3.2C or higher of the operating system.

Providing no build area means that the clients cannot build kernels and must run the Generic `DATALESS` kernel supplied by the system administrator. No build support is available only when the server and client are on the same version of the operating system. Additionally, no build support kernel build type does not allow the client to build a customized kernel. If you choose no build support, you do not need to allow for extra disk space other than the required minimum 30 Mb.

- Full build support

A full build area creates an entire `/sys` area for the client and consumes the most disk space. You should select this option if the client modifies kernel objects and performs kernel builds. If you choose a full build, allow an additional 100 Mb for each client's `root` area.

- Partial build support - Default for clients running Version 3.2C or higher of the operating system

A partial build area creates a build area that contains only configuration data. All kernel objects are obtained from the server. You should select this type of build if the client performs kernel builds but does not modify kernel objects. If you choose a partial build, allow an additional 15 Mb for each client's `root` area.

The space required by individual clients will not be the same, but you can add all the needed spaces together to arrive at the total requirement for the `/clients` area. You must also remember to reserve additional space for clients that add files to their `root` areas.

10.7 Installing the Operating System on the DMS Server

The *Installation Guide* describes how to install the operating system on the server. It is recommended that you perform a custom installation when installing software on the server because during a custom installation you have the opportunity to choose the disks and partitions on which to install the software. The *Installation Guide* contains lists of all the standard operating system software sets, both supported and unsupported, with subset names, sizes, and descriptions of subset contents. You need this information to install the operating system itself as well as to install DMS.

The following optional software subsets must be installed on the server to successfully use the DMS utilities to set up a DMS environment:

- Additional Networking Services (OSFINET)
- Dataless Management Services (OSFDMS)

To install these software subsets, you can follow either one of these steps:

- Perform a custom installation and choose the subsets listed previously along with the other subsets you choose to install.
- Perform a default installation and then, after the installation is complete, use the `setld` utility to install the subsets listed previously and any additional software subsets.

For information about using the `setld` utility to load software subsets, refer to the *Installation Guide* or `setld`.

10.8 DMS Client Registration

Before you can use DMS to serve a client, you must register the client with a network naming service and with the DMS server. You must perform the following tasks to prepare to register clients:

1. Obtain information about each client.
2. Fill out a copy of the DMS Client Setup Worksheet in Appendix B for each client.
3. Register each client's host name and IP (Internet Protocol) address with the appropriate naming service, using the NIS or BIND Configuration Application or by placing an entry for the client in the server's `/etc/hosts` file.

10.8.1 Obtaining Information About Each DMS Client

You need to know the following information about each processor you plan to add as a client to a `/var/adm/dms/dmsN.alpha` environment and to register the client with the appropriate naming service:

- The host name
Only lowercase letters (a-z) and numbers are permitted in host names. The host name must begin with a letter.
- The DMS environment and client areas to which you want to register the client
- The client's network interface type, subnet mask and gateway address for this network interface
The gateway address is required when the server and client are on different networks.
See the *Network Administration* guide for information about network interfaces, subnet masks and route for network.
- The client's Ethernet or FDDI hardware address
See the *Network Programmer's Guide* or Section 6.2 for information about how to obtain hardware addresses.
- The swap device and partition and swap device drive type (swapping is done on the client's local disk)
Refer to the *Installation Guide* for guidelines on planning swap space on the client's local disk. However, keep in mind that because the `/usr` file system is not on the client's local disk, you have much more space on the client to allocate for swap space.

- The type of kernel build to be supported (full, partial, or none). Refer to Section 10.6.3 for a description of the types of kernel build support for the client.

10.8.2 Registering Clients' Host Names and IP Addresses with DMS Servers

If the host system is served by any of the following naming services, check with your site administrator to be sure that your clients are registered with the appropriate naming service servers:

- The server's `/etc/hosts` file
- Berkeley Internet Name Domain (BIND)
- Network Information Services (NIS)

By using the Network Configuration Application, you can place each client processor's host name and IP (Internet Protocol) address in the `/etc/hosts` file when you initially set up your LAN. The Network Configuration Application utility is described in the *Network Administration* guide.

You also can place the host name and IP address in the `/etc/hosts` file by using a text editor such as `vi`. The host name and IP address for each client processor must be unique.

See the *Network Administration* guide for information about setting up NIS and the BIND Configuration Application.

10.9 Security Considerations

C2 security may be installed on the server and the clients. However, Dataless Management Services uses the `bootp` protocol, which is not a secure protocol. Therefore, your dataless environments may not be secure.

11

Creating DMS Environments on the DMS Server

This chapter describes how to use the `dmu` utility to add software to a DMS environment and how to configure the environment. The information in this chapter describes how to:

- Install software into a new DMS environment
- Add software into an existing DMS environment
- Customize and configure a DMS environment
- Install a hardware update release
- Configure a DMS environment
- Set up a worldwide DMS server

11.1 Compatibility Between the DMS Server and the DMS Client

If you are installing Tru64 UNIX Version 4.0F or higher into a DMS environment and the DMS server is running a previous version of the operating system, you must perform the following procedure as superuser on the DMS server:

1. If your distribution media is CD-ROM, enter a `mount` command similar to the following:

```
# mount -rd /dev/rz4c/mnt
```

This example uses a CD-ROM drive that is unit 4 and specifies `/mnt` as the mount point; if your drive is a different unit, substitute the device special file name for that unit. If you are uncertain of your CD-ROM's unit number, use the `file` command, specifying the raw device, as follows:

```
# file /dev/rrz*c
/dev/rrz1c: char special (8/1026) SCSI #0 RZ25 disk #8 (SCSI ID #1)
/dev/rrz2c: char special (8/2050) SCSI #0 RZ25 disk #16 (SCSI ID #2)
/dev/rrz3c: char special (8/3074) SCSI #0 RZ25 disk #32 (SCSI ID #3)
/dev/rrz4c: char special (8/4098) SCSI #0 RRD43 disk #64 (SCSI ID #4)
```

The CD-ROM device corresponds to an RRD device, in this example RRD43.

2. To update DMS on the server, assuming the distribution media is mounted at `/mnt`, enter the following:

```
# /mnt/isl/utilupdate -d -m /mnt
```

- In this example, the `-d` copies several files from the distribution CD to the server's `/usr/sbin` directory. This ensures DMU compatibility with the operating system.
- The `-m` *directory* is the mount point of the distribution media. In this example, *directory* is `/mnt`, and is a required parameter.

This command copies any files in `/usr/sbin` that would be overwritten to files with a `*.pre-V4.0F` suffix, for example: `/usr/sbin/setld` is copied to `/usr/sbin/setld.pre-V4.0F`.

When the `utilupdate` script completes, this RIS server can serve a DMU client. Appendix C describes the `utilupdate` utility.

If the utility finds existing `*.pre-V` operating system files on your system, no copies are made. If the server is already running the current version of the operating system (or higher), a confirmation is displayed and no copies are made.

11.2 Installing Software in a New DMS Environment

You must install and configure all the software you plan to use in a DMS environment before you can add clients to share the environment.

Perform the procedures described in this section to install the software into a new `dmsN.alpha` environment. Repeat the installation procedures for each `dmsN.alpha` environment you plan to set up.

1. Insert the operating system distribution CD-ROM into the drive, then execute a command similar to the following to mount the CD-ROM:

```
# mount -rd /dev/rz4c /mnt
```

This example mounts a CD-ROM drive that is device 0 on the mount point `/mnt`. If your drive is a different device, substitute the correct device name. The mount point does not have to be `/mnt`.

If you are uncertain of your CD-ROM drive's unit number, use the `file` command as follows:

```
# file /dev/rrz*c
/dev/rrz1c: char special (8/1026) SCSI #0 RZ25 disk #8 (SCSI ID #1)
/dev/rrz2c: char special (8/2050) SCSI #0 RZ25 disk #16 (SCSI ID #2)
/dev/rrz3c: char special (8/3074) SCSI #0 RZ25 disk #24 (SCSI ID #3)
/dev/rrz4c: char special (8/4098) SCSI #0 RZ25 disk #32 (SCSI ID #4)
#
```

Note

Additionally, you can use a Network File System (NFS) mount point to install software from a Remote Installation Services (RIS) area or operating system distribution CD-ROM from another processor. See Section 4.4 for more information about using an NFS mounted RIS area.

2. Invoke the `dmu` utility by entering the following command at the root system prompt:

```
# /usr/sbin/dmu
```

The DMU Main Menu is displayed:

```
*** DMU Main Menu ***
```

Choices without key letters are not available.

```
    ) ADD a client
    ) CONFIGURE software environments
    ) DELETE software environments
i)  INSTALL software environments
    ) LIST registered clients
    ) MODIFY a client
    ) REMOVE a client
    ) SHOW software environments
x)  EXIT
```

If this is the first time you have accessed `dmu`, there are no DMS software environments installed. The only option you have is to install software into an environment or to exit from the utility.

3. Choose the `INSTALL` software environments option by entering `i` at the prompt.

```
Enter your choice: i
```

4. The `INSTALL` software environments option displays an installation menu which lists the installation options that are available. Choose option 1, Install software into a new area:

```
DMU Software Installation Menu:
```

- 1) Install software into a new area
- 2) Add software to an existing area
- 3) Perform configuration phase on an existing area
- 4) Return to previous menu

Enter your choice: 1

You have chosen to establish a new remote dataless environment.

5. A prompt asks for the full pathname of the device special file name or the path of the directory where the software is located.

Enter the device special file name or the path of the directory where the software is located (for example, /mnt/ALPHA/BASE):

/mnt/ALPHA/BASE

6. The dmuf utility lists the mandatory software subsets that are installed automatically (the mandatory subsets displayed vary depending upon the type of hardware you are using):

*** Enter subset selections ***

The following subsets are mandatory and will be extracted automatically unless you choose to exit without extracting any subsets:

- * Base System
- * Base System - Hardware Support
- * Java V1.1.5 Environment
- * Tcl Commands
- * Tk Toolkit Commands
- * Hardware Kernel Header and Common Files
- * Hardware Kernel Modules
- * Kernel Header and Common Files
- * Standard Kernel Modules
- * CDE Mail Interface
- * Basic Networking Services
- * NFS(tm) Utilities
- * Local Printer Support
- * Compiler Back End
- * Base System Management Applications and Utilities
- * Basic Networking Configuration Applications
- * Graphical Base System Management Utilities
- * Graphical Print Configuration Application
- * Graphical System Administration Utilities
- * NFS(tm) Configuration Application
- * Basic X Environment
- * CDE Desktop Environment
- * CDE Minimum Runtime Environment
- * Old X Environment
- * Netscape Navigator Gold V3.0

7. The system then displays the first screen of optional software subsets. The optional subsets displayed vary depending upon the type of hardware you are using. At each screen of subsets you can enter the number that corresponds to the subset you want or you can press the Return key to display the next screen of subsets. At the bottom of each subset screen, you will see the following prompt:

---MORE TO FOLLOW---

Enter your choices or press RETURN to display the next screen.

The utility is flexible; it lets you enter your subset selections at the bottom of each screen or all at once at the end of the subset list (which may be several screens later).

You can enter subset numbers separately (separated by a space) or in ranges (with a hyphen between the first number in the range and the last number in the range).

The following subsets must be installed in the DMS environment:

- Additional Networking Services
- Dataless Management Services

The first screen of optional subsets is displayed along with the following instructions:

The subsets listed below are optional:

There may be more optional subsets than can be presented on a single screen. If this is the case, you can choose subsets screen by screen or all at once on the last screen. All of the choices you make will be collected for your confirmation before any subsets are extracted.

- General Applications :
 - 1) Additional Terminfo databases

--- MORE TO FOLLOW ---

Enter your choices or press RETURN to display the next screen.

Choices (for example, 1 2 4-6):

- 2) Computer Aided System Tutor
- 3) DOS tools
- 4) Local Area Transport (LAT)
- 5) Perl Runtime
- 6) UNIX(tm) SVID2 Compatibility
- 7) UNIX(tm) to UNIX(tm) Copy Facility
- 8) Xemacs Runtime

- Kernel Build Environment :
 - 9) ATM Kernel Header and Common Files
 - 10) ATM Kernel Modules
 - 11) Logical Storage Manager Kernel Modules
 - 12) POLYCTR advfs Kernel Modules

- Kernel Software Development :
 - 13) ATM Kernel Objects
 - 14) Hardware Kernel Objects
 - 15) POLYCTR advfs Kernel Objects
 - 16) Standard Kernel Objects

- Mail Applications :
 - 17) DECwindows Mail Interface
 - 18) RAND Corp. Mail Handler (MH)

- Network-Server/Communications :
 - 19) ATM Commands
 - 20) Additional Networking Services
 - 21) Dataless Management Services
 - 22) Remote Installation Service

- Obsolete Components :
 - 23) Obsolete Commands and Utilities
 - 24) Obsolete Locale databases

- Printing Environment :
 - 25) Adobe Font Metric Files

--- MORE TO FOLLOW ---

Enter your choices or press RETURN to display the next screen.

Choices (for example, 1 2 4-6):

- Reference Pages :
 - 26) Ref Pages: Admin/User
 - 27) Ref Pages: CDE Admin/User
 - 28) Ref Pages: CDE Development
 - 29) Ref Pages: Programming
 - 30) Ref Pages: Windows Admin/User
 - 31) Ref Pages: Windows Programming
- Software Development :
 - 32) CDA(tm) Software Development
 - 33) CDA(tm) for X/Motif Development
 - 34) CDE Software Development and Programming Examples
 - 35) DMI Software Development and Programming Examples
 - 36) GNU Revision Control System
 - 37) Java V1.1.5 Development Environment
 - 38) Ladebug Debugger Version 4.0-44
 - 39) Ladebug Debugger Version 4.0-44 Release Notes
 - 40) Ladebug Debugger graphical user interface
 - 41) Ladebug Debugger remote server
 - 42) Programming Examples
 - 43) Software Development Desktop Environment
 - 44) Software Development Tools and Utilities
 - 45) Source Code Control System
 - 46) Standard Header Files
 - 47) Standard Programmer Commands
 - 48) Static Libraries
 - 49) X Window and X/Motif Header Files
 - 50) X Window and X/Motif Programming Examples
 - 51) X Window and X/Motif Software Development
 - 52) X Window and X/Motif Static Libraries
- Supplemental Documentation :
 - 53) Java V1.1.5
 - 54) XIE Version 5 Online Documentation
- System Administration :
 - 55) Advanced File System Daemon

--- MORE TO FOLLOW ---

Enter your choices or press RETURN to display the next screen.

Choices (for example, 1 2 4-6):

- 56) Advanced File System Graphical User Interface
- 57) C2-Security
- 58) C2-Security GUI
- 59) DECEvent Base kit (Translation / Analysis)
- 60) DMI Runtime Environment
- 61) Environmental Monitoring
- 62) Kernel Debugging Tools
- 63) Logical Storage Manager


```

64) Logical Storage Manager GUI
65) POLYCTR advfs
66) Single-Byte European Locales
67) System Accounting Utilities
68) System Exercisers

- Text Processing :
69) Doc. Preparation Tools
70) Doc. Preparation Tools Extensions

- Windowing Environment :
71) Adobe Fonts
72) DECwindows 100dpi Fonts
73) DECwindows 75dpi Fonts
74) LK201 Keyboard Support
75) LK401 Keyboard Support
76) LK411 Keyboard Support
77) LK421 Keyboard Support
78) LK444 Keyboard Support
79) PCXAL Keyboard Support
80) X Customizations for OEM
81) X Fonts
82) X Servers Base
83) X Servers for Open3D
84) X Servers for PCbus
85) X Servers for TurboChannel
86) X/Motif 1.1

- Windows Applications :
87) Additional DECwindows Applications

--- MORE TO FOLLOW ---
Enter your choices or press RETURN to display the next screen.
```

Choices (for example, 1 2 4-6):

```

88) Additional X Applications
89) CDE Additional Applications
90) Demo X Applications
91) Nested X Server
92) Old Additional DECwindows Applications
93) Virtual X Frame Buffer
```

Or you may choose one of the following options:

```

94) ALL mandatory and all optional subsets
95) MANDATORY subsets only
96) CANCEL selections and redisplay menus
97) EXIT without extracting any subsets
```

Enter your choices or press RETURN to redisplay menus.

Choices (for example, 1 2 4-6): **95**

If you choose the option ALL mandatory and all optional subsets, all available software subsets are installed.

If you choose the option MANDATORY subsets only, only the mandatory software subsets are installed in the environment even if you have entered optional subset numbers on previous screens. If you choose this option, you must go back and install the subsets required

for DMS from the optional subset list. Use the instructions in Section 11.3 of this manual to install the subsets required for DMS.

If you choose the option CANCEL selections and redisplay menus, the utility returns to the first screen of software subsets and you are able to start your subset selection process again.

If you choose the option EXIT without installing any subsets, the utility prompts you to confirm your choice. If you enter y, the utility returns to the DMU Main Menu. If you enter n, the utility returns to the first screen of software subsets to let you begin your subset selection again.

8. Once you have entered your subset selections, the screen displays the subsets you have chosen to install and then asks you to confirm your choice:

```
You are extracting the following mandatory subsets:
```

```
Base System
Base System - Hardware Support
Java V1.1.5 Environment
Tcl Commands
Tk Toolkit Commands
Hardware Kernel Header and Common Files
Hardware Kernel Modules
Kernel Header and Common Files
Standard Kernel Modules
CDE Mail Interface
Basic Networking Services
NFS(tm) Utilities
Local Printer Support
Compiler Back End
Base System Management Applications and Utilities
Basic Networking Configuration Applications
Graphical Base System Management Utilities
Graphical Print Configuration Application
Graphical System Administration Utilities
NFS(tm) Configuration Application
Basic X Environment
CDE Desktop Environment
CDE Minimum Runtime Environment
Old X Environment
Netscape Navigator Gold V3.0
```

```
Is this correct? (y/n): y
```

If the subsets listed are the subsets that you want to install into the environment, enter y. If you type N, the list of optional software subsets is displayed again, and you can restart your subset selection process.

9. Before software installation begins, the dmdu utility checks to make sure there is enough disk space to accommodate the software subsets you have chosen to install in the environment. The following message appears if there is sufficient disk space available:

```
Checking file system space required to install selected
subsets:
```

File system space checked OK.

If there is not enough disk space to perform the installation, a message similar to this is displayed:

```
fitset:
file system /usr needs 74683 Kbytes more to install the software specified.
setld:
There is not enough file system space to install the mandatory subsets.
setld failed.
```

Error(s) have occurred during subset load. The subset(s) that failed are listed above and have not been installed into the environment. Possible causes for failure include subset dependencies that have not been met or the lack of disk space.

You will now be asked if you wish to keep this environment. If you elect to keep the environment, you may install the subsets that failed by choosing INSTALL from the DMS main menu and select an existing environment. If you elect not to keep the environment, it will be completely removed.

Keep this environment (y/n) [y]:

If you want to keep the new DMU environment, enter *y*. If not, enter *n*. The *dmu* utility terminates the installation and returns to the DMU Main Menu. At this point, you have to resize your disk partitions or choose fewer optional software subsets.

10. If there was enough disk space to install the subsets, messages will appear as each subset is selected, installed, and verified. Depending on the number of and size of the subsets you have chosen, this process can take an hour or more.

The new environment is located in `/var/adm/dms/dmsN.alpha`.

After the installation of software subsets is complete, the utility displays the name of the new DMS environment. If this is the first DMS environment, it is automatically named `dms0.alpha`. Subsequent DMS environments are numbered sequentially. That is, the next environment is named `dms1.alpha`, the one after that is named `dms2.alpha`, and so on.

If you delete an environment, for example `dms4.alpha`, the next time you install a DMS environment, the *dmu* utility reuses the number 4 to name the environment. The utility fills the holes left in the numbering sequence by environments that have been deleted.

After you install software into the DMS environments, you must configure and build the kernel for that environment. Refer to Section 11.5 for instructions on how to begin the kernel configuration phase. However, if you want to add additional software to the environment before configuring the kernel, refer to Section 11.3.

11.3 Adding Software to an Existing DMS Environment

Use the `setld` utility to install any additional software subsets and layered products that are compatible with the operating system into the DMS client area on the server. To install additional software into an existing environment, invoke the `dmu` utility and choose the `INSTALL` software environments option from the DMU Main Menu.

Caution

Ensure that DMS clients that mount the `usr` area of the target `/var/adm/dms/dmsN.alpha` area are not running when you install an additional software product, or their `usr` area may change unpredictably and cause destruction of software or data or both.

It is recommended that you shut down the clients registered to the environment (using `shutdown`) before adding new software. To provide clients access to the new software subsets, delete the clients from the environment and then add them to the environment after it is reconfigured.

When clients are removed and added to the reconfigured environment, customized information in the `root` directory is lost.

The following sample session illustrates the installation of optional subsets into `/var/adm/dms/dms0.alpha`.

1. Mount the CD-ROM that contains the software you want to install as shown in Section 11.2, or mount the file system area that contains the software kits.
2. Invoke the `dmu` utility from the root system prompt by entering:

```
# /usr/sbin/dmu
```

Choose the `INSTALL` software environments option from the DMU Main Menu by entering `i` at the prompt.

```
*** DMU Main Menu ***
```

```
a) ADD a client
c) CONFIGURE software environments
d) DELETE software environments
i) INSTALL software environments
```

```
) LIST registered clients
) MODIFY a client
) REMOVE a client
s) SHOW software environments
x) EXIT
```

Enter your choice: i

3. The DMU Software Installation Menu is displayed. Choose the option, Add software into an existing area. A message confirms that you have chosen to add a product to an existing area.

DMU Software Installation Menu:

```
1) Install software into a new area
2) Add software into an existing area
3) Perform configuration phase on an existing area
4) Return to previous menu
```

Enter your choice: 2

You have chosen to add a product to an existing environment.

The existing environment is /var/adm/dms/dms0.alpha.

In the previous example, only one environment, dms0.alpha, exists. If you have more than one DMS environment, a list of the environments is displayed and a prompt asks you to select the environment to which you want to add software:

Select the remote dataless environment:

```
1) /var/adm/dms/dms0.alpha
   'DIGITAL UNIX Operating System (Rev nnn)'
```

```
2) /var/adm/dms/dms1.alpha
   'DIGITAL UNIX Operating System (Rev nnn)'
```

```
   'Sort Runtime Library'
```

Enter your choice: 1

4. Next, a prompt asks for the full pathname of the device special file name or the path of the directory where the software is located:

```
Enter the device special file name or the path of the directory where
the software is located (for example, /mnt/ALPHA/BASE):
/mnt/ALPHA/COMPILERS
```

5. As shown in Section 11.2 the utility lists the subsets that are available. Select the optional subsets that you want from the list. Subsets that are already installed will not display on the list.
6. The utility lists the subsets that you have chosen to install and asks you to confirm your choice. If the subsets listed are the ones that you want, enter y. If you enter N, the list of optional software subsets is displayed again, and you can reselect the subsets that you want.

Messages appear as each subset that you selected is installed and verified. Depending on the number and size of subsets you have chosen, this process can take an hour or more.

11.4 Installing a Hardware Update Release into a DMS Environment

The procedures in this section assume that the client is running a version of the operating system that is supported.

You can install the new release from a locally mounted CD-ROM, a CD-ROM mounted using NFS from a remote server, or from a RIS area exported using NFS from a RIS server where the new release has been installed. See Section 4.4 for additional information on using this procedure.

If you install from a RIS area, you must know which product areas in your `/usr/var/adm/ris/risN.alpha` contain each of the product kits you need to install. On the RIS server, as superuser, enter the following command to identify the RIS area that contains the release subsets:

```
# /usr/sbin/ris -s
```

If you install from an NFS mounted RIS area or from a locally installed RIS area, examine the `/usr/var/adm/ris/risN.alpha/ProdNames` file to determine which directory in the RIS area contains the operating system software and enter the path of the directory when requested by the system.

If you install from a CD-ROM mounted on the mount point `/mnt`, the directory that contains the operating system hardware update is `/mnt/ALPHA/hUPDATE`.

To install the operating system hardware update release, perform the following procedures:

1. Install the operating system into a new DMS environment using the steps in Section 11.2. Do not configure the DMS environment.
2. Install the operating system hardware update release into the same environment following the steps in Section 11.3.

After you install the operating system and add the operating system hardware update, you can configure your DMS environment.

Follow the steps in Section 11.5 to configure your DMS environment.

11.5 Configuring DMS Environments

After you install software into a new or existing DMS environment, you must configure the environment. Configuring the environment entails:

1. Customizing system files (the `.proto..` files). This step is optional; you do not have to customize these files for the environment. This step is performed outside of the `dmu` utility.
2. Building the environment's kernel. This step is mandatory and is performed through the `CONFIGURE software environments` option of the DMU Main Menu.

11.5.1 Customizing `.proto..` Files

If you have already configured the DMS environment and later decide to modify `.proto..` files, you must delete the files created by the configuration process. In the following example the `fstab` is modified to include a server name:

1. delete the `$DMS_ROOT/hosts` file
2. modify the `$DMS_ROOT/.proto..hosts` file
3. configure the DMS area

Customize each environment to suit the clients that will be added to a DMS environment by modifying the `.proto..` files. Performing this customization before you add clients to the environment reduces the amount of customization required at each client. You perform the customization before configuring and building the kernel.

There are many `.proto..` files located in the DMS environment `/var/adm/dms/dmsN.alpha` in the `/etc`, `/bin`, `/var/adm/X11`, and `root` directories that you may want to modify. As an example, the `/etc/.proto..hosts` file is a file that you might want to modify in advance. Table 11-1 lists the `.proto..` files found in the `/etc` directory that are available for you to customize.

Table 11-1: List of `.proto..` Files in `/etc`

<code>.proto..TIMEZONE</code>	<code>.proto..acucap</code>	<code>.proto..autopush.conf</code>
<code>.proto..binlog.conf</code>	<code>.proto..ddr.db</code>	<code>.proto..ddr.dbase</code>
<code>.proto..dhcptab</code>	<code>.proto..disktab</code>	<code>.proto..dvrdevtab</code>
<code>.proto..exports</code>	<code>.proto..fstab</code>	<code>.proto..ftpusers</code>
<code>.proto..gen_databases</code>	<code>.proto..gettydefs</code>	<code>.proto..group</code>

Table 11–1: List of .proto.. Files in /etc (cont.)

.proto..hosts	.proto..hosts.equiv	.proto..ifaccess.conf
.proto..inet.local	.proto..inetd.conf	.proto..inittab
.proto..lprsetup.dat	.proto..magic	.proto..motd
.proto..networks	.proto..ntp.conf	.proto..passwd
.proto..phones	.proto..profile	.proto..protocols
.proto..rc.config	.proto..remote	.proto..rpc
.proto..securettys	.proto..services	.proto..shells
.proto..slhosts	.proto..stresetup.conf	.proto..svc.conf
.proto..sysconfigtab	.proto..syslog.conf	.proto..ultrix_login
.proto..ultrix_path	.proto..ultrix_profile	

For example, the `/etc/.proto..hosts` file contains no host names. At a minimum, edit this file to include the network addresses, names, and aliases of well-known systems in your environment. Server information should be listed, so that you do not have to enter this information for each client when setting up the network services. Entries in this file look similar to the following:

```
127.0.0.1 localhost
61.96.112.102 dmsserver.myorg.com dmsserver
61.96.112.157 nfsserver.myorg.com nfsserver
```

You should list commonly mounted NFS file systems, as well as the `/proc` file system if the clients will be using it. When you add NFS file systems to the `etc/.proto..fstab` file you also should add the hosts to the `etc/.proto..hosts` file. If the NFS mount points are in the client `root` partition, make the directory mount points in the DMS `root` area as well. If they are in the shared `usr` directory structure, make the directory mount points in the DMS `usr` directory area.

After you have made changes to the `.proto..` files in the DMS environment, perform the configuration phase following the steps in Section 11.5.2.

11.5.2 Configuring the DMS Environment

After you have modified the `.proto..` files, use the following procedures to configure the DMS environment:

1. Invoke the `dmu` utility by entering the following command at the root system prompt:


```
# /usr/sbin/dmu
```

Choose the option `CONFIGURE` software environments by entering `c` at the DMU Main Menu prompt. If you want to customize the environment, you already should have modified the `.proto..` files.

```
*** DMU Main Menu ***
```

```
) ADD a client
c) CONFIGURE software environments
d) DELETE software environments
i) INSTALL software environments
  ) LIST registered clients
  ) MODIFY a client
  ) REMOVE a client
s) SHOW software environments
x) EXIT
```

```
Enter your choice: c
```

```
You have chosen to configure an existing dataless
environment.
```

Note

You also can configure the DMS environment from the `INSTALL` software environments option on the DMU Main Menu (by entering `i` at the Main Menu prompt). When you enter `i`, the DMU Software Installation Menu is displayed. As shown in this example, the configuration phase is performed by choosing option 3.

```
DMU Software Installation Menu:
```

```
1) Install software into a new area
2) Add software to an existing area
3) Perform configuration phase on an existing area
4) Return to previous menu
```

```
Enter your choice: 3
```

The configuration phase proceeds as shown in the following steps.

2. You are prompted to select the dataless environment that you want to configure:

```
Select the remote dataless environment:
```

```
1) /var/adm/dms/dms0.alpha
'DIGITAL UNIX V.4.0F Operating System (Rev nnn)'
```

```
2) /var/adm/dms/dms1.alpha
'DIGITAL UNIX V.4.0F Operating System (Rev nnn)'  
'DEC Pascal for DEC OSF/1 AXP Runtime Support'  
'DEC Fortran for OSF/1 AXP Runtime Support'  
'DEC Cobol RTL V2.2 for DEC OSF/1 Systems'  
'DEC C++ RTL Version 3.0 for DEC OSF/1 SYSTEMS'
```

Enter your choice: 1

If there is only one environment with software installed, you will not be prompted to enter the environment to configure. The utility proceeds to the next step automatically.

- 3. The utility displays a message that informs you that if you want to customize the environment, you must have modified already the .proto.. files within the DMS environment. If you have not modified already these files, you have a chance to stop the process now and modify the .proto.. files.**

There are several files prefixed by .proto.. within the environment area that should be modified before performing a configuration of the area. Performing this customization of the environment before you register clients will reduce the amount of customization required at each client.

You may now choose to continue with the configuration or return to the main menu and exit to perform customization of the environment.

```
Do you want to (c)ontinue or (r)eturn to the main menu? (c/r)  
[c]: c
```

If you enter r, the utility returns to the DMU Main Menu to give you the opportunity to exit the dmU utility and modify the /etc/.proto.. files.

If you enter c to continue with the configuration, the utility displays messages as it configures each software subset. Your output will be similar to the following:

```
Configuring "Base System " (OSFBASE440)  
  
Configuring "Base System - Hardware Support " (OSFHWBASE440)  
  
Configuring "Compiler Back End " (OSFCMPLRS440)  
  
Configuring "Kernel Header and Common Files " (OSFBINCOM440)  
  
Configuring "Standard Kernel Objects " (OSFBIN440)  
  
Configuring "Hardware Kernel Objects " (OSFHWBIN440)  
  
Configuring "Hardware Kernel Header and Common Files"  
(OSFHWBINCOM440)
```

Configuring "Logical Storage Manager Kernel Header and Common Files" (OSFLSMBINCOM440)

Configuring "Basic Networking Services " (OSFCLINET440)

Configuring "X Servers " (OSFSER440)

Configuring "Basic X Environment " (OSFX11440)

Configuring "X Fonts " (OSFMITFONT440)

Configuring "DECwindows 75dpi Fonts " (OSFFONT440)

Configuring "DECwindows 100dpi Fonts " (OSFFONT15440)

Configuring "Adobe Fonts " (OSFDPSFONT440)

Configuring "Additional Networking Services " (OSFINET440)

Configuring "NFS(tm) Utilities " (OSFNFS440)

Configuring "POLYCTR advfs Kernel Objects " (OSFADVFSBIN440)

Configuring "Logical Storage Manager Kernel Objects" (OSFLSMBIN440)

Configuring "Remote Installation Service " (OSFRIS440)

Configuring "Dataless Management Services " (OSFDMS440)

After you have created and installed software in at least one DMS environment, performed customization of the `.proto.` files, and performed the configuration phase on the DMS environment, you can add clients to the environment. Adding clients to DMS environments is discussed in Chapter 12.

11.6 Setting Up a Worldwide DMS Server

The following sections provide information for setting up a worldwide DMS server.

11.6.1 DMS Server Setup

Use the following procedures to create a new `dmsN.alpha` environment and install worldwide software into it:

1. Install the operating system into a DMS area before installing the Worldwide Language Support (WLS) software.

2. Enter a `mount` command similar to the following before starting the utility if you are using the operating system CD-ROM as the distribution media:

```
# mount -dr /dev/rz4c /mnt
```

This example uses a CD-ROM drive that is unit 0 on the mount point `/mnt`. If your drive is a different unit, substitute the correct unit number.

3. Enter the following command to invoke the `dmu` utility:

```
# /usr/sbin/dmu
```

4. Choose the option `INSTALL software environments` by entering `i` at the DMS Main Menu prompt.
5. The DMU Software Installation Menu is displayed. Choose the option, `Add software to an existing area`. If you have more than one DMS environment, a list of the environments is displayed and a prompt asks you to select the environment to which you want to add software. Select the DMS area on which the operating system is installed.
6. At the prompt enter the full pathnames of the device special file or mount points for the distribution media. Enter `/mnt/ALPHA/WORLDWIDE` to install worldwide support subsets.

The installation procedure then displays:

```

*****
*
*   Tru64 UNIX WORLDWIDE LANGUAGE SUPPORT INSTALLATION PROCEDURE   *
*
*****

```

Please select the countries for which you want to install support subsets:

- | | |
|-----------------------|------------------------------------|
| 1) Czech Republic | 2) France |
| 3) Germany | 4) Greece |
| 5) Hong Kong | 6) Hungary |
| 7) Israel | 8) Italy |
| 9) Japan | 10) Korea |
| 11) Lithuania | 12) Poland |
| 13) Russia | 14) Slovakia |
| 15) Slovenia | 16) Spain |
| 17) Sweden | 18) Taiwan |
| 19) Thailand | 20) The People's Republic of China |
| 21) Turkey | |
| 22) All of the above | |
| 23) None of the above | |

Choices (for example, 1 2 3) :

7. Select the countries for which you want to install worldwide software. A list of subsets is displayed. Worldwide subsets are described in the *Installation Guide*. The steps for installing subsets are the same as installing subsets from a RIS server. See Section 4.1 for detailed instructions. After installing the subsets, the DMU Main Menu is displayed.
8. Choose the option `CONFIGURE` software environments by entering `c` at the DMU Main Menu prompt, to configure newly installed subsets into the DMS environment. Questions about configuring `Wnn` appear during the configuration phase.

11.6.2 Worldwide Client Setup

Once you have set up the DMS areas and registered the clients, they can access the configured areas. See Section 10.8 on how to register the client with a network naming service. You must register the client with the full or partial(default) kernel option for them to use the Asian kernel functionality.

11.6.3 Building an Asian Kernel for DMS Clients

When the DMS client boots for the first time from a newly configured DMS area, an Asian kernel is built. Reboot the system if you want to use the Asian terminal driver functions. You also can reconfigure the Asian kernel on the client machine by using the `wwconfig` command as follows:

```
# wwconfig -a
```

Refer to the `wwconfig(8)` reference page and the *Installation Guide* for more information about the `wwconfig` command.

12

Managing DMS Clients and Environments

This chapter describes how to use the `dmu` utility to manage Dataless Management Services (DMS) environments and clients. The information in this chapter describes how to:

- Locate and interpret the DMS client database file
- Add a client to a DMS environment
- Boot a DMS client
- Delete a DMS environment
- Modify a DMS client
- Remove a DMS client
- List registered DMS clients
- Show software environments in the server's DMS area
- Maintain the server's DMS areas

12.1 DMS Client Database File

The DMS client database file is located in `/var/adm/dms/clients/dmsdb`. Entries in this file are similar to the following:

```
client1:08-00-2b-30-96-68:/var/adm/dms/dms0.alpha:/clients/client1:  
dsk0b:RZ26:None:ln0:255.255.255.0
```

In this example:

- `client1` is the client's hostname
- `08-00-2b-30-96-68` is the client's hardware network address
- `/var/adm/dms/dms0.alpha` is the DMS environment being served to the client
- `/clients/client1` is the location of the client's root area
- `rz0b` is the client's swap device and partition
- `RZ26` is the swap disk

- None specifies the client has no kernel build area
- ln0 is the network interface type
- 255.255.255.0 is the subnet mask

When you use the `ADD` a client, `MODIFY` a client, or `REMOVE` a client option from the DMU Main Menu, the client's entry in the `dmsdb` file is respectively added, modified, or deleted.

12.2 Adding a DMS Client

The information you need to add a DMS client is shown in the Client Setup Worksheet in Appendix B. You should fill out a worksheet for each client you want to add before you use `dmu` to add clients to a DMS environment.

Before you can add a client, you already must have followed the procedures in Chapter 11 to install software in at least one DMS environment, and optionally customize the `.proto..` files.

The client system must be connected to a local area network (LAN) and must be registered with the server through one of the network naming services (see Section 10.8) or must have an entry in the server's `/etc/hosts` file.

When a client is added to a DMS environment, the `root` directory from the server's DMS environment gets copied to the client area.

Use the following procedure to add a client to a DMS environment:

1. Invoke the `dmu` utility by entering the following command at the `root` system prompt:

```
# /usr/sbin/dmu
```

2. Choose the `ADD` a client option by entering `a` at the DMU Main Menu prompt:

```
*** DMU Main Menu ***

a) ADD a client
c) CONFIGURE software environments
d) DELETE software environments
i) INSTALL software environments
l) LIST registered clients
m) MODIFY a client
r) REMOVE a client
s) SHOW software environments
x) EXIT
```

```
Enter your choice: a
```

3. The following confirmation message is displayed along with the information you are asked to provide about the client:

You have chosen to add a client for dataless service.

The following conditions must be met to add a client:

1. You must know the client processor's hostname.
2. The client's hostname must be in your system's host database(s).
3. You must know the client's interface type, subnet mask.
4. You must know the type of kernel build area.
5. You must know the swap device and partition on the client.
6. You must know the client's hardware Ethernet or FDDI address.
7. If the client and the server reside on different subnets, you will need the address of the gateway(s) that the client can use to communicate with the server.

Do you want to continue? (y/n) [y]:

If you enter n, the dmuf utility returns to the DMU Main Menu. If you enter y or press the Return key (to accept the default), the utility prompts you to enter the client's host name.

4. The following message is displayed when the server and client are on different networks. You must provide the gateway information needed for the client to connect to the server. RIS stores this information in the `/var/adm/ris/gateways` file. RIS displays the default network information if the gateway information is known.

The following are the known gateway[s] between the client subnet and server subnet. If these values[s] are not correct, please enter the proper addresses[s]. If these values are correct press Return. (For example, 16.69.144.???): **[16.69.144.199]**

Enter the client's route for network address as shown in the following example:

Enter the IP address of the gateway[s] between the client subnet and subnet: (For example, 16.69.144.???): **[16.69.144.199]**

5. Enter a host name that has an entry in the server system's host database by using the Network Information Service (NIS) or Berkeley Internet Name Domain (BIND) naming services or by making an entry in the server's `/etc/hosts` file.

Enter the client processor's hostname or press RETURN to quit:
client1

If you press the Return key, the utility returns to the DMU Main Menu. If you enter a host name that is not in the server's host database, the following message is displayed:

arp failed on hostname "client_name"

In the above message, arp is the address resolution protocol. If you receive this message, check the server's host database, the `/etc/hosts` file, to determine the correct client name. If the client

was never registered with a network naming service (such as BIND or NIS) or was never entered in the `/etc/hosts` file, exit the utility by pressing `Ctrl/C` and add the client to the `/etc/hosts` file.

Note

For the remaining examples, assume the Return key is pressed to accept the default response.

6. After you enter the client name, you are prompted to enter the location of the client's root directory. If you specify a path other than the default, which is `/clients/hostname`, you must have already created the directories in that path. The path you specify must begin with `/clients`. If you wanted to differentiate between client systems in different departments at your site, you could specify `/clients/department_name/hostname` as the location of root. The `department_name` directory must have been created already under the `/clients` directory for you to do this. A suggested maximum is 25 characters for the total path name for the client's root directory.

Enter the path to the client's root file system at the prompt:

```
Enter the path to contain the root file system. [/clients/client1]:
```

7. Next, the utility prompts you to enter the swap information for the client.

```
Enter the swap device and partition on client1. [disk0b]:  
Enter the swap device drive type for disk0b. [RZ26]:
```

8. The utility prompts you to enter some basic network information about the client. The `dmu` utility enters this information into the client's `rc.config` file to allow the client to boot over the network. You will be asked to enter the default route for network information if the server and client are on different networks. Refer to the *Network Administration* guide if you need more information about obtaining the client's network information:

```
Enter the network interface for client1 (16.69.199.157) [ln0]:
```

```
Enter the subnet mask for ln0. [255.255.255.0]:
```

```
Enter the default route for network 16.69.224 [16.69.144.199]:
```

If no entry for the client's subnet is found in the `/var/adm/dms/gateways` file on the server the following message is displayed:

```
Enter the IP address of the gateway[s] between the client subnet and  
server subnet. (For example, 16.69.144.???) . :
```

If an entry for the client's subnet is found in the `/var/adm/dms/gateways` file on the server the following message is displayed:

The following are the known gateway[s] between the client subnet and server subnet. If these value[s] are not correct, please enter the proper address[s]. If these value[s] are correct, press Return. (For example, 16.69.144.???)**[16.69.144.199]:**

Note

The default is `ln0`, which is appropriate for the DEC 3000 series and other systems that use the Lance Ethernet module. Some systems such as the EB64+ use the Tulip Ethernet module, which is identified as, for example, `tu0`. Be sure to enter the correct network device identifier for the Ethernet or FDDI interface on the client system.

9. The utility prompts you to enter the type of kernel build support you want to provide for the client. Refer to Section 10.6.3 for more information about kernel build support. If you are not sure what type of kernel build support you want, enter `H` for help.

Enter the type of kernel build area for client1.
You may select one of [F]ull, [P]artial, [N]one or
[H]elp for more information. [P]:

10. The following message confirms the choices you made:

You have specified the following configuration for client1:

```
      ROOT: /clients/client1
SWAP_DEVICE: /dev/rz0b
  SWAP_TYPE: RZ26
  BUILD_TYPE: Partial
  INTERFACE: ln0 (16.69.244.32)
SUBNET_MASK: 255.255.255.0
      ROUTE: network: 16.69.224 gateway: 16.69.144.199
Is this correct (y/n) [y]:
```

If you enter `n`, the utility returns to the DMU Main Menu and you will have to add your client information again. If you enter `y`, you are prompted to select the dataless environment to which you want to add the client. The directory `/clients/client1` is overwritten if it currently exists.

11. If there is only one `/var/adm/dms/dmsN.alpha` area, the following message is displayed:

The existing environment is `/var/adm/dms/dms0.alpha`.

The following environment will be installed from
`/var/adm/dms/dms0.alpha`:

Description

```
1 'DIGITAL UNIX 4.0F Operating System (Rev nnn)'
```

Is that correct? (y/n) [y]:

If there are multiple /var/adm/dms/dmsN .alpha areas, or if more than one dmsN .alpha environment is installed in this DMS server area, a list of the environments into which you can add the new client is displayed. As shown in the following example, each environment may contain different software subsets or may have been customized which may influence the environment you choose.

Select the remote dataless environment:

- 1) /var/adm/dms/dms0.alpha
'DIGITAL UNIX 4.0F Operating System (Rev nnn)'

- 2) /var/adm/dms/dms1.alpha
'DIGITAL UNIX 4.0F Operating System (Rev nnn)'
'DEC Pascal for DEC OSF/1 AXP Runtime Support'
'DEC Fortran for OSF/1 AXP Runtime Support'
'DEC Cobol RTL V2.2 for DEC OSF/1 Systems'
'DEC C++ RTL Version 3.0 for DEC OSF/1 SYSTEMS'

Enter your choice: 2

The following environment will be installed for the client from /var/adm/dms/dms1.alpha:

Description

```
'DIGITAL UNIX 4.0Fc Operating System (Rev nnn)'  
'DEC Pascal for DEC OSF/1 AXP Runtime Support'  
'DEC Fortran for OSF/1 AXP Runtime Support'  
'DEC Cobol RTL V2.2 for DEC OSF/1 Systems'  
'DEC C++ RTL Version 3.0 for DEC OSF/1 SYSTEMS'
```

Is that correct? (y/n) [y]:

12. If you enter `n`, the utility returns to the DMU Main Menu and the client is not added to any DMS environment. If you enter `y`, you are prompted to enter the client's Ethernet or FDDI address:

Enter the client processor's hardware network address. For example, 08-00-2b-02-67-e1: 08-00-2b-30-68-96

Refer to the *Network Programmer's Guide* or Section 6.2 for information about how to obtain a network hardware address. If you do not enter the hardware address in the correct format (for example, too many numbers), the utility displays an error message and repeats the prompt as shown in the following example:

08-2b-30-68-9696 is an invalid Ethernet or FDDI address.

Enter the client processor's hardware network address.
For example, 08-00-2b-02-67-e1:

Note

The utility does not check the validity of the address you enter; however, the utility does check to make sure the address you enter is in the correct format.

13. After you enter a valid hardware network address, the utility checks to see if there is enough free space in `/clients` to create the `root` and `var` file systems for the client. The following message is displayed:

```
Checking file system space required for client
root and var file systems.
```

14. If there is not enough free space available to create the file system, the following message is displayed:

```
There is not enough free space in /clients
to create the root and var file systems
for client1. client1 has not been added.
```

The DMU Main Menu is displayed.

15. If there is enough space to create the `root` and `var` file systems, the `dmu` utility copies the DMS environment `root` area to the `/clients/clientname` area, creates the `/var` file system for the client, and displays the following message:

```
Creating the root and var file systems for client1

Client client1 has been added.
```

Notify the client's system administrator when client registration is complete, and inform them that they can now boot the client across the network. See Section 12.3 for basic information about booting a client. Detailed booting information is in the *Installation Guide*.

12.3 Booting a DMS Client

After a DMS client is added to the appropriate environment, the client's system administrator can boot the client over the network. When the client starts to boot, the kernel that boots over the network is:

```
/clients/hostname /.vmunix
```

The following occurs when the client boots:

- `/clients/hostname` is NFS mounted as `/` (root)
- `/var/adm/dms/dmsN.alpha/root/usr` is NFS mounted as `/usr`

The network information you entered about the client when the client was added to the environment is sufficient to boot successfully across the LAN.

DMS clients must be able to boot over Ethernet or FDDI LAN. The basic procedure for booting a processor over the network from a server is to shut down the client system to console mode and then issue a boot command from the client.

Refer to the *Installation Guide* for information about booting specific processors.

When the client boots, the client system administrator is prompted to enter a superuser password. The superuser password must contain between 6 and 16 characters and should use a combination of upper and lower case letters. You should use special characters such as the dollar sign (\$), percent sign (%), asterisk (*), and numbers in the password. The password is not displayed on the screen for security reasons. A second prompt asks for the new password again as validation. The screen display is similar to the following:

```
*** SUPERUSER PASSWORD SPECIFICATION **  
  
Changing password for root.  
  
Enter root password:  
Retype root password:
```

System information is displayed while the client system is coming up. When the Common Desktop Environment (CDE) login window or the login prompt appears, enter `root` as the login name. At the prompt for a password, enter the superuser password that was specified previously.

12.4 Deleting a Software Environment

When you delete a software environment, the environment itself and all clients registered to that environment are deleted in a destructive manner. That is, once you confirm your choice, there is no opportunity to undo the deletion.

Caution

Make sure that the clients registered to the environment have been notified and shut down before you delete the environment. Failure to do so will cause a running client to lose its operating system.

To delete a software environment, use the following steps:

1. Invoke the `dmu` utility by entering `/usr/sbin/dmu` at the root system prompt, and choose the `DELETE` software environments option by entering `d` at the prompt:

*** DMU Main Menu ***

- a) ADD a client
- c) CONFIGURE software environments
- d) DELETE software environments
- i) INSTALL software environments
- l) LIST registered clients
- m) MODIFY a client
- r) REMOVE a client
- s) SHOW software environments
- x) EXIT

Enter your choice: **d**

2. The utility displays a list of the existing dataless environments and prompts you to choose the environment you want to delete:

Select the remote dataless environment:

- 1) /var/adm/dms/dms0.alpha
'DIGITAL UNIX V4.0F Operating System (Rev nnn)'
- 2) /var/adm/dms/dms1.alpha
'DIGITAL UNIX V4.0F Operating System (Rev nnn)'
'Sort Runtime Library'
- 3) /var/adm/dms/dms2.alpha
'DIGITAL UNIX V4.0F Operating System (Rev nnn)'
'System V Environment'

Enter your choice: **1**

3. After you select the dataless environment to delete, a confirmation displays your choice:

The following environment will be deleted from
/var/adm/dms/dms0.alpha:

Description
'DIGITAL UNIX 4.0F Operating System (Rev nnn)'

Is that correct? (y/n) [y]:

If you enter n, the utility returns to the DMU Main Menu. If you enter y, the following message displays:

After this deletion, the area /var/adm/dms/dms0.alpha will be empty. The following clients are registered for /var/adm/dms/dms0.alpha:
client1 client2 client3

This procedure will completely remove /var/adm/dms/dms0.alpha.
Do you want to continue? (y/n) [n]:

If you enter n or press the Return key (to accept the default), the utility returns to the DMU Main Menu and does not delete the environment or the clients registered to it. If you enter y, the utility deletes the DMS environment and all the clients registered to that environment and displays the following message:

Do you want to remove the client's root file system
[/clients/client1]? (y/n) [n]:

The utility prompts you to answer whether or not you want to remove the `root` and `var` file systems for each client registered to the environment. This is your opportunity to save customized data in the `root` directory. If you enter `n`, all customized data in `root` will be lost.

After the deletion is complete, the utility returns to the DMU Main Menu.

12.5 Modifying Client Information

The `dmu` utility lets you modify the network hardware address of a client. Refer to the *Network Programmer's Guide* or Section 6.2 in this manual for instructions about how to obtain the hardware address of a client.

To modify a client's information perform the following procedure:

1. To modify a client's hardware address, invoke the `dmu` utility (by entering `/usr/sbin/dmu` at the `root` system prompt), and choose the MODIFY a client option by entering `m` at the prompt:

```
*** DMU Main Menu ***

a) ADD a client
c) CONFIGURE software environments
d) DELETE software environments
i) INSTALL software environments
l) LIST registered clients
m) MODIFY a client
r) REMOVE a client
s) SHOW software environments
x) EXIT
```

Enter your choice: `m`

2. The `dmu` utility displays a list of the registered clients. It does not display the DMS environment to which the client is registered.

The following clients are available to modify:

```
client4 client5 client6
```

Enter the client processor's hostname or press RETURN to quit:

```
client4
```

If you do not enter a client name and press the Return key, the utility returns to the DMU Main Menu.

3. If you enter a valid client name, you are prompted to enter the client's new Ethernet or FDDI address. The client's current hardware address is the default response.

Note

The utility does not check the validity of the address you enter; however, the utility does check to make sure the address you enter is in the correct format.

```
Enter the client processor's hardware network address. For example,  
08-00-2b-02-67-e1 [08-00-2b-30-68-96]:  
08-03-3c-01-55-44
```

```
Client client4 has been modified.
```

If you press the Return key instead of entering a new Ethernet or FDDI address, the address will not change. When the modification is complete, the utility returns to the DMU Main Menu.

Caution

If you want to change the client's IP address or the environment to which the client is registered, you must first shut down the client, (by using the `shutdown` command) and then remove the client from the current environment (by choosing `REMOVE` a client from the DMU Main Menu). Then, add the client to another environment (by choosing `ADD` a client from the DMU Main Menu).

12.6 Removing a Client

You must make sure the client has been shut down (using the `shutdown` command) before it is removed from an environment. A client will lose its operating system if it is removed while it is up and running. Follow these steps to remove (delete) a client from a DMS environment:

1. Invoke `dmu` by entering `/usr/sbin/dmu` at the root system prompt and choose the `REMOVE` a client option by entering `r` at the prompt. You may want to execute the `LIST` registered clients option first to determine the exact client processor host name.

```
*** DMU Main Menu ***
```

```
a) ADD a client  
c) CONFIGURE software environments  
d) DELETE software environments  
i) INSTALL software environments  
l) LIST registered clients  
m) MODIFY a client
```

```
r) REMOVE a client
s) SHOW software environments
x) EXIT
```

Enter your choice: **r**

2. **A message appears that confirms that you have chosen to remove a client processor. You are prompted to enter the client processor's host name and then to confirm the removal of the client (the default confirmation is no).**

```
You have chosen to remove a client from the remote
dataless service.
```

```
Enter the client processor's hostname or press RETURN to quit:
client5
```

If you press the Return key, the utility returns to the DMU Main Menu. If you enter a client name that is not in the DMS client database, /var/adm/dms/clients/dmsdb, the following message is displayed:

```
There is no entry for client_name in the dmsdb file.
```

If you enter a valid client name, the following prompt displays:

```
Remove client5? (y/n) [n]:
```

- **If you press the Return key, the utility returns to the DMU Main Menu.**
- **If you enter n, the utility displays the following message and returns to the DMU Main Menu:**

```
client5 was not removed.
```
- **If you enter y, the utility displays a message similar to the following:**

```
Working...Mon Jul 10 15:20:34
```

The client's registration to the DMS environment is deleted, along with the following additional items:

- **The client's root directory (including any customized files that may have been added to that directory)**
- **The entries from /etc/exports (described in Section 13.1)**
- **The entries from /etc/bootptab**
- **The client's entry in the DMS client database file (described in Section 12.1).**

Note

If you remove a client but choose to save the root (/) file system, you cannot reuse that root file system if you subsequently add a client with the same client name.

When client removal is complete, the utility returns to the DMU Main Menu.

12.7 Listing DMS Clients

Choose the `List Registered Clients` option on the DMU Main Menu to see a list of the clients registered in all dataless environments:

1. Invoke the `dmu` utility by entering `/usr/sbin/dmu` at the root system prompt and choose the `LIST` registered clients option from the menu by entering `l` at the prompt:

```
*** DMU Main Menu ***

a) ADD a client
c) CONFIGURE software environments
d) DELETE software environments
i) INSTALL software environments
l) LIST registered clients
m) MODIFY a client
r) REMOVE a client
s) SHOW software environments
x) EXIT

Enter your choice: l
The following clients are registered for /var/adm/dms/dms0.alpha:
client1 client2 client3

The following clients are registered for /var/adm/dms/dms1.alpha:
client4 client5 client6

The following clients are registered for /var/adm/dms/dms2.alpha:
client7 client8 client9
```

12.8 Showing Software Environments

The `dmu` utility lets you display a list of the current DMS environments:

1. Invoke the `dmu` utility by entering `/usr/sbin/dmu` at the root system prompt and choose the `SHOW` software environments option from the menu by entering `s` at the prompt:

```
*** DMU Main Menu ***

a) ADD a client
c) CONFIGURE software environments
```

```
d) DELETE software environments
i) INSTALL software environments
l) LIST registered clients
m) MODIFY a client
r) REMOVE a client
s) SHOW software environments
x) EXIT
```

Enter your choice: **s**

2. Your screen display will look similar to the following (depending upon the software subsets installed in each DMS environment):

```
1) /var/adm/dms/dms0.alpha
   'DIGITAL UNIX 4.0F Operating System (Rev nnn) '
2) /var/adm/dms/dms1.alpha
   'DIGITAL UNIX 4.0F Operating System (Rev nnn) '
   'System V Environment '
3) /var/adm/dms/dms2.alpha
   'DIGITAL UNIX 4.0F Operating System (Rev nnn) '
   'Sort Runtime Support'
```

After displaying the list of DMS environments, the utility returns to the DMU Main Menu.

Note

Only the operating system product name is displayed by the Show command of the `/usr/sbin/dmu` utility. To determine if a hardware release is installed in a DMS environment, use the `setld` command. For example, the following command produces a list of the subsets installed into the client `root` area of `/var/adm/dms/dms0.alpha`:

```
# setld -D /var/adm/dms/dms0.alpha/root -i
```

Refer to the `setld(8)` reference page for more information.

12.9 Maintaining the DMS Environment

This section contains information about maintaining the DMU server area.

12.9.1 Controlling Root File System Growth

The `du` command displays a summary of disk usage for file systems. Use this command to monitor the file growth in each client's `root` directory. If clients use too much space, performance is adversely affected. Users must then be told to delete all unnecessary files from their file systems. Monitor disk usage periodically depending upon the systems' use. Refer to `du(1)` for more information about monitoring file system growth.

The `df` command displays statistics about the amount of free space on a specified file system or on a file system that contains a specified file. Refer to `df(1)` for more information about monitoring file system growth.

12.9.2 Listing Installed Software Subsets

Use the `setld` utility to determine which software subsets are installed into a particular `dmsN.alpha` area. For example, the following command produces a list of the subsets installed into the client `root` area of `/var/adm/dms/dms0.alpha`:

```
# setld -D /var/adm/dms/dms0.alpha/root -i
```

Refer to the `setld(8)` reference page for more information.

12.9.3 Removing Subsets

Use the `setld` utility to remove software subsets from a `dmsN.alpha` area. For example, if you installed the Online Reference Pages subset, OSFMAN440, and now want to remove it, use a command similar to the following:

```
# setld -D /var/adm/dms/dms0.alpha/root -d OSFMAN440
```

This command removes the subset from `/var/adm/dms/dms0.alpha`. The *Installation Guide* contains a list of all software subsets.

Caution

During the installation if `setld` placed files in `root`, the product may not be fully removed from the client's `root` file system. Additionally, you should be careful about removing any subset that might be in use by client systems. For example, if you remove a subset that contains kernel build files, the clients may not be able to build new kernels. If you remove a subset that contains NFS components, the clients may not be able to reboot. It is important to understand exactly what dependencies clients have on a software component before you remove it. You may not be able to reload a subset to resolve client operational problems without first removing all of the clients and then reregistering them.

DMS Troubleshooting

This chapter contains information to assist you in troubleshooting problems with your DMS server and lists the server files and processes to check if a client is having trouble booting.

13.1 Server Areas to Check for Client Booting Problems

If a DMS client has trouble booting, you can check several aspects of server operation to ensure that the server's end of the network connection is functioning properly:

- The server may not be a Network File System (NFS) server. To check whether or not a server is an NFS server, enter the following command on the server:

```
# rcmgr get NFSSERVING
```

If the response is a 1, the system is an NFS server. If the response is a 0, the system is not an NFS server. Run `nfssetup` to configure the server to be an NFS server.

- The network daemons may not be running on the server. This condition is reported by the client with a message like the following:

```
panic: vfs_mountroot: cannot mount root
```

If this message appears on the client, check to make sure that the following daemons are running on the server:

- portmap
- mountd
- nfsd
- nfsiod

Enter the following command on the server to see if the daemons are running:

```
# ps ax | grep -E "portmap|mountd|nfsd|nfsiod"
```

Process status will appear for any of those daemons that are running. (A line will also appear showing your `egrep` command.) If the daemons are not all running, you must start the inoperative ones.

- The client's directories may be exported improperly. Determine if this is the case by examining entries in the server's `/etc/exports` file:
 - If the client boots to single-user mode but will not boot to multiuser mode, make sure that the appropriate `/usr` file system and `dmsN` root area have entries in `/etc/exports`. Proper `/etc/exports` entries should look similar to the entry shown below. In this example, the client name is `client1`.

```
/clients/client1 -r=0 client1
/var/adm/dms/dms0.alpha/root/usr -r=0 -ro
```

The contents of these entries are described in the `exports(5)` reference page.

- If you are installing a hardware update release and you configure the DMS environment before you add the operating system hardware update, you must connect to the `root` directory in the DMS environment and issue the following two commands to undo the configuration:


```
# rm -rf usr/sys/conf/DATALESS
# rm -rf usr/sys/DATALESS
```
- If you cannot execute commands on the client and the server and client are on different versions of the software, check to see if you copied the `dmu` version on the client on to the server. Refer to Section 11.1 for more information.
- If you encounter the following warning when booting a DMS client, there is a problem with the disk or disk partition designated as the swap device when the dataless client was registered.

```
WARNING: /dev/rz6c swap partition has unused fstype, failed to add swap.
: Swap is being set to lazy (over commitment) mode. The system will
: come up to single-user mode. Set fstype for swap partition to
: "swap" using "disklabel -s swap" command and reboot.
```

Follow this procedure on the client system to correct this problem.

1. As superuser, change directory to `/dev`.


```
# cd /dev
```
2. Execute the `MAKEDEV` utility on the disk or disk partition designated as the swap device.


```
# ./MAKEDEV swapdev
```
3. Set the file system type for `swapdev` by executing the `disklabel` utility. Remember to specify `swapdev` as a raw device.


```
# disklabel -sF /dev/rswapdev swap
```
4. Reboot the client system.

A

RIS Worksheet

This appendix contains a worksheet for recording setup information for the RIS client. Make as many copies of this worksheet as you need.

RIS Client Configuration Worksheet

Network

System name: _____

Network hardware address: -----

IP network address: _____

Internet domain: _____

RIS Info

Client operating system: _____

Processor architecture: _____

Server system name: _____

RIS environment name: _____

Products: _____

Duplication

Duplicate another client? No Yes

Name of client to copy: _____

ZK-0618U-AI

B

DMS Worksheets

This appendix contains three DMS worksheets. Two of the worksheets are used to calculate the amount of disk space required for the DMS environments and `/clients` area. The third worksheet is used to record individual DMS client information. Make as many copies of these worksheets as you need. The worksheets are printed on only one side of the page so you can easily photocopy them. To keep all your calculations together, use the back side of each worksheet for additional notes or for calculating the numbers you insert into fields on the worksheet.

The following worksheets are included:

- Disk space allocation for the `/var/adm/dms/dmsN.alpha` environments
- Disk space allocation for the `/clients` area
- Individual DMS client information

Disk Space Required for Dataless Environments

Use this worksheet to calculate the amount of space required for a single `/var/adm/dms` file system. If you want multiple `/var/adm/dms` environments, you must prepare a separate sheet for each environment. Each environment has a number: the first is `/var/adm/dms/dms0.alpha`, the second is `/var/adm/dms/dms1.alpha`, and so on. Fill in the number of this `/var/adm/dms/dms n.alpha` environment on the top line.

Disk Space for the `/var/adm/dms/dms ____ .alpha` File System

Using the appropriate subset size information, follow these steps to find how much space you need for a `/var/adm/dms/dms n.alpha` environment:

Step 1

Decide which subsets and layered products you want to install, add up their total sizes in megabytes, and enter the sums here. Subset names and descriptions are located in the *Installation Guide*; subset sizes are located in the *Release Notes*. Layered product information is located in the products' Software Product Descriptions (SPDs).

MANDATORY subset space: _____ MB

OPTIONAL subset space: _____ MB

Layered product space: _____ MB

Step 2

Add up the sizes from step 1 to arrive at the amount of space your dataless environment will require.

Subtotal: _____ MB

Step 3

Allocate an additional 10% of the space from step 2 for file system administration and other information. Enter that number here:

10% overhead space: _____ MB

Step 4

Add together the amounts of space from steps 2 and 3. The total is the amount of space you should allocate for this environment.

Total space for `/var/adm/dms/dms ____ .alpha`: _____ MB

ZK-1017U-AI

Disk Space for the /clients File System

Using the appropriate memory size information for your clients, follow these steps to find how much space you need for the /clients area.

Step 1 To allow at least 30 megabytes(MB) for an individual client's root area, multiply the number of clients in the /clients area by 30.

Number of clients () x 30 = _____ MB

Step 2 Allocate an additional 15 MB per client for files added by users. Multiply the number of clients by 15 and enter that value here.

Number of clients () x 15 = _____ MB

Step 3 Allocate an additional 15 MB for clients that have partial kernel build areas. Multiply the number of clients with partial kernel build areas by 15 and enter that value here.

Number of clients () x 15 = _____ MB

Step 4 Allocate an additional 100 MB for clients that have full kernel build areas. Multiply the number of clients with full kernel build areas by 100 and enter that value here.

Number of clients () x 100 = _____ MB

Step 5 Add the above figures. The total is the amount of space you should allocate for the /clients area.

Total space for /clients file system: _____ MB

DMS Client Setup Worksheet

This worksheet is used for recording the information you need to know when adding a client to a DMS environment using the `ADD a client` menu option. If you are adding multiple clients, you must prepare a separate sheet for each client. Fill in the client's system name (host name) on the next line.

Registration Information for DMS Client _____

Network

The client's Ethernet or FDDI hardware address in the form of six two-character groups separated by minus signs.

For example, 08002f03f508

		-			-			-			-			-			-		
--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--	---	--	--

The client's network interface type. _____

For example, `ln0` or `tu0`, etc.

The client's subnet mask. _____

For example, `255.255.255.0`

The client's route address. _____

(gateway FROM the client TO the server)

For example, `16.69.144.199`

The route address is only required if the server and client are on different networks.

DMS Information

The name of the dataless environment to which this client will be added. For example,
`/var/adm/dms/dms n.alpha` _____

The name of the `/clients` area.
For example, `/clients/hostname` _____

The client's swap device and partition.
For example, `/dev/rz0b` _____

The client's swap device type.
For example, `RZ26` _____

The kernel build type (Full, Partial, or None) _____

C

Using the utilupdate Utility

Use the `utilupdate` utility provided on your distribution media to update the versions of the `ris` and `dmu` utilities on a server that is not running the latest version of the operating system. This enables you to serve the latest version of the operating system to client systems.

`utilupdate [-r] [-d] -m directory`

There are three parameters for the `utilupdate` utility:

- `-r` Indicates that the `ris` utility and associated programs should be updated.
- `-d` Indicates that the `dmu` utility and associated programs should be updated.
- `-m` This parameter is required, and specifies the *directory* where the operating system distribution is mounted.

Note

If you do not specify the `-r` or `-d` parameter, the `utilupdate` utility only updates the components of the `setld` utility needed to support the `ris` and `dmu` utilities on the server. This updates the version of the `setld` utility in the `/var/adm/ris/bin` directory, but does not change the server's version of the `setld` utility. Refer to the `setld(8)` reference page for more information.

Glossary

This glossary defines terms and concepts related to software sharing.

B

BIND

The Berkeley Internet Name Domain. A distributed database lookup service that allows you to distribute the `hosts` database network-wide.

C

CDF

Configuration description file. The process of installing a new version of the operating system automatically generates a configuration description file (CDF) that contains the results of the questions answered during the installation. This CDF is saved to the file `/var/adm/smlogs/install.cdf`. The CDF contains all the configuration information required to perform an initial system installation on a client system. CDFs can be copied and modified to use for installation cloning.

client

A computer system that uses resources provided by another computer, called a **server**.

client area

In DMS, an area containing a single client's custom-tailored root files including the operating system kernel.

configuration description file

See *CDF*

D

Dataless Management Services

See *DMS*

DHCP

Dynamic Host Configuration Protocol. Enables the automatic assignment of an IP address to clients on networks from a pool of addresses. The IP

address assignment and configuration occurs automatically whenever appropriate client systems (workstations and portable computers) attach to a network. The current implementation of DHCP is based on the JOIN product by Competitive Automation.

DMS

Dataless Management Services. A service where a server maintains the `root`, `/usr`, and `/var` file systems for client computer systems connected to the server by means of a local area network (LAN).

DMS area

A reserved disk area physically connected to a DMS server which contains multiple copies of the root area, one for each DMS client.

DMS client

A computer system whose system disk area is physically connected to a DMS server rather than to the client itself and is accessed across the network by the client.

DMS client area

A DMS client area resides in each DMS area and is called `/clients`. Multiple copies of the root area reside in the client area, each tailored from the appropriate generic root for an individual client.

DMS environment

A portion of a DMS area, containing software to support one or more clients. A DMS environment contains one or more DMS root areas. DMS environments are located in `/var/adm/dms`.

DMS root area

One root area is required for each client that is to be supported in the DMS environment. DMS root areas are located in `/var/adm/dms/dmsN.alpha`. Each root area contains a generic root directory and a shared `/usr` file system.

DMS server

A computer system that maintains the `root/usr` and `/var` file systems for DMS client systems. The DMS servers can contain multiple DMS environments to which clients are added. DMS clients are booted over a local area network (LAN). Swapping and dumping is not supported over the network and must be done on the clients' local disks.

Dynamic Host Configuration Protocol

See *DHCP*

G

generic root

In DMS, a portion of the DMS environment that contains system software in a generic form, ready to be copied for tailoring to fit an individual client's requirements.

N

NIS

Network Information Service. A distributed data lookup service for sharing information on a local area network (LAN). NIS allows you to coordinate the distribution of database information throughout your networked environment.

new files

In DMS, refers to files that are exactly as supplied in the software distribution kit and have not been customized. These files are used by the update installation process and allow the files to be delivered onto the system without overwriting the existing, and possibly customized version of the file. New files have a `.new.` prefix, and should never be modified.

See also *prototype files*

P

private area

In DMS, a portion of the DMS area that is reserved for the exclusive use of a single client. The private area contains the client's custom-tailored copy of certain operating system software files, including the kernel.

product environment

In RIS, a portion of the RIS area containing a set of software kits that are intended for installation on a particular client type, such as RISC processors.

prototype files

In DMS, refers to files that can be modified by the server's system administrator so that they can be customized for a particular client site, such as `/etc/hosts` entries. Prototype files are prefixed with `.proto..` and can be customized before the DMS environment is configured.

See also *new files*

R

Remote Installation Services

See *RIS*

RIS

Remote Installation Services. A remote software distribution method where a server is set up to allow installation of software products over a local area network (LAN). RIS clients are registered on the RIS server to allow them access to specific software products.

RIS area

A reserved disk area physically connected to a RIS server, containing one or more product environments. These contain software kits that can be installed on registered clients. Kits are organized so that a software product can supply several different versions for multiple hardware platforms.

RIS client

A computer system that has permission to install software across the network by accessing kits stored in the server's RIS area.

RIS server

A computer system that serves other computers by providing operating system software for them to install; the software is stored on disks belonging to the server and is accessed across the network by the clients.

S

server

A computer system that serves one or more other computers, called clients, by providing a resource to them.

subset

An installable software kit module that is compatible with the operating system's `setld` software installation utility.

T

TFTP

Trivial File Transfer Protocol. TFTP is used during the RIS startup procedure to transfer the network kernel and supporting files from the RIS server to the RIS client. For more information on TFTP, refer to the `tftp(1)` and `tftpd(8)` reference pages.

U

`/usr/sbin/dmu`

Dataless management utility (`dmu`). A text-base interface used to manage the sharing of installed operating software between DMS servers and clients. The `dmu` utility allows users to install, configure, show, and delete DMS environments and add, list, modify, and remove DMS clients.

`/usr/sbin/ris`

Remote Installation Services utility (`ris`). A text-based interface used to set up the RIS server and maintain RIS areas, the software products within the RIS areas, and RIS client registrations.

Index

A

- adding
 - a DMS client, 12-2
 - a hardware product kit to RIS, 6-7
 - a RIS client, 6-2
 - DMS clients to `/etc/hosts` file, 10-2
 - RIS clients to `/etc/hosts` file, 6-2
 - software to existing DMS environment, 11-10
- address
 - gateway, 6-2
 - hardware, 6-2
- allocating disk partitions for DMS, 10-3
- architecture
 - of RIS, 2-1

B

- Berkeley Internet Name Domain (*See BIND*)
- BIND, 6-2, 10-9
- BIND Configuration Application, 10-9
- booting
 - a DMS client, 12-7
 - a RIS client, 5-1
 - problems with DMS clients, 13-1
- bootp, 5-1t
- bootp protocol
 - requirement for, 3-4
- bootptab, 5-1t
- bootptab file, 5-1, 5-2, 7-6

C

- C2 security in DMS, 10-9
- C2 security in RIS, 3-5
- calculating
 - disk space for DMS, 10-4
 - disk space for DMS file systems, 10-4
- CD-ROM
 - mounting, 4-1, 11-2
- CDF
 - copying to RIS server, 8-5
 - location, 8-4
 - overview, 8-1
 - relationship of user-supplied files, 8-2
- checking
 - status of daemons, 13-1
- client
 - adding for DMS, 12-2
 - architecture of DMS, 9-2
 - characteristics of DMS client, 9-5
 - compatibility with the server, 11-1
 - defined, 1-1
 - description of, 1-2
 - DMS
 - booting, 12-7
 - multiuser mode, failure to enter, 13-2
 - troubleshooting, 13-1
 - hardware compatibility for DMS, 10-1, 11-2
 - hardware compatibility for RIS, 3-2
 - listing for RIS, 6-10
 - listing in DMS, 12-13

- naming service registration for
 - DMS, 10-9
- registering for DMS, 10-8
- registration for RIS, 6-1
- registration information, 12-2
- registration information for
 - DMS, 10-8
- removing from DMS, 12-11
- removing from RIS, 6-10
- software version compatibility
 - for DMS, 10-1, 11-2
- software version compatibility
 - for RIS, 3-2
- view of DMS areas, 9-5
- client area
 - calculating disk space for DMS, 10-6
 - in DMS, 9-5
- client areas
 - establishing multiple for DMS, 9-5
- cloned client
 - registration problems, 7-4
- compatibility
 - DMS server and client, 11-2
 - RIS server and client, 3-2
- configuring
 - DMS environments, 11-15
- controlling
 - growth of DMS root area, 12-14
- creating
 - RIS area, 4-1

D

- daemon
 - bootp, 7-6
 - inetd, 5-2
 - internet, 5-2
 - joind, 5-2
 - moundd, 10-4
 - network
 - checking status for DMS, 13-1
 - nfsd, 10-4
 - nfsiod, 10-4
 - portmap, 10-4
 - required by NFS, 10-4
 - tftpd, 5-4, 7-9
- Dataless Management Services
 - (*See also DMS*)
- deleting
 - a DMS client, 12-11
 - a DMS software environment, 12-8
 - a RIS client, 6-10
 - RIS product list, 6-11
- determining
 - software subset size, 10-7
- disk partitions
 - allocating for DMS, 10-3
 - on DMS server, 10-2
- disk space
 - allocating for DMS, 10-3
 - for DMS client area, 10-6
 - overhead for DMS
 - administration, 10-5
 - planning for DMS, 10-4, 10-5
 - planning for RIS, 3-3
 - showing use of, 12-14
- displaying
 - disk usage, 12-14
- distribution device
 - description of, 1-2
- distribution media
 - (*See also CD-ROM*)
- DMS, 9-1
 - adding a client, 12-2
 - booting a client, 12-7
 - C2 security, 10-9
 - client
 - troubleshooting, 13-1
 - client area, 9-5
 - client registration, 10-8
 - client system disk space, 10-4
 - configuring environments, 11-15
 - controlling growth of root area, 12-14
 - definition of, 9-1
 - deleting an environment, 12-8

- disk space for environments, 10-4
- environment, 9-3
- files in usr area, 9-4
- installing operating system on server, 10-7
- installing required software subsets, 10-7
- installing software in new environment, 11-2
- listing clients, 6-10, 12-13
- maintaining the environment, 12-14
- multiple environments, 9-4
- planning disk space, 10-4
- problems booting a client, 13-1
- removing a client, 6-10, 12-11
- required software for environments, 10-4
- root area, 9-2, 9-3f
- server management tasks, 12-1
- server preparation, 10-1
- showing product list, 6-10, 12-13
- software version on server, 10-1
- system components, 1-2
- DMS area, 9-2
 - contents of, 9-2, 9-3
 - defined, 1-1
- DMS client
 - booting problems, 13-1
 - database file, 12-1
 - defined, 1-1
 - full build support, 10-6
 - information required for, 10-8
 - modifying environment for, 12-11n
 - no build support, 10-6
 - partial build support, 10-7
 - planning disk space, 10-4
 - planning swap space, 10-8
 - types of kernel builds for, 10-6
- DMS clients
 - requirements for, 10-2
- DMS environment
 - adding software to existing, 11-10

- modifying for client, 12-11n
 - naming conventions for, 11-9
 - DMS IP address
 - modifying for client, 12-11n
 - DMS server
 - defined, 1-1
 - LAN installation, 10-3
 - maintaining, 12-14
 - NFS installation, 10-3
 - partition information, 10-2
 - planning disk space, 10-4
 - DMS servers
 - requirements for, 10-1
 - dms.alpha areas, 10-4
 - du command, 12-14

E

- environment
 - (*See DMS environment*)
- environments area, 9-4f
 - (*See also DMS environment*)
 - calculating disk space, 10-4
 - /etc/bootptab file, 7-6
 - /etc/exports file, 13-2
 - adding DMS clients to, 10-9
 - /etc/hosts file, 10-9
 - /etc/inetd.conf file, 7-6
- Ethernet, 10-3
 - (*See also LAN*)
 - address of RIS client, 6-2
 - setting up a client on, 3-5
- Ethernet address
 - specifying for DMS client, 12-6
- exported file systems for DMS, 13-2
- exports file, 13-2
 - entries, 13-2

F

- FDDI
 - (*See also LAN*)
 - setting up a client on, 3-5
- FDDI address

- specifying for DMS client, 12–6
- file
 - new, 9–4
 - root area, 9–3f
 - usr area, 9–4
- file system
 - DMS environments, 10–4
 - exported for DMS client, 13–2
- files
 - invoking during installation process, 8–1
- full build support for DMS client, 10–6
- full installation
 - relationship between CDF and user-supplied files, 8–2

G

- gateway address, 6–2

H

- hardware
 - compatibility for DMS, 10–1, 11–2
 - compatibility for RIS, 3–2
- hardware address, 6–2
 - finding, 6–5
 - modifying for DMS client, 12–10
 - specifying for DMS client, 12–6
- hardware product kits
 - including into an existing RIS area, 4–9
 - RIS support of, 4–9
- hardware update release
 - release installation, 11–12
 - troubleshooting, 13–2
- host name
 - limitations on, 10–8
- hosts file
 - adding DMS clients to, 10–9
 - adding RIS clients to, 6–2

I

- including hardware product kits in a RIS area, 4–9
- inetd, 5–2
- inetd daemon, 5–1t
- inetd.conf file, 5–1t, 7–6
- installation
 - of hardware product kits, 4–9
 - of Hardware Update Release, 11–12
 - of RIS software subsets
 - in existing area, 4–8
 - in new area, 4–1
 - of server operating system for RIS, 3–4
- installation cloning
 - administrator tasks, 8–3
 - description, 8–1
- installation of RIS server
 - LAN installation, 3–5
- installing
 - NFS, 10–3
 - operating system on DMS server, 10–7
 - required software subsets for DMS, 10–7
 - software in existing DMS environment, 11–10
 - software in new DMS environment, 11–2
- Internet
 - (*See IP address*)
- Internet address
 - (*See IP address*)
- IP address
 - registering, 6–2
 - registering for DMS client, 10–9

J

- joind, 5–1t, 5–2
- joind daemon, 5–1t, 7–6

K

- kernel
 - customized for DMS clients, 9–5f
 - full build support for DMS client, 10–6
 - generic, 9–3f
 - no build support for DMS client, 10–6
 - partial build support for DMS client, 10–7
 - types of build support for DMS clients, 10–6
- kit
 - (*See subset*)

L

- LAN, 1–1, 1–2
 - host addresses on, 10–9
 - installation of RIS server, 3–5
 - installing DMS server, 10–3
- layered products
 - disk space on DMS servers, 10–5
- License Management Facility
 - (*See LMF*)
- list of
 - mandatory subsets, 4–4, 11–4
- listing
 - DMS clients, 12–13
 - installed subsets, 12–15
 - RIS clients, 6–10
- listing RIS products, 6–10
- LMF
 - required for servers, 10–1
- local area network
 - (*See LAN*)

M

- management of RIS, 6–1
- mandatory subsets
 - list of, 4–4, 11–4
 - space required, 10–5
 - trouble with, 7–3

- modifying
 - environment for DMS client, 12–11n
 - IP address for DMS client, 12–11n
 - network hardware address for DMS client, 12–10
 - prototype files, 11–16
- MOP protocol
 - host naming conventions imposed by, 6–3, 6–8
- mountd daemon, 10–4
- mounting
 - a CD-ROM, 11–2
- multiple client areas in DMS, 9–5
- multiuser mode
 - client failure to enter, 13–2

N

- naming conventions
 - for DMS environments, 11–9
- naming service, 6–1
 - registering DMS clients, 10–9
 - registering RIS clients, 6–2
- network
 - file system, 9–2
 - naming service, 6–1
- Network Configuration Application utility, 10–9
- network daemons
 - for DMS, 13–1
- Network File System
 - (*See NFS*)
- network hardware address
 - modifying for DMS client, 12–10
 - specifying for DMS client, 12–6
- network information
 - for DMS servers and clients, 10–2
- Network Information Service
 - (*See NIS*)
- network interface
 - for DMS clients, 10–8
- network naming service
 - registering DMS client, 10–8

- new files, 9-4
- NFS
 - checking status of server, 13-1
 - daemons required by, 10-4
 - installation, 10-3
 - used by DMS, 9-2
 - using a remote RIS area, 4-13
 - using mount point to install software, 10-2, 11-3
- nfsd daemon, 10-4
- nfsiod daemon, 10-4
- NIS, 6-2, 10-9
- NIS utility, 10-9
- no build support for DMS client, 10-6

O

- operating system
 - installable by RIS, 2-4
 - installing on DMS server, 10-7
 - installing on RIS server, 3-4
 - tailored for DMS client, 9-5f
- overhead
 - disk space, 10-5

P

- PAK
 - required for servers, 10-1
- partial build support for DMS client, 10-7
- partitions
 - on DMS server, 10-2
- planning
 - disk space for DMS, 10-4
- planning disk space for RIS, 3-3
- portmap daemon, 10-4
- postload files
 - copying to RIS server, 8-5
- preinstall files
 - copying to RIS server, 8-5
- problems, 13-1
- product

- showing list of, 12-13
- Product Authorization Key
 - (*See PAK*)
- product environment, 2-3
 - deleting products in, 6-11
 - listing RIS products in, 6-10
 - multiple in single RIS area, 2-4
 - RIS products in listing, 6-10
- profile set
 - creating the directory for, 8-6
 - definition, 8-6
 - deleting from RIS server, 6-11
 - naming convention, 8-6
- protected system files, 9-4
- prototype files
 - customizing DMS environments, 11-16

R

- registering a client, 6-1
 - for DMS, 10-8, 10-9
 - information required for DMS client, 10-8, 12-2
 - information required for RIS clients, 6-2
 - problems in RIS, 7-2
 - with naming service, 6-2, 10-9
- registration problems
 - cloned client, 7-4
- remote boot
 - flow, 5-4
- Remote Installation Services
 - (*See RIS*)
 - definition, 2-1
- remove
 - DMS client root directory, 11-10n
- removing
 - a DMS client, 12-11
 - a DMS software environment, 12-8
 - a RIS client, 6-10
 - software subsets, 12-15
- required software subsets
 - for DMS server, 10-1

- requirements
 - for DMS clients, 10-2
 - for DMS servers, 10-1
 - response failures
 - servers using bootpd daemon, 7-6
 - servers using joind daemon, 7-8
 - restrictions
 - running bootpd and joind, 7-6n
 - RIS, 1-2
 - architecture of, 2-1
 - checking client system
 - registration, 6-11
 - definition, 2-1
 - deleting products, 6-11
 - deleting profile set directory, 6-11
 - disk space
 - planning, 3-3
 - installing software subsets, 4-1
 - listing clients, 6-10
 - listing products, 6-10
 - management tasks, 6-1
 - product environment, 2-3
 - remote booting, 5-1, 5-4
 - removing a client, 6-10
 - removing client system from
 - registration, 6-11
 - removing multiple clients, 6-10
 - server setup, 4-1
 - startup messages, 2-3
 - startup process, 2-2
 - system components, 1-2
 - troubleshooting, 7-1
 - using an NFS mounted RIS
 - area, 4-13
 - RIS area, 2-1
 - contents of, 2-3
 - creating, 4-1
 - defined, 1-1
 - exporting and importing, 2-4
 - including hardware product
 - kits, 4-9
 - multiple, 2-4
 - RIS client
 - booting, 5-1
 - defined, 1-1
 - Ethernet address, 6-2
 - host naming conventions, 6-3, 6-8
 - preparing to register, 6-1
 - RIS daemons
 - inetd, 5-1t
 - joind, 5-1t
 - tftpd, 5-1t
 - RIS files
 - bootptab, 5-1
 - inetd.conf, 5-1
 - RIS server
 - defined, 1-1
 - ris.tty.lock file, 7-1
 - risdb file, 7-5
 - rislock file, 7-1
 - root area
 - controlling growth of DMS, 12-14
 - files in, 9-3f
 - in DMS, 9-2
 - root directory
 - losing DMS customization
 - during remove, 11-10n
 - route for network
 - for DMS clients, 10-8
 - running bootpd and joind
 - restrictions, 7-6n
- S**
-
- security in DMS, 10-9
 - security in RIS, 3-5
 - server
 - architecture of DMS, 9-2
 - compatibility with the client, 11-1
 - defined, 1-1
 - description of, 1-2
 - DMS management tasks, 12-1
 - function in DMS, 9-2
 - function in RIS, 2-1
 - hardware compatibility for
 - DMS, 10-1, 11-2
 - hardware compatibility for RIS, 3-2

- management tasks, 12–15n
- management tasks for RIS, 6–1
- operating system installation
 - for DMS, 10–7
- operating system installation
 - for RIS, 3–4
- planning disk space for DMS, 10–4
- planning disk space for RIS, 3–3
- preparing DMS server, 10–1
- RIS setup preparation, 3–1
- software version compatibility
 - for DMS, 10–1, 11–2
- software version compatibility
 - for RIS, 3–2
- worldwide installation for DMS, 11–17

setld utility

- listing subsets with, 12–15
- removing subsets with, 12–15
- using to install software for DMS, 10–7

showing

- product list, 12–13
- RIS product list, 6–10

single-user mode, 13–2

software sharing via servers, 1–2

software subsets

- choosing for RIS, 4–4
- defined for RIS, 2–4
- descriptions of, 3–4, 10–7
- for RIS, 2–4
- installing in existing DMS environment, 11–10
- installing in existing RIS area, 4–8
- installing in new RIS area, 4–1
- listing installed, 12–15
- removing, 12–15
- required for DMS, 10–7
- required for DMS environments, 10–4
- required for DMS server, 10–1
- selecting, 11–11
- sizes of, 3–4, 10–7

- version compatibility for DMS, 10–1
- space requirements
 - mandatory subsets, 10–5
- startup messages
 - RIS, 2–3
- startup process
 - RIS, 2–2
- subnet mask
 - for DMS clients, 10–8
- swap space
 - for DMS client, 10–8
- system disk space, 10–4
- system name
 - limitations on, 10–8

T

tasks

- for installation cloning, 8–3

TFTP, 5–4

tftp, 5–1t

tftp protocol

- requirement for, 3–4

tftpd, 5–1t

tftpd daemon, 5–1t, 7–9

Token Ring

- setting up a client on, 3–5

Trivial File Transfer Protocol, 5–4

troubleshooting

- client not in RIS database, 7–4
- duplicate client hardware address, 7–3
- getname failure on RIS client, 7–2
- hardware update release, 13–2
- inability to mount root file system, 7–2
- loading incorrect kernel file, 7–9
- problems booting RIS client, 7–4
- response failures on servers
 - using bootp daemon, 7–6
- response failures on servers
 - using the joind daemon, 7–8

- RIS client password expiration, 7-2
- RIS client registered on
 - multiple RIS servers, 7-4
- RIS server response problems, 7-5
 - system panics on boot, 7-2
- troubleshooting DMS servers, 13-1
- troubleshooting RIS problems, 7-1

U

- user-supplied files
 - overview, 8-1
 - relationship with CDF, 8-2
- usr area
 - files in, 9-4
- utilities
 - utilupdate , C-1
- utilupdate utility, C-1

V

- /var/adm/ris/clients/risdb file, 7-5
- version compatibility for DMS, 10-1, 11-2
- version compatibility for RIS, 3-2
- view by client of DMS areas, 9-5f

W

- worldwide
 - server installation for DMS, 11-17

Y

- Yellow Pages service
 - (*See NIS*)
- YP
 - (*See NIS*)

How to Order Tru64 UNIX Documentation

You can order documentation for the Tru64 UNIX operating system and related products at the following Web site:

<http://www.businesslink.digital.com>

If you need help deciding which documentation best meets your needs, see the Tru64 UNIX *Documentation Overview* or call **800-344-4825** in the United States and Canada. In Puerto Rico, call **787-781-0505**. In other countries, contact your local Compaq subsidiary.

To place an internal order, go to the following Web site:

<http://asmorder.nqo.dec.com>

The following table provides the order numbers for the Tru64 UNIX operating system documentation kits. For additional information about ordering this and related documentation, see the *Documentation Overview* or contact Compaq.

Name	Order Number
Tru64 UNIX Documentation CD-ROM	QA-MT4AA-G8
Tru64 UNIX Documentation Kit	QA-MT4AA-GZ
End User Documentation Kit	QA-MT4AB-GZ
Startup Documentation Kit	QA-MT4AC-GZ
General User Documentation Kit	QA-MT4AD-GZ
System and Network Management Documentation Kit	QA-MT4AE-GZ
Developer's Documentation Kit	QA-MT5AA-GZ
General Programming Documentation Kit	QA-MT5AB-GZ
Windows Programming Documentation Kit	QA-MT5AC-GZ
Reference Pages Documentation Kit	QA-MT4AG-GZ
Device Driver Kit	QA-MT4AV-G8

Reader's Comments

Tru64 UNIX

Sharing Software on a Local Area Network
AA-PS3LF-TE

Compaq welcomes your comments and suggestions on this manual. Your input will help us to write documentation that meets your needs. Please send your suggestions using one of the following methods:

- This postage-paid form
- Internet electronic mail: readers_comment@zk3.dec.com
- Fax: (603) 884-0120, Attn: UBPG Publications, ZKO3-3/Y32

If you are not using this form, please be sure you include the name of the document, the page number, and the product name and version.

Please rate this manual:

	Excellent	Good	Fair	Poor
Accuracy (software works as manual says)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Clarity (easy to understand)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Organization (structure of subject matter)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Figures (useful)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Examples (useful)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Index (ability to find topic)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
Usability (ability to access information quickly)	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

Please list errors you have found in this manual:

Page	Description
_____	_____
_____	_____
_____	_____
_____	_____

Additional comments or suggestions to improve this manual:

What version of the software described by this manual are you using? _____

Name, title, department _____

Mailing address _____


Electronic mail _____

Telephone _____


Date _____

----- Do not cut or tear - fold here and tape -----

COMPAQ



NO POSTAGE
NECESSARY IF
MAILED IN THE
UNITED STATES



BUSINESS REPLY MAIL
FIRST CLASS MAIL PERMIT NO. 33 MAYNARD MA

POSTAGE WILL BE PAID BY ADDRESSEE

COMPAQ COMPUTER CORPORATION
UBPG PUBLICATIONS MANAGER
ZKO3 3/Y32
110 SPIT BROOK RD
NASHUA NH 03062 9987



----- Do not cut or tear - fold here and tape -----

Cut on this line