



Application Packaging Developer's Guide

Sun Microsystems, Inc.
2550 Garcia Avenue
Mountain View, CA 94043-1100
U.S.A.

Part No: 802-5892-10
August, 1997

Copyright 1997 Sun Microsystems, Inc. 901 San Antonio Road, Palo Alto, California 94303-4900 U.S.A. All rights reserved.

This product or document is protected by copyright and distributed under licenses restricting its use, copying, distribution, and decompilation. No part of this product or document may be reproduced in any form by any means without prior written authorization of Sun and its licensors, if any. Third-party software, including font technology, is copyrighted and licensed from Sun suppliers.

Parts of the product may be derived from Berkeley BSD systems, licensed from the University of California. UNIX is a registered trademark in the U.S. and other countries, exclusively licensed through X/Open Company, Ltd.

Sun, Sun Microsystems, the Sun logo, SunSoft, SunDocs, SunExpress, SunOS, JumpStart, and Solaris are trademarks, registered trademarks, or service marks of Sun Microsystems, Inc. in the U.S. and other countries. All SPARC trademarks are used under license and are trademarks or registered trademarks of SPARC International, Inc. in the U.S. and other countries. Products bearing SPARC trademarks are based upon an architecture developed by Sun Microsystems, Inc.

The OPEN LOOK and Sun™ Graphical User Interface was developed by Sun Microsystems, Inc. for its users and licensees. Sun acknowledges the pioneering efforts of Xerox in researching and developing the concept of visual or graphical user interfaces for the computer industry. Sun holds a non-exclusive license from Xerox to the Xerox Graphical User Interface, which license also covers Sun's licensees who implement OPEN LOOK GUIs and otherwise comply with Sun's written license agreements.

RESTRICTED RIGHTS: Use, duplication, or disclosure by the U.S. Government is subject to restrictions of FAR 52.227-14(g)(2)(6/87) and FAR 52.227-19(6/87), or DFAR 252.227-7015(b)(6/95) and DFAR 227.7202-3(a).

DOCUMENTATION IS PROVIDED "AS IS" AND ALL EXPRESS OR IMPLIED CONDITIONS, REPRESENTATIONS AND WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE OR NON-INFRINGEMENT, ARE DISCLAIMED, EXCEPT TO THE EXTENT THAT SUCH DISCLAIMERS ARE HELD TO BE LEGALLY INVALID.

Copyright 1997 Sun Microsystems, Inc. 901 San Antonio Road, Palo Alto, Californie 94303-4900 Etats-Unis. Tous droits réservés.

Ce produit ou document est protégé par un copyright et distribué avec des licences qui en restreignent l'utilisation, la copie, la distribution, et la décompilation. Aucune partie de ce produit ou document ne peut être reproduite sous aucune forme, par quelque moyen que ce soit, sans l'autorisation préalable et écrite de Sun et de ses bailleurs de licence, s'il y en a. Le logiciel détenu par des tiers, et qui comprend la technologie relative aux polices de caractères, est protégé par un copyright et licencié par des fournisseurs de Sun.

Des parties de ce produit pourront être dérivées du système Berkeley BSD licenciés par l'Université de Californie. UNIX est une marque déposée aux Etats-Unis et dans d'autres pays et licenciée exclusivement par X/Open Company, Ltd.

Sun, Sun Microsystems, le logo Sun, SunSoft, SunDocs, SunExpress, SunOS, JumpStart et Solaris sont des marques de fabrique ou des marques déposées, ou marques de service, de Sun Microsystems, Inc. aux Etats-Unis et dans d'autres pays. Toutes les marques SPARC sont utilisées sous licence et sont des marques de fabrique ou des marques déposées de SPARC International, Inc. aux Etats-Unis et dans d'autres pays. Les produits portant les marques SPARC sont basés sur une architecture développée par Sun Microsystems, Inc.

L'interface d'utilisation graphique OPEN LOOK et Sun™ a été développée par Sun Microsystems, Inc. pour ses utilisateurs et licenciés. Sun reconnaît les efforts de pionniers de Xerox pour la recherche et le développement du concept des interfaces d'utilisation visuelle ou graphique pour l'industrie de l'informatique. Sun détient une licence non exclusive de Xerox sur l'interface d'utilisation graphique Xerox, cette licence couvrant également les licenciés de Sun qui mettent en place l'interface d'utilisation graphique OPEN LOOK et qui en outre se conforment aux licences écrites de Sun.

CETTE PUBLICATION EST FOURNIE "EN L'ETAT" ET AUCUNE GARANTIE, EXPRESSE OU IMPLICITE, N'EST ACCORDEE, Y COMPRIS DES GARANTIES CONCERNANT LA VALEUR MARCHANDE, L'APTITUDE DE LA PUBLICATION A REPONDRE A UNE UTILISATION PARTICULIERE, OU LE FAIT QU'ELLE NE SOIT PAS CONTREFAISANTE DE PRODUIT DE TIERS. CE DENI DE GARANTIE NE S'APPLIQUERAIT PAS, DANS LA MESURE OU IL SERAIT TENU JURIDIQUEMENT NUL ET NON AVENU.



Contents

Preface ix

1. Designing a Package 1

Where to Find Packaging Tasks 1

What Are Packages? 2

Package Components 2

 Required Package Components 3

 Optional Package Components 4

Things to Think About Before Building a Package 5

 Make Packages Installable Remotely 6

 Optimize for Client-Server Configurations 6

 Package by Functional Boundaries 6

 Package Along Royalty Boundaries 6

 Package by System Dependencies 6

 Eliminate Overlap in Packages 7

 Package Along Localization Boundaries 7

Packaging Commands, Files, and Scripts 7

2. Building a Package 11

Task Map: The Process of Building a Package 11

Package Environment Variables 13

General Rules on Using Environment Variables	13
Package Environment Variables Summary	14
Creating a <code>pkginfo</code> File	15
Defining a Package Instance	15
Defining a Package Name (<code>NAME</code>)	16
Defining a Package Category (<code>CATEGORY</code>)	17
▼ How to Create a <code>pkginfo</code> File	17
Organizing a Package's Contents	18
▼ How to Organize A Package's Contents	18
Creating a <code>prototype</code> File	20
The Format of the <code>prototype</code> File	20
Creating a <code>prototype</code> File From Scratch	26
Creating a <code>prototype</code> File With the <code>pkgproto</code> Command	26
Fine-Tuning a <code>prototype</code> File Created With the <code>pkgproto</code> Command	27
Adding Functionality to a <code>prototype</code> File	29
▼ How to Create a <code>prototype</code> File Using the <code>pkgproto</code> Command	32
Building a Package	34
Using the Simplest <code>pkgmk</code> Command	34
The <code>pkgmap</code> File	34
▼ How to Build a Package	35
3. Enhancing the Functionality of a Package	41
Task Map: Creating Information Files and Installation Scripts	41
Creating Information Files	43
Defining Package Dependencies	44
▼ How to Define Package Dependencies	44
Writing a Copyright Message	47
▼ How to Write a Copyright Message	47

	Reserving Additional Space on a Target System	48
▼	How to Reserve Additional Space on a Target System	48
	Creating Installation Scripts	50
	Script Processing During Package Installation	51
	Script Processing During Package Removal	51
	Package Environment Variables Available to Scripts	52
	Obtaining Package Information for a Script	54
	Exit Codes for Scripts	54
	Writing a <code>request</code> Script	55
▼	How to Write a <code>request</code> Script	56
	Gathering Data With the <code>checkinstall</code> Script	57
▼	How to Gather File System Data	58
	Writing Procedure Scripts	60
▼	How to Write Procedure Scripts	61
	Writing Class Action Scripts	62
▼	How to Write Class Action Scripts	68
4.	Verifying and Transferring a Package	71
	Task Map: Verifying and Transferring a Package	71
	Installing Software Packages	72
	The Installation Software Database	73
	Interacting with the <code>pkgadd</code> Command	73
	Installing Packages on Standalones or Servers in a Homogeneous Environment	74
▼	How to Install a Package on a Standalone or Server	74
	Installing Packages for Diskless Clients and AutoClient Systems on a Server	75
▼	How to Add a Package to a Diskless or AutoClient System's Root File System	75
	Verifying the Integrity of a Package	76
▼	How to Verify the Integrity of Your Package	77

Displaying Additional Information About Installed Packages	79
The <code>pkgparam</code> Command	79
▼ How to Obtain Information With the <code>pkgparam</code> Command	79
The <code>pkginfo</code> Command	81
▼ How to Obtain Information With the <code>pkginfo</code> Command	84
Removing a Package	85
▼ How to Remove a Package	85
▼ How to Remove a Package From a Diskless or AutoClient System	86
Transferring a Package to a Distribution Medium	87
▼ How to Transfer Your Package to a Distribution Medium	87
5. Package Creation Case Studies	89
Soliciting Input From the Administrator	89
Techniques	90
Approach	90
Case Study Files	91
Creating a File at Installation and Saving It During Removal	93
Techniques	93
Approach	94
Case Study Files	95
Defining Package Compatibilities and Dependencies	97
Techniques	97
Approach	97
Case Study Files	98
Modifying a File Using Standard Classes and Class Action Scripts	99
Techniques	100
Approach	100
Case Study Files	101
Modifying a File Using the <code>sed</code> Class and a <code>postinstall</code> Script	103

Techniques	103
Approach	103
Case Study Files	104
Modifying a File Using the <code>build</code> Class	105
Techniques	105
Approach	106
Case Study Files	107
Modifying <code>crontab</code> Files During Installation	108
Techniques	108
Approach	108
Case Study Files	109
Installing and Removing a Driver With Procedure Scripts	111
Techniques	111
Approach	111
Case Study Files	112
Installing a Driver Using the <code>sed</code> Class and Procedure Scripts	114
Techniques	114
Approach	115
Case Study Files	116
6. Advanced Package Creation Techniques	121
Specifying the Base Directory	121
The Administrative Defaults File	122
Using the <code>BASEDIR</code> Parameter	123
Using Parametric Base Directories	124
Managing the Base Directory	126
Accommodating Relocation	126
Walking Base Directories	127
Supporting Relocation in a Heterogeneous Environment	135

Traditional Approach	136
Beyond Tradition	140
Making Packages Installable Remotely	146
Example—Installing to a Client	146
Example—Installing to a Server or Standalone	147
Example—Mounting Shared File Systems	148
Patching Packages	148
The <code>checkinstall</code> Script	150
The <code>preinstall</code> Script	154
The Class Action Script	158
The <code>postinstall</code> Script	163
The <code>patch_checkinstall</code> Script	168
The <code>patch_postinstall</code> Script	170
Upgrading Packages	171
The <code>request</code> Script	172
The <code>postinstall</code> Script	173
Glossary	175
Index	179

Preface

The *Application Packaging Developer's Guide* provides step-by-step instructions and relevant background information for designing, building, and verifying packages. This guide also includes information on and examples of advanced techniques that you may find helpful during the package creation process.

Who Should Use This Book

This book is intended for application developers whose responsibilities include designing and building packages.

Though much of the book is directed towards novice package developers, it also contains information useful to more experienced package developers.

Note - The term “x86” refers to the Intel 8086 family of microprocessor chips, including the Pentium and Pentium Pro processors and compatible microprocessor chips made by AMD and Cyrix. In this document the term “x86” refers to the overall platform architecture, whereas “*Intel Platform Edition*” appears in the product name.

How This Book Is Organized

Chapter 1, describes package components, package design criteria, and related commands, files, and scripts.

Chapter 2, describes the process and required tasks for building a package, and provides step-by-step instructions for each task.

Chapter 3, describes how to add optional features to a package, and provides step-by-step instructions for each.

Chapter 4, describes how to verify the integrity of a package and transfer a package to a distribution medium.

Chapter 5, provides case studies for creating packages.

Chapter 6, describes various advanced package creation techniques.

Glossary is a list of words and phrases found in this book and their definitions.

Related Books

The following documentation may provide additional background information on building System V packages.

- *Solaris Porting Guide*
- *System V Application Binary Interface*
- *System V Application Binary Interface - SPARC Processor Supplement*
- *System V Application Binary Interface - Intel386 Processor Supplement*
- *System V Application Binary Interface - MIPS Processor Supplement*
- *System V Application Binary Interface - Motorola 88000 Processor Supplement*

Ordering Sun Documents

The SunDocsSM program provides more than 250 manuals from Sun Microsystems, Inc. If you live in the United States, Canada, Europe, or Japan, you can purchase documentation sets or individual manuals using this program.

For a list of documents and how to order them, see the catalog section of the SunExpressTM Internet site at <http://www.sun.com/sunexpress>.

What Typographic Changes Mean

The following table describes the typographic changes used in this book.

TABLE P-1 Typographic Conventions

Typeface or Symbol	Meaning	Example
AaBbCc123	The names of commands, files, and directories; on-screen computer output	Edit your <code>.login</code> file. Use <code>ls -a</code> to list all files. <code>machine_name%</code> You have mail.
AaBbCc123	What you type, contrasted with on-screen computer output	<code>machine_name%</code> su Password:
<i>AaBbCc123</i>	Command-line placeholder: replace with a real name or value	To delete a file, type <code>rm filename</code> .
<i>AaBbCc123</i>	Book titles, new words or terms, or words to be emphasized	Read Chapter 6 in <i>User's Guide</i> . These are called <i>class</i> options. You <i>must</i> be root to do this.

Shell Prompts in Command Examples

The following table shows the default system prompt and superuser prompt for the C shell, Bourne shell, and Korn shell.

TABLE P-2 Shell Prompts

Shell	Prompt
C shell prompt	machine_name%
C shell superuser prompt	machine_name#
Bourne shell and Korn shell prompt	\$
Bourne shell and Korn shell superuser prompt	#

Designing a Package

Before you build a package, you need to know which files you need to create and the commands you need to execute. You also need to consider your application software's requirements, and the needs of your customer—the administrators who will be installing your package. This chapter discusses the files, commands, and criteria you should know and think about, *before* building a package.

This is a list of the overview information in this chapter.

- “Where to Find Packaging Tasks” on page 1
- “What Are Packages?” on page 2
- “Package Components” on page 2
- “Things to Think About Before Building a Package” on page 5
- “Packaging Commands, Files, and Scripts” on page 7

Where to Find Packaging Tasks

Use these references to find step-by-step instructions for building and verifying packages.

- “Task Map: The Process of Building a Package” on page 11
- “Task Map: Creating Information Files and Installation Scripts” on page 41
- “Task Map: Verifying and Transferring a Package” on page 71

What Are Packages?

Application software is delivered in units called *packages*. A package is a collection of files and directories required for a software product, and is usually designed and built by the application developer after completing the development of the application code. A software product needs to be built into one or more packages so that it can easily be transferred to a distribution medium, be mass produced, and installed by administrators.

Package Components

The components of a package fall into two categories: *package objects*, the application files to be installed, and *control files*, which control how, where, and if the package is installed.

The control files are also divided into two categories: *information files* and *installation scripts*. Some of these control files are required and some are optional.

To package your applications, you must first create the required components, and any optional components, that make up your package. Then you can build the package using the `pkgmk` command.

To build a package, you must provide the following:

- Package objects (the application software files)
- Two required information files (the `pkginfo` and `prototype` files)
- Optional information files and installation scripts

Figure 1-1 describes the contents of a package.

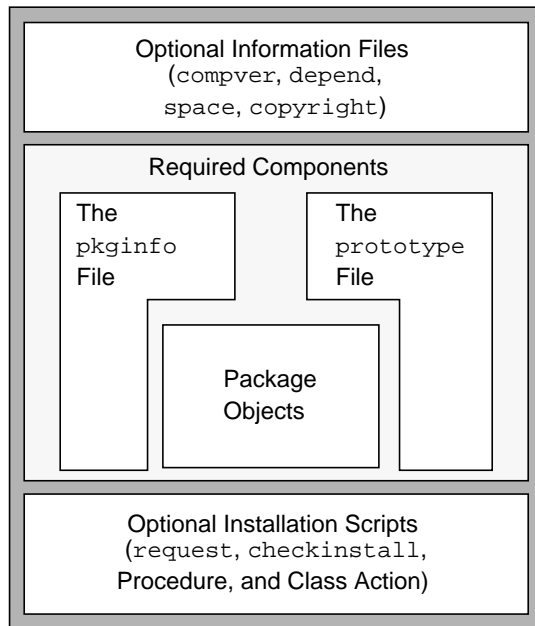


Figure 1-1 The Contents of a Package

Required Package Components

You must create the following components before you build your package:

- Package Objects

These are the components that make up the application. They can be:

- Files (executable or data)
- Directories
- Named pipes
- Links
- Devices

- The `pkginfo` file

The `pkginfo` file is a required package information file defining parameter values such as the package abbreviation, the full package name, and the package architecture. For more information, see “Creating a `pkginfo` File” on page 15 and the `pkginfo(4)` man page.

Note - There are two `pkginfo` man pages. The first is a section 1 command, which displays information about installed packages. The second is a section 4 file, which describes the characteristics of a package. When accessing the man pages, be sure to specify from which section you want the man page. For example:

```
man -s 4 pkginfo
```

- The `prototype` file

The `prototype` file is a required package information file that lists the components of the package. It describes the location, attributes, and file type for each component within a package.

In the `prototype` file, there is one entry for each package object, information file, and installation script. An entry consists of several fields of information describing the object. For more information, see “Creating a `prototype` File” on page 20 and the `prototype(4)` man page.

Optional Package Components

Package Information Files

There are four optional package information files you can include in your package:

- The `compver` file

Defines previous versions of the package that are compatible with this version.

- The `depend` file

Indicates other packages with which this package has special relationships.

- The `space` file

Defines disk space requirements for the target environment, beyond what is needed by the objects defined in the `prototype` file. For example, additional space might be needed for files that are dynamically created at installation time.

- The `copyright` file

Defines the text for a copyright message displayed at the time of package installation.

Each package information file should have an entry in the `prototype` file. See “Creating Information Files” on page 43 for more information on creating these files.

Package Installation Scripts

Installation scripts are not required. However, you can provide scripts that perform customized actions during the installation of your package. An installation script has the following characteristics.

- It is composed of Bourne shell commands.
- Its file permissions should be set to 0644.
- It does not need to contain the shell identifier (`#!/bin/sh`).

The four script types are as follows:

- The `request` script
The `request` script requests input from the administrator installing the package.
- The `checkinstall` script
The `checkinstall` script performs special file system verification.

Note - The `checkinstall` script is only available with the Solaris™ 2.5 and later releases.

- Procedure scripts
Procedure scripts define actions that occur at particular points during package installation and removal. There are four procedure scripts you can create with these predefined names: `preinstall`, `postinstall`, `preremove`, and `postremove`.
- Class Action scripts
Class Action scripts define a set of actions to be performed on a group of objects.
See “Creating Installation Scripts” on page 50 for a more information on installation scripts.

Things to Think About Before Building a Package

Before building a package, you need to decide whether your product is going to be made up of one or more packages. (Note that many small packages take longer to install than one big package.) Although it is a good idea to create a single package, it is not always possible. If you decide to build more than one package, you need to determine how to segment the application code. This section provides a list of criteria to use when planning to build packages.

Many of the good packaging criteria present trade-offs among themselves. It will often be difficult to satisfy all requirements equally. These criteria are presented in

order of importance; however, this sequence is meant to serve as a flexible guide depending on the circumstances. Although each of these criteria is important, it is up to you to optimize these requirements to produce a good set of packages.

For more design ideas, see Chapter 6.

Make Packages Installable Remotely

All packages must be *installable remotely*. Being installable remotely means that the administrator installing your package might be trying to install it on a client system, not necessarily to the root file system where the `pkgadd` command is being executed.

Optimize for Client-Server Configurations

If you are designing a package for a Solaris 2.5 or earlier release, you should consider the various types of system software configurations (for example, standalone, diskless, and server) when laying out packages. Good packaging design divides the affected files to optimize installation of each configuration type. For example, the contents of `root (/)` and `usr` should be segmented so that dataless and server configurations can easily be supported.

Package by Functional Boundaries

Packages should be self-contained and distinctly identified with a set of functionality. For example, a package containing UFS should contain all UFS utilities and be limited to only UFS binaries.

Packages should be organized from a customer's point of view into functional units.

Package Along Royalty Boundaries

Put code that requires royalty payments due to contractual agreements in a dedicated package or group of packages. Do not disperse the code into more packages than necessary.

Package by System Dependencies

Keep system-dependent binaries in dedicated packages. For example, the kernel code should be in a dedicated package with each implementation architecture corresponding to a distinct package instance. This rule also applies to binaries for

different architectures. For example, SPARC™ binaries would be in one package and binaries for an x86 system would be in another.

Eliminate Overlap in Packages

When constructing packages, eliminate duplicate files whenever possible. Unnecessary duplication of files results in support and version difficulties. If your product has multiple packages, repeatedly compare the contents of these packages for redundancies.

Package Along Localization Boundaries

Localization-specific items should be in their own package. An ideal packaging model would have a product's localizations delivered as one package per locale. Unfortunately, in some cases organizational boundaries may conflict with the functional and product boundaries criteria.

International defaults can also be delivered in a package. This would isolate the files necessary for localization changes and standardize delivery format of localization packages.

Packaging Commands, Files, and Scripts

The purpose of this section is to describe the commands, files, and scripts you might use when manipulating packages. They are described in man pages and in detail throughout this book, in relation to the specific task they perform.

Table 1-1 shows the commands available to help you build, verify, install, and obtain information about a package.

TABLE 1-1 Packaging Commands

Function	Command	Description	For More Information, Go To ...
Create packages	pkgproto(1)	Generate a prototype file for input to the pkgmk command	“Creating a prototype File With the pkgproto Command” on page 26
	pkgmk(1)	Create an installable package	“Building a Package” on page 34
Install, remove, and transfer packages	pkgadd(1M)	Install a software package onto a system	“Installing Software Packages” on page 72
	pkgask(1M)	Store answers to a request script	“Design Rules for request Scripts” on page 55
	pkgtrans(1)	Copy packages onto a distribution medium	“Transferring a Package to a Distribution Medium” on page 87
	pkgrm(1M)	Remove a package from a system	“Removing a Package” on page 85
Obtain information about packages	pkgchk(1M)	Check consistency of a software package	“Verifying the Integrity of a Package” on page 76
	pkginfo(1)	Display software package information	“The pkginfo Command” on page 81
	pkgparam(1)	Display package parameter values	“The pkgparam Command” on page 79
Modify installed packages	installf(1M)	Incorporate a new package object into an already installed package	“Design Rules for Procedure Scripts” on page 60 and Chapter 5
	removef(1M)	Remove a package object from an already installed package	“Design Rules for Procedure Scripts” on page 60

Table 1–2 shows the information files available to help you build a package.

TABLE 1–2 Package Information Files

Files	Description	For More Information, Go To ...
admin(4)	Package installation defaults file	“The Administrative Defaults File” on page 122
compver(4)	Package compatibility file	“Defining Package Dependencies” on page 44
copyright(4)	Package copyright information file	“Writing a Copyright Message ” on page 47
depend(4)	Package dependencies file	“Defining Package Dependencies” on page 44
pkginfo(4)	Package characteristics file	“Creating a <code>pkginfo</code> File” on page 15
pkgmap(4)	Package contents description file	“The <code>pkgmap</code> File” on page 34
prototype(4)	Package information file	“Creating a <code>prototype</code> File” on page 20
space(4)	Package disk space requirements file	“Reserving Additional Space on a Target System” on page 48

Table 1–3 describes optional installation scripts that you can write that affect if and how a package is installed.

TABLE 1-3 Package Installation Scripts

Scripts	Description	For More Information, Go To ...
<code>request</code>	Solicit information from the installer.	"Writing a <code>request</code> Script" on page 55
<code>checkinstall</code>	Gather file system data.	"Gathering Data With the <code>checkinstall</code> Script" on page 57
<code>preinstall</code>	Perform any custom installation requirements before class installation.	"Writing Procedure Scripts" on page 60
<code>postinstall</code>	Perform any custom installation requirements after all volumes are installed.	"Writing Procedure Scripts" on page 60
<code>preremove</code>	Perform any custom removal requirements before class removal.	"Writing Procedure Scripts" on page 60
<code>postremove</code>	Perform any custom removal requirements after all classes have been removed.	"Writing Procedure Scripts" on page 60
Class Action	Perform a series of actions on a specific group of objects.	"Writing Class Action Scripts" on page 62

Building a Package

This chapter describes a process, as well as the tasks, on how to build a package. Some of these tasks are required and some are optional. The required tasks are the minimum of what you must do to create a package, and are discussed in detail in this chapter. For information on the optional tasks, which enable you to add more features to your package, see Chapter 3 and Chapter 6.

This is a list of the overview information in this chapter.

- “Task Map: The Process of Building a Package” on page 11
- “Package Environment Variables” on page 13
- “Creating a `pkginfo` File” on page 15
- “Organizing a Package’s Contents” on page 18
- “Creating a `prototype` File” on page 20
- “Building a Package” on page 34

Task Map: The Process of Building a Package

Table 2-1 describes a process for you to follow when building packages, especially if you are inexperienced at building them. Although it is not mandatory for you to complete the first four tasks in the exact order listed, it will make your package building experience easier if you do. Once you are an experienced package designer, you can shuffle the sequence of these tasks to your preference.

As an experienced package designer, you can automate the package building process using the `make` command and makefiles. For more information see the `make(1S)` man page and the *Programming Utilities Guide*.

TABLE 2-1 Task Map: The Process of Building a Package

Task	Description	For Instructions, Go To
Create a <code>pkginfo</code> File	You must create the <code>pkginfo</code> file to describe the characteristics of your package.	"How to Create a <code>pkginfo</code> File" on page 17
Organize Package Contents	You should arrange your package components into a hierarchical directory structure.	"Organizing a Package's Contents" on page 18
Create Information Files	Optional. Define package dependencies, include a copyright message, and reserve additional space on a target system.	Chapter 3
Create Installation Scripts	Optional. Customize the installation and removal processes of a package.	Chapter 3
Create a prototype File	Describe each object in your package in a prototype file.	"Creating a prototype File" on page 20
Build the Package	Build your package using the <code>pkgmk</code> command.	"Building a Package" on page 34
Verify and Transfer the Package	Verify the integrity of a package before copying it to a distribution medium.	Chapter 4

Package Environment Variables

You can use variables in the required information files, `pkginfo` and `prototype`, as well as an option to the `pkgmk` command (which is used to build a package). As each of these files and commands are discussed in this chapter, more context-sensitive information on variables is provided. However, before you begin building your package, you should understand the different types of variables and how they can affect a package's successful creation.

There are two types of variables:

- *Build variables*

Build variables begin with a lowercase letter and are evaluated at *build time* (as the package is being built with the `pkgmk` command).

- *Install variables*

Install variables begin with an uppercase letter and are evaluated at *install time* (as the package is being installed with the `pkgadd` command).

General Rules on Using Environment Variables

In the `pkginfo` file, a variable definition is of the form `PARAM=value`, where the first letter of `PARAM` is an uppercase letter. These variables are evaluated only at install time, and if any cannot be evaluated, the `pkgadd` command will abort with an error.

In the `prototype` file, a variable definition can take the form `!PARAM=value` or `$variable`. Both `PARAM` and `variable` can begin with either an uppercase or lowercase letter; however, only variables whose values are known at build time will be evaluated. This means that if `PARAM` or `variable` is a build or install variable whose value is not known at build time, the `pkgmk` command will abort with an error.

You can also include the option `PARAM=value` as an option to the `pkgmk` command. This option works the same as in the `prototype` file, except that its scope is global to the entire package. The `!PARAM=value` definition in a `prototype` file is local to that file and the part of the package it defines.

If `PARAM` is an install variable, and `variable` is an install or build variable with a known value, the `pkgmk` command inserts the definition into the `pkginfo` file so that it will be available at install time. However, it will not evaluate `PARAM` in any path names specified in the `prototype` file.

Package Environment Variables Summary

Table 2-2 summarizes variable specification formats, location, and scope.

TABLE 2-2 Package Environment Variables Summary

Variable Defined In The ...	Variable Definition Format	Variable Type Being Defined	When The Variable Is Resolved	Where The Variable Is Resolved	The Variable May Be Used As Part Of The ...
pkginfo file	<i>PARAM=value</i>	Build	Ignored at build time	N/A	None
		Install	Install time	In the pkgmap file	<i>owner, group, path, or link target</i>
prototype file	<i>!PARAM=value</i>	Build	Build time	In the prototype file and any included files	<i>mode, owner, group, or path</i>
		Install	Build time	In the prototype file and any included files	<i>!search and !command commands only</i>
pkgmk command line	<i>PARAM=value</i>	Build	Build time	In the prototype file	<i>mode, owner, group, or path</i>
		Install	Build time	In the prototype file	<i>!search command only</i>
			Install time	In the pkgmap file	<i>owner, group, path, or link target</i>

Creating a `pkginfo` File

The `pkginfo` file is an ASCII file that describes the characteristics of a package along with information that helps control the flow of installation.

Each entry in the `pkginfo` file is a line that establishes the value of a parameter using the format `PARAM=value`. `PARAM` can be any of the 19 standard parameters described in the `pkginfo(4)` man page, and there is no required order in which the parameters must be specified.

Note - Each *value* can be enclosed with single or double quotation marks (for example, `'value'` or `"value"`). If *value* contains any characters that are considered special to a shell environment, you should use quotation marks. The examples and case studies in this book do not use quotation marks. See the `pkginfo(4)` man page for an example that uses double quotation marks.

You can also create your own package parameters by assigning a value to them in the `pkginfo` file. Your parameters must begin with a capital letter followed by either uppercase or lowercase letters. An uppercase letter indicates that the parameter (variable) will be evaluated at install time (as opposed to build time). For information on the difference between install and build variables, see “Package Environment Variables” on page 13.

Note - Trailing whitespace after any parameter value is ignored.

There are five parameters that you *must* define in a `pkginfo` file: `PKG`, `NAME`, `ARCH`, `VERSION`, and `CATEGORY`. For information on the remaining parameters, see the `pkginfo(4)` man page.

Defining a Package Instance

The same package can have different versions, be compatible with different architectures, or both. Each variation of a package is known as a *package instance*. A package instance is determined by combining the definitions of the `PKG`, `ARCH`, and `VERSION` parameters in the `pkginfo` file.

The `pkgadd` command assigns a *package identifier* to each package instance at installation time. The package identifier is the package abbreviation with a numerical suffix, for example `SUNWadm.2`. This identifier distinguishes a package instance from any other package, including instances of the same package.

Defining a Package Abbreviation (PKG)

A *package abbreviation* is a short name for a package that is defined via the `PKG` parameter in the `pkginfo` file, and must:

- Be alphanumeric, but the first cannot be numeric.
- Be nine or fewer characters.
- Not be one of the reserved abbreviations `install`, `new`, and `all`.

Note - The first four characters should be unique to your company, such as your company's stock symbol. For example, packages built by Sun Microsystems™ all have "SUNW" as the first four characters of their package abbreviation.

An example package abbreviation entry in a `pkginfo` file might be:

```
PKG=SUNWcadap
```

Specifying a Package Architecture (ARCH)

The `ARCH` parameter in the `pkginfo` file identifies which architectures are associated with the package. The architecture name has a maximum length of 16 alphanumeric characters. If a package is associated with more than one architecture, specify them in a comma-separated list.

For example, a package architecture specification in a `pkginfo` file might be:

```
ARCH=sparc
```

Specifying a Package Version (VERSION)

The `VERSION` parameter in the `pkginfo` file identifies the version of the package. The version has a maximum length of 256 ASCII characters, and cannot begin with a left parenthesis.

An example version specification in a `pkginfo` file might be:

```
VERSION=release 1.0
```

Defining a Package Name (NAME)

A *package name* is the full name of the package, which is defined via the `NAME` parameter in the `pkginfo` file.

Because system administrators often use package names to determine whether or not a package needs to be installed, it is important to write clear, concise, and complete package names. Package names should

- State when a package is needed (for example, to provide certain commands or functionality, or state if it is needed for specific hardware).
- State what the package is used for (for example, the development of device drivers).

- Include a description of the package abbreviation mnemonic, using key words that indicate the abbreviation is a short form of the description (for example, the package name for the package abbreviation SUNWbnuu is “Basic Networking UUCP Utilities, (Usr)”).
- Name the partition into which the package is installed.
- Use terms consistently with their industry meaning.
- Take advantage of the 256 character limit.

An example package name defined in a `pkginfo` file might be:

```
NAME=Chip designers need CAD application software to design
abc chips.  Runs only on xyz hardware and is installed in the
usr partition.
```

Defining a Package Category (CATEGORY)

The `CATEGORY` parameter in the `pkginfo` file specifies in which categories a package belongs. At a minimum, a package must belong to either the `system` or application category. Category names:

- Are alphanumeric.
- Have a maximum length of 16 characters.
- Are case insensitive.

If a package belongs to more than one category, specify them in a comma-separated list.

An example `CATEGORY` specification in a `pkginfo` file might be:

```
CATEGORY=system
```

▼ How to Create a `pkginfo` File

1. **Using your favorite text editor, create a file named `pkginfo`.**

You can create this file anywhere on your system.

2. **Edit the file and define the five required parameters.**

The five required parameters are: `PKG`, `ARCH`, `VERSION`, `NAME`, and `CATEGORY`. For more information on these parameters, see “Creating a `pkginfo` File” on page 15.

3. **Add any other parameters that you like to the file.**

Create your own parameters or see the `pkginfo(4)` man page for information on the 19 standard parameters.

4. Save your changes and quit the editor.

Where to Go Next

If you are ready to go to the next task, see “How to Organize A Package’s Contents” on page 18.

Example—Creating a `pkginfo` File

This example shows the contents of a valid `pkginfo` file, with the five required parameters defined, as well as the `BASEDIR` parameter. The `BASEDIR` parameter is discussed in more detail in “The *path* Field” on page 22.

```
PKG=SUNWcadap
NAME=Chip designers need CAD application software to design abc chips.
Runs only on xyz hardware and is installed in the usr partition.
ARCH=sparc
VERSION=release 1.0
CATEGORY=system
BASEDIR=/opt
```

Organizing a Package’s Contents

Organize your package objects in a hierarchical directory structure that mimics how you want them to be on the target system after installation. If you do this step before you create a `prototype` file, you can save yourself some time and effort when creating that file.

▼ How to Organize A Package’s Contents

1. **Determine how many packages you need to create and determine which package objects shall be located in each package.**

For help in completing this step, see “Things to Think About Before Building a Package” on page 5.


2. **For each package you need to build, make a directory.**

You can create this directory anywhere on your system and name it anything you like. The examples in this chapter assume that a package directory has the same name as the package abbreviation.

```
$ cd /home/jane
$ mkdir SUNWcadap
```

3. For each package, organize package objects into a directory structure beneath their corresponding package directory, which mimics how they will be located on the target system.

For example, the CAD application package, `SUNWcadap`, requires the following directory structure.

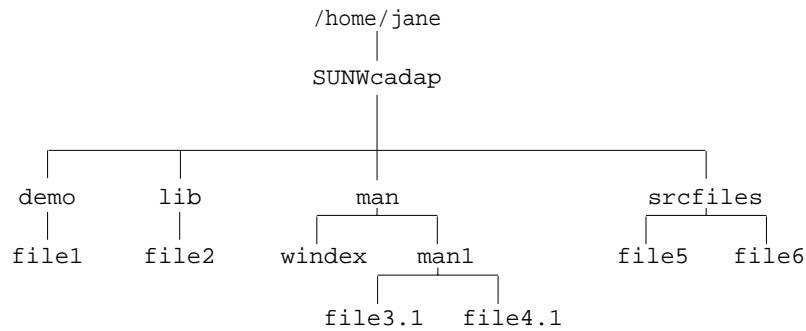

4. Decide where you will keep your information files and, if appropriate, make a directory to keep them in one location.

This example assumes that the example `pkginfo` file from “How to Create a `pkginfo` File” on page 17 was created in Jane’s home directory.

```
$ cd /home/jane
$ mkdir InfoFiles
$ mv pkginfo InfoFiles
```

Where to Go Next

If you are ready to go to the next task, see “How to Create a prototype File Using the `pkgproto` Command” on page 32.

Creating a prototype File

The `prototype` file is an ASCII file used to specify information about the objects in a package. Each entry in the `prototype` file describes a single object, such as a data file, directory, source file, or executable object. Entries in a `prototype` file consist of several fields of information separated by white space. Note that the fields *must* appear in a specific order. Comment lines begin with a pound sign (#) and are ignored.

You can create a `prototype` file with a text editor or by using the `pkgproto` command. When you first create this file, it is probably easier to do so with the `pkgproto` command, because it creates the file based on the directory hierarchy you created previously. If you have not organized your files as described in “Organizing a Package’s Contents” on page 18, you have the cumbersome task of creating the `prototype` file from scratch with your favorite text editor. However, even when you create the `prototype` file using the `pkgproto` command, you will most likely need to make modifications to the file with your favorite text editor, so it is important to understand the format and contents of this file.

The Format of the prototype File

The format for each line in the `prototype` file is:

<code>part</code>	<code>ftype</code>	<code>class</code>	<code>path</code>	<code>major</code>	<code>minor</code>	<code>mode</code>	<code>owner</code>	<code>group</code>
-------------------	--------------------	--------------------	-------------------	--------------------	--------------------	-------------------	--------------------	--------------------

For each object,

<i>part</i>	Is an optional, numeric field that enables you to group package objects into parts. The default value is part 1.
<i>ftype</i>	Is a one-character field that specifies the object’s type. See “The <i>ftype</i> Field” on page 21.
<i>class</i>	Is the installation class to which the object belongs. See “The <i>class</i> Field” on page 22.
<i>path</i>	Is the absolute or relative path name indicating where the package object will reside on the target system. See “The <i>path</i> Field” on page 22.
<i>major</i>	Is the major device number for block or character special devices.

<i>minor</i>	Is the minor device number for block or character special devices.
<i>mode</i>	Is the octal mode of the object (for example, 0644). See “The <i>mode</i> Field” on page 25.
<i>owner</i>	Is the owner of the object (for example, <code>bin</code> or <code>root</code>). See “The <i>owner</i> Field” on page 25.
<i>group</i>	Is the group to which the object belongs (for example, <code>bin</code> or <code>sys</code>). See “The <i>group</i> Field” on page 26.

Usually, only the *ftype*, *class*, *path*, *mode*, *owner*, and *group* fields are defined, and are described in the following sections. For additional information on these fields, see the `prototype(4)` man page.

The ftype Field

The *ftype*, or file type, field is a one-character field that specifies a package object’s type. Valid file types are described in Table 2–3.

TABLE 2–3 Valid File Types in the `prototype` File

Use <i>ftype</i> ...	To Define A ...
<code>f</code>	Standard executable or data file
<code>e</code>	File to be edited upon installation or removal (may be shared by several packages)
<code>v</code>	Volatile file (whose contents are expected to change, like a log file)
<code>d</code>	Directory
<code>x</code>	Exclusive directory accessible only by this package (may contain unregistered logs or database information)
<code>l</code>	Linked file
<code>p</code>	Named pipe
<code>c</code>	Character special device
<code>b</code>	Block special device

TABLE 2-3 Valid File Types in the `prototype` File (continued)

Use <i>f</i> type ...	To Define A ...
i	Information file or installation script
s	Symbolic link

The *class* Field

The *class* field names the class to which an object belongs. Using classes is an optional package design feature, and is discussed in detail in “Writing Class Action Scripts” on page 62.

If you do not use classes, an object belongs to the `none` class, and when you execute the `pkgmk` command to build your package, it will insert the `CLASSES=none` parameter in the `pkginfo` file for you. Files with file type `i` should leave the *class* field blank.

The *path* Field

The *path* field is used to define where the package object will reside on the target system. You may indicate the location with either an absolute path name (for example, `/usr/bin/mail`) or a relative path name (for example, `bin/mail`). Using an absolute path name means that the object’s location on the target system is defined by the package and cannot be changed. Package objects with relative path names indicate that the object is *relocatable*.

A *relocatable object* is one that does not need an absolute path location on the target system. Instead, its location is determined during the installation process.

All or some of a package’s objects can be defined as relocatable. You should decide if package objects will have fixed locations (such as start-up scripts in `/etc`) or be relocatable before you write any installation scripts and before you create the `prototype` file.

There are two kinds of relocatable objects, *collectively relocatable* and *individually relocatable*.

Collectively Relocatable Objects

Collectively relocatable objects are located relative to a common installation base called the *base directory*. A base directory is defined in the `pkginfo` file, using the `BASEDIR` parameter. For example, a relocatable object in the `prototype` file named

tests/generic requires that the pkginfo file define the default BASEDIR parameter. For example:

```
BASEDIR=/opt
```

This means that when the object is installed, it will be located in /opt/tests/generic.

Note - /opt is the *only* directory to which software that is not part of base Solaris may be delivered.

Use collectively relocatable objects whenever possible. In general, the major part of a package can be relocatable with a few files (such as those in /etc or /var) specified as absolute. However, if a package contains many different relocations, consider dividing your package into multiple packages, each with a different BASEDIR value in its pkginfo file.

Individually Relocatable Objects

Individually relocatable objects are not restricted to the same directory location as collectively relocatable objects. To define an individually relocatable object, you need to specify an install variable in the *path* field in the *prototype* file, and then create a *request* script to prompt the installer for the relocatable base directory, or a *checkinstall* script to determine the path name from file system data. For more information on *request* scripts, see “Writing a request Script” on page 55 and for information on *checkinstall* scripts, see “How to Gather File System Data” on page 58.

Note - Individually relocatable objects are difficult to manage and should be avoided. This is because they could result in widely scattered package components that may be difficult to isolate when installing multiple versions or architectures of the package. Try to use collectively relocatable objects whenever possible.

Parametric Path Names

A *parametric path name* is a path name that includes a variable specification. For example, /opt/\$PKGINST/*filename* is a parametric path name because of the \$PKGINST variable specification. A default value for the variable specification *must* be defined in the pkginfo file. The value may then be changed by a *request* or *checkinstall* script.

A variable specification in a path must begin or end the path name, or be bounded by slashes (/). For example, valid parametric path names look like:

```
$PARAM/tests
tests/$PARAM/generic
/tests/$PARAM
```

The variable specification, once defined, may cause the path to be evaluated as absolute or relocatable. For example, given this entry in a `prototype` file:

```
f none $DIRLOC/tests/generic
```

and this entry in the `pkginfo` file:

```
DIRLOC=/myopt
```

the path name, `$DIRLOC/tests/generic`, will evaluate to the *absolute* path name `/myopt/tests/generic`, regardless of whether the `BASEDIR` parameter is set in the `pkginfo` file.

However, if the `pkginfo` file contains these entries

```
DIRLOC=firstcut
BASEDIR=/opt
```

then the path name, `$DIRLOC/tests/generic`, will evaluate to the *relocatable* path name `/opt/firstcut/tests/generic`.

For more information on parametric path names, see “Using Parametric Base Directories” on page 124.

A Brief Word on an Object's Source and Destination Locations

The path name field in the `prototype` file defines where the object will be located on the target system. However, if you did not organize your package's objects on your system in a directory structure that mimics their location on the target system (see “Organizing a Package's Contents” on page 18), then you also need to specify their present location in the `prototype` file.

If your development area is not structured in the same way that you want your package structured, you can use the *path1=path2* format in the *path* field, where *path1* is the location it should have on the target system, and *path2* is the location it has on your system.

You can also use the *path1=path2* path name format with *path1* as a relocatable object name and *path2* a full path name to that object on your system.

Note - *path1* may not contain undefined build variables, but may contain undefined install variables. *path2* may not contain any undefined variables, although both build and install variables may be used. For information on the difference between install and build variables, see “Package Environment Variables” on page 13.

Links must use the *path1= path2* format since they are created by the `pkgadd` command. As a general rule, *path2* of a link should never be absolute, but should instead be relative to the directory portion of *path1*.

An option to using the *path1=path2* format is to use the `!search` command. For more information, see “Providing a Search Path for the `pkgmk` Command” on page 31.

The *mode* Field

The *mode* field may contain an octal number, a question mark (?), or a variable specification. An octal number specifies the mode of the object when it is installed on the target system. A ? means that the mode will be unchanged as the object is installed, implying that the object of the same name already exists on the target system.

A variable specification of the form `$mode`, where the first letter of the variable must be a lowercase letter, means that this field will be set as the package is built. Note that this variable must be defined at build time in either the `prototype` file or as an option to the `pkgmk` command. For information on the difference between install and build variables, see “Package Environment Variables” on page 13.

Files with file type `i` (information file), `l` (hard link), and `s` (symbolic link), should leave this field blank.

The *owner* Field

The *owner* field may contain a user name, a question mark (?), or a variable specification. A user name has a maximum of 14 characters and should be a name that already exists on the target system (such as, `bin` or `root`). A ? means that the owner will be unchanged as the object is installed, implying that the object of the same name already exists on the target system.

A variable specification can be of the form `$Owner` or `$owner`, where the first letter of the variable is either an uppercase letter or a lowercase letter. If the variable begins with a lowercase letter, it must be defined as the package is built, either in the `prototype` file or as an option to the `pkgmk` command. If the variable begins with an uppercase letter, the variable specification will be inserted into the `pkginfo` file as a default value, and may be redefined at install time via a `request` script. For information on the difference between install and build variables, see “Package Environment Variables” on page 13.

Files with file type `i` (information file) and `l` (hard link) should leave this field blank.

The *group* Field

The *group* field may contain a group name, a question mark (?), or a variable specification. A group name has a maximum of 14 characters and should be a name that already exists on the target system (such as `bin` or `sys`). A ? means that the group will be unchanged as the object is installed, implying that the object of the same name already exists on the target system.

A variable specification can be of the form `$Group` or `$group`, where the first letter of the variable is either an uppercase letter or a lowercase letter. If the variable begins with a lowercase letter, it must be defined as the package is built, either in the prototype file or as an option to the `pkgmk` command. If the variable begins with an uppercase letter, the variable specification will be inserted into the `pkginfo` file as a default value, and may be redefined at install time via a `request` script. For information on the difference between install and build variables, see “Package Environment Variables” on page 13.

Files with file type `i` (information file) and `l` (hard link) should leave this field blank.

Creating a prototype File From Scratch

If you want to create a `prototype` file from scratch, you can do so with your favorite text editor, adding one entry per package object. See “The Format of the prototype File” on page 20 and the `prototype(4)` man page for more information on the format of the file. However, after you have defined each package object, you might want to include some of the features described in “Adding Functionality to a prototype File” on page 29.

Creating a prototype File With the `pkgproto` Command

You can use the `pkgproto` command to build a basic `prototype` file, as long as you have organized your package directory structure as described in “Organizing a Package’s Contents” on page 18. For example, using the sample directory structure and `pkginfo` file described in previous sections, the commands for creating the `prototype` file are:

```
$ cd /home/jane
$ pkgproto ./SUNWcadap > InfoFiles/prototype
```

The prototype file looks like:

```
d none SUNWcadap 0755 jane staff
d none SUNWcadap/demo 0755 jane staff
f none SUNWcadap/demo/file1 0555 jane staff
d none SUNWcadap/srcfiles 0755 jane staff
f none SUNWcadap/srcfiles/file5 0555 jane staff
f none SUNWcadap/srcfiles/file6 0555 jane staff
d none SUNWcadap/lib 0755 jane staff
f none SUNWcadap/lib/file2 0644 jane staff
d none SUNWcadap/man 0755 jane staff
f none SUNWcadap/man/windex 0644 jane staff
d none SUNWcadap/man/man1 0755 jane staff
f none SUNWcadap/man/man1/file4.1 0444 jane staff
f none SUNWcadap/man/man1/file3.1 0444 jane staff
```

Note - The actual owner and group of the person building the package is recorded by the `pkgproto` command. A good technique is to use the `chown -R` and the `chgrp -R` commands, setting the owner and group as intended *before* running the `pkgproto` command.

This prototype file is not yet complete. See “Fine-Tuning a prototype File Created With the `pkgproto` Command” on page 27 for information on completing this file.

Fine-Tuning a prototype File Created With the `pkgproto` Command

Although the `pkgproto` command is useful in creating an initial prototype file, it does not create entries for every package object that needs to be defined, or make complete entries. The `pkgproto` command does not:

- Create complete entries for objects with file types `v` (volatile files), `e` (editable files), `x` (exclusive directories), or `i` (information files or installation scripts).
- Support multiple classes with a single invocation.

Therefore, you probably need to modify the prototype file to include at least some of these object definitions, possibly redefine path names and other field settings, and include some of the features described in “Adding Functionality to a prototype File” on page 29.

Creating Object Entries With File Types v, e, x, and i

At the very least, you need to modify the `prototype` file to add objects with file type `i`. If you stored your information files and installation scripts in the first level of your package directory (for example, `/home/jane/SUNWcadap/pkginfo`), then an entry in the `prototype` file would look like:

```
i pkginfo
```

If you did not store your information files and installation scripts in the first level of your package directory, then you need to specify their source location. For example:

```
i pkginfo=/home/jane/InfoFiles/pkginfo
```

Or, you can use the `!search` command to specify the location for the `pkgmk` command to look when building the package. See “Providing a Search Path for the `pkgmk` Command” on page 31 for more information.

To add entries for objects with file types `v`, `e`, and `x`, follow the format described in “The Format of the `prototype` File” on page 20, or refer to the `prototype(4)` man page.

Note - Remember to always assign a class to files with a file type of `e` (editable) and have an associated class action script for that class. Otherwise, the files will be removed during package removal, even if the path name is shared with other packages.

Using Multiple Class Definitions

If you use the `pkgproto` command to create your basic `prototype` file, you can assign all of the package objects to the `none` class or one, specific class. As shown in “Creating a `prototype` File With the `pkgproto` Command” on page 26, the basic `pkgproto` command assigns all objects to the `none` class. To assign all objects to a specific class, you can use the `-c` option. For example:

```
$ pkgproto -c classname /home/jane/SUNWcadap > /home/jane/InfoFiles/prototype
```

If you use multiple classes, you may need to manually edit the `prototype` file and modify the `class` field for each object. If you use classes, you also need to define the `CLASSES` parameter in the `pkginfo` file and write class action scripts. As mentioned previously, using classes is an optional feature and is discussed in detail in “Writing Class Action Scripts” on page 62.

Example—Fine-Tuning a prototype File Created Using the pkgproto Command

Given the prototype file created by the pkgproto command in “Creating a prototype File With the pkgproto Command” on page 26, there are several modifications that need to be made.

- There needs to be an entry for the pkginfo file.
- The *path* fields need to be modified to be the *path1=path2* format, since the package source is in /home/jane. (Since the package source is a hierarchical directory, and the !search command does not search recursively, it may be easier to use the *path1=path2* format.)
- The *owner* and *group* fields should contain the names of existing users and groups on the target system. That is, the owner jane will result in an error since this owner is not part of the SunOS™ operating system.

The modified prototype file looks like:

```
i pkginfo=/home/jane/InfoFiles/pkginfo
d none SUNWcadap=/home/jane/SUNWcadap 0755 root sys
d none SUNWcadap/demo=/home/jane/SUNWcadap/demo 0755 root bin
f none SUNWcadap/demo/file1=/home/jane/SUNWcadap/demo/file1 0555 root bin
d none SUNWcadap/srcfiles=/home/jane/SUNWcadap/srcfiles 0755 root bin
f none SUNWcadap/srcfiles/file5=/home/jane/SUNWcadap/srcfiles/file5 0555 root bin
f none SUNWcadap/srcfiles/file6=/home/jane/SUNWcadap/srcfiles/file6 0555 root bin
d none SUNWcadap/lib=/home/jane/SUNWcadap/lib 0755 root bin
f none SUNWcadap/lib/file2=/home/jane/SUNWcadap/lib/file2 0644 root bin
d none SUNWcadap/man=/home/jane/SUNWcadap/man 0755 bin bin
f none SUNWcadap/man/windex=/home/jane/SUNWcadap/man/windex 0644 root other
d none SUNWcadap/man/man1=/home/jane/SUNWcadap/man/man1 0755 bin bin
f none SUNWcadap/man/man1/file4.1=/home/jane/SUNWcadap/man/man1/file4.1 0444 bin bin
f none SUNWcadap/man/man1/file3.1=/home/jane/SUNWcadap/man/man1/file3.1 0444 bin bin
```

Adding Functionality to a prototype File

Besides defining every package object in the prototype file, you can also:

- Define additional objects to be created at install time.
- Create links at install time.
- Distribute packages over multiple volumes.
- Nest prototype files.
- Set a default value for the *mode*, *owner*, and *group* fields.
- Provide a search path for the pkgmk command.
- Set environment variables.

See the following sections for information on making these changes.

Defining Additional Objects to Be Created at Install Time

You can use the `prototype` file to define objects that are not actually delivered on the installation medium. During installation, using the `pkgadd` command, these objects are created with the required file types, if they do not already exist at the time of installation.

To specify that an object be created on the target system, add an entry for it in the `prototype` file with the appropriate file type.

For example, if you want a directory created on the target system, but do not want to deliver it on the installation medium, make the following entry for the directory in the `prototype` file:

```
d none /directory 0644 root other
```

If you want to create an empty file on the target system, an entry for the file in the `prototype` file might look like:

```
f none filename=/dev/null 0644 bin bin
```

The only objects that *must* be delivered on the installation medium are regular files and edit scripts (file types `e`, `v`, `f`) and the directories required to contain them. Any additional objects are created without reference to the delivered objects, directories, named pipes, devices, hard links, and symbolic links.

Creating Links at Install Time

To create links during package installation, define the following in the `prototype` file entry for the linked object:

- Its file type as `l` (a link) or `s` (a symbolic link).
- Its path name with the format `path1=path2` where `path1` is the destination and `path2` is the source file. As a general rule, `path2` of a link should never be absolute, but should instead be relative to the directory portion of `path1`. For example, a `prototype` file entry defining a symbolic link could be:

```
s none etc/mount=../usr/etc/mount
```

Relative links would be specified in this manner whether the package is installed as absolute or relocatable.

Distributing Packages Over Multiple Volumes

When you build your package with the `pkgmk` command, it performs the calculations and actions necessary to organize a multiple volume package. A multiple volume package is called a *segmented* package.

However, you can use the optional *part* field in the `prototype` file to define in which part you want an object to be located. A number in this field overrides the `pkgmk` command and forces the placement of the component into the part given in the field. Note that there is a one-to-one correspondence between parts and volumes for removable media formatted as file systems. If the volumes are preassigned by the developer, the `pkgmk` command will issue an error if there is insufficient space on any volume.

Nesting prototype Files

You can create multiple `prototype` files and then include them, using the `!include` command in the `prototype` file. You might want to do this for easier maintenance.

In the following example there are three `prototype` files, the main one (`prototype`) being edited, and the two (`proto2` and `proto3`) that are being included.

```
!include /source-dir/proto2
!include /source-dir/proto3
```

Setting Default Values for the mode, owner, and group Fields

To set default values for the *mode*, *owner*, and *group* fields for specific package objects, you can insert the `!default` command into the `prototype` file. For example,

```
!default 0644 root other
```

Note - This command's range starts from where it is inserted and extends to the end of the file, but does not span to included files.

However, for directories (file type `d`) and editable files (file type `e`) that you know exist on target systems (like `/usr` or `/etc/vfstab`), make sure that the *mode*, *owner*, and *group* fields in the `prototype` file are set to question marks (`?`). That way you will not destroy existing settings that a site administrator may have modified.

Providing a Search Path for the pkgmk Command

If the source location for package objects is different than their destination location, and you do not want to use the *path1=path2* format as described in “A Brief Word on an Object’s Source and Destination Locations” on page 24, then you can use the `!search` command in the `prototype` file. For example, if you created a directory, `pkgfiles`, in your home directory, and it contains all of your information files and installation scripts, you can specify that that directory be searched when the package is built with the `pkgmk` command.

The command in the prototype file would look like:

```
!search /home-dir/pkgfiles
```

Note - Search requests do not span to included files. In addition, a search is limited to the specific directories listed, and will *not* search recursively.

Set Environment Variables

You can also add commands to the `prototype` file of the form `!PARAM=value`. Commands of this form define variables in the current environment. If you have multiple `prototype` files, the scope of this command is local to the `prototype` file where it is defined.

The variable `PARAM` can begin with either a lowercase or uppercase letter, but its value must be known at build time, or the `pkgmk` command will abort with an error. For more information on the difference between build and install variables, see “Package Environment Variables” on page 13.

▼ How to Create a prototype File Using the `pkgproto` Command

Note - It is easier to create information files and installation scripts before creating a `prototype` file. However, this is not required, and you can always edit the `prototype` file after changing your package contents. For more information on information files and installation scripts, see Chapter 3.

- 1. Determine which package objects will be absolute and which will be relocatable, if not done already.**

For information that will help you complete this task, see “The `path` Field” on page 22.

- 2. Organize your package’s objects to mimic their location on the target system.**

If you already organized your packages as described in “Organizing a Package’s Contents” on page 18, note that you may need to make some changes based on your decisions in Step 1 on page 32. If you have not organized your package yet, you should do so now (otherwise you cannot use the `pkgproto` command to create a basic `prototype` file).

- 3. If your package has collectively relocatable objects, edit the `pkginfo` file to set the `BASEDIR` parameter to the appropriate value.**

For example,

```
BASEDIR=/opt
```

For information on collectively relocatable objects, see “Collectively Relocatable Objects” on page 22.

4. **If your package has individually relocatable objects, create a `request` script to prompt the installer for the appropriate path name or a `checkinstall` script to determine the appropriate path from file system data.**

For information on creating a `request` script, see “How to Write a request Script” on page 56. For information on creating a `checkinstall` script, see “How to Gather File System Data” on page 58. For information on individually relocatable objects, see “Individually Relocatable Objects” on page 23.

5. **Change the owner and group on all of your package components to be the intended owner and group on the target systems.**

Use the `chown -R` and the `chgrp -R` commands on your package directory and information files directory.

6. **Execute the `pkgproto` command to create a basic prototype file.**

The `pkgproto` command scans your directories to create a basic file. For example,

```
$ cd package-directory
$ pkgproto ./package-directory > prototype
```

Like the `pkginfo` file, the `prototype` file can be located anywhere on your system. However, it might be a good idea to keep your information files and installation scripts in one place, for easy access and maintenance. For additional information on the `pkgproto` command, see the `pkgproto(1)` man page.

7. **Edit the `prototype` file using your favorite text editor, and add entries for files of type `v`, `e`, `x`, and `i`.**

For information on the specific changes you may need to make, see “Fine-Tuning a prototype File Created With the `pkgproto` Command” on page 27.

8. **Optional. If you are using multiple classes, edit the `prototype` and `pkginfo` files using your favorite text editor to make the necessary changes, and create corresponding class action scripts.**

For information on the specific changes you may need to make, see “Fine-Tuning a prototype File Created With the `pkgproto` Command” on page 27 and “Writing Class Action Scripts” on page 62.

9. **Edit the `prototype` file using your favorite text editor to redefine path names and change other field settings.**

For more information, see “Fine-Tuning a `prototype` File Created With the `pkgproto` Command” on page 27.

10. **Optional. Edit the `prototype` file using your favorite text editor to add functionality to your `prototype` file.**

For more information, see “Adding Functionality to a `prototype` File” on page 29.

11. **Save your changes and quit the editor.**

Where to Go Next

If you are ready to go to the next task, see “How to Build a Package” on page 35.

Building a Package

Use the `pkgmk` command to build your package. This command takes all of the objects defined in the `prototype` file, puts them into directory format, creates the `pkgmap` file (replacing the `prototype` file), and produces an installable package to be used as input to the `pkgadd` command.

Using the Simplest `pkgmk` Command

The simplest form of this command is the `pkgmk` command itself, without any options. Before using the `pkgmk` command without options, make sure your current working directory contains the package’s `prototype` file. The output of the command, files and directories, are written to the `/var/spool/pkg` directory.

The `pkgmap` File

When you build a package with the `pkgmk` command, it creates a `pkgmap` file that replaces the `prototype` file. The `pkgmap` file from the previous example looks like:

```
$ more pkgmap
: 1 3170
```

(continued)

```

1 d none SUNWcadap 0755 root sys
1 d none SUNWcadap/demo 0755 root bin
1 f none SUNWcadap/demo/file1 0555 root bin 14868 45617 837527496
1 d none SUNWcadap/lib 0755 root bin
1 f none SUNWcadap/lib/file2 0644 root bin 1551792 62372 837527499
1 d none SUNWcadap/man 0755 bin bin
1 d none SUNWcadap/man/man1 0755 bin bin
1 f none SUNWcadap/man/man1/file3.1 0444 bin bin 3700 42989 837527500
1 f none SUNWcadap/man/man1/file4.1 0444 bin bin 1338 44010 837527499
1 f none SUNWcadap/man/windex 0644 root other 157 13275 837527499
1 d none SUNWcadap/srcfiles 0755 root bin
1 f none SUNWcadap/srcfiles/file5 0555 root bin 12208 20280 837527497
1 f none SUNWcadap/srcfiles/file6 0555 root bin 12256 63236 837527497
1 i pkginfo 140 10941 837531104
$

```

The format of this file is very similar to that of the `prototype` file. However, the `pkgmap` file includes the following information.

- The first line indicates the number of volumes that the package spans, and the approximate size the package will be when installed.

For example, `: 1 3170` indicates that the package spans one volume and will use approximately 3170 512-byte blocks when it is installed.
- There are three additional fields defining the size, checksum, and modification time for each package object.
- The package objects are listed in alphabetical order by class and by path name to enhance the time it takes to install the package.

▼ How to Build a Package

1. Create a `pkginfo` file, if not done already.

For step-by-step instructions, see “How to Create a `pkginfo` File” on page 17.

2. Create a `prototype` file, if not done already.

For step-by-step instructions, see “How to Create a `prototype` File Using the `pkgproto` Command” on page 32.

3. Make your current working directory the same directory that contains your package’s `prototype` file.

4. Build the package.

```
pkgmk [-o] [-a arch] [-b base-src-dir] [-d device]
      [-f filename] [-l limit] [-p pstamp] [-r rootpath]
      [-v version] [PARAM=value] [pkginst]
```

<code>-o</code>	Overwrites the existing version of the package.
<code>-a arch</code>	Overrides the architecture information in the <code>pkginfo</code> file.
<code>-b base-src-dir</code>	Requests that <i>base-src-dir</i> be added to the beginning of relocatable path names when the <code>pkgmk</code> command is searching for objects on the development system.
<code>-d device</code>	Specifies that the package should be copied onto <i>device</i> , which may be an absolute directory path name, diskette, or removable disk.
<code>-f filename</code>	Names a file, <i>filename</i> , that is used as your prototype file. The default names are <code>prototype</code> or <code>Prototype</code> .
<code>-l limit</code>	Specifies the maximum size, in 512-byte blocks, of the output device.
<code>-p pstamp</code>	Overrides the production stamp definition in the <code>pkginfo</code> file.
<code>-r rootpath</code>	Requests that the root directory <i>rootpath</i> be used to locate objects on the development system.
<code>-v version</code>	Overrides the version information in the <code>pkginfo</code> file.
<code>PARAM=value</code>	Sets global environment variables. Variables beginning with lowercase letters are resolved at build time. Those beginning with uppercase letters are placed into the <code>pkginfo</code> file for use at install time.
<code>pkginst</code>	Specifies a package by its package abbreviation or a specific instance (for example, <code>SUNWcadap.4</code>)

For more information, see the `pkgmk(1)` man page.

5. Verify the contents of the package.


```
$ pkgchk -d pkg-dir pkg-abbrev
Checking uninstalled directory format package pkg-abbrev
from pkg-dir
## Checking control scripts.
## Checking package objects.
## Checking is complete.
$
```

`-d device-name` Specifies the location of the package. Note that *device-name* can be a full directory path name or the identifiers for a tape, floppy disk, or removable disk.

pkgid Is the name of one or more packages (separated by spaces) to be checked. If omitted, `pkgchk` checks all available packages.

The `pkgchk` command prints what aspects of the package are being checked and displays warnings or errors, as appropriate. For more information on the `pkgchk` command, see “Verifying the Integrity of a Package” on page 76.”

Note - Errors should be considered very seriously; it may mean that a script needs fixing. However, a warning may just be a comment on the style of a script. Check it and move on if you disagree with the output from the `pkgchk` command.

Where to Go Next

If you want to add any optional information files and installation scripts to your package, see Chapter 3. Otherwise, after you build the package, you should verify its integrity. Chapter 4 explains how to do this, and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Example—Building a Package

This example uses the `prototype` file created in “Fine-Tuning a prototype File Created With the `pkgproto` Command” on page 27.

```
$ cd /home/jane/InfoFiles
$ pkgmk
## Building pkgmap from package prototype file.
## Processing pkginfo file.
WARNING: parameter set to "system960716093144"
WARNING: parameter set to "none"
```

```

## Attempting to volumize 13 entries in pkgmap.
part 1 -- 3170 blocks, 17 entries
## Packaging one part.
/var/spool/pkg/SUNWcadap/pkgmap
/var/spool/pkg/SUNWcadap/pkginfo
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/demo/file1
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/lib/file2
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/man/man1/file3.1
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/man/man1/file4.1
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/man/windex
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/srcfiles/file5
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/srcfiles/file6
## Validating control scripts.
## Packaging complete.
$

```

Example—Specifying a Source Directory for Relocatable Files

If your package contains relocatable files, you can use the `-b base-src-dir` option to the `pkgmk` command to specify a path name to be added to the beginning of the relocatable path names while the package is being created. This is useful if you haven't used the `path1=path2` format for relocatable files or specified a search path with the `!search` command in the prototype file.

For example, to build a package using the sample prototype file created by the `pkgproto` command (see “Creating a prototype File With the `pkgproto` Command” on page 26), without modifying the `path` fields, and just adding an entry for the `pkginfo` file, the `pkgmk` command is:

```

$ cd /home/jane/InfoFiles
$ pkgmk -o -b /home/jane
## Building pkgmap from package prototype file.
## Processing pkginfo file.
WARNING: parameter set to "system960716102636"
WARNING: parameter set to "none"
## Attempting to volumize 13 entries in pkgmap.
part 1 -- 3170 blocks, 17 entries
## Packaging one part.
/var/spool/pkg/SUNWcadap/pkgmap
/var/spool/pkg/SUNWcadap/pkginfo
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/demo/file1
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/lib/file2
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/man/man1/file3.1
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/man/man1/file4.1
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/man/windex
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/srcfiles/file5
/var/spool/pkg/SUNWcadap/reloc/SUNWcadap/srcfiles/file6
## Validating control scripts.

```

(continued)

```
## Packaging complete.
```

In this example, the package is built in the default directory, `/var/spool/pkg`, by specifying the `-o` option (to overwrite the package we created in “Example—Building a Package” on page 37).

Example—Specifying Different Source Directories for Information Files and Package Objects

If you put package information files (such as `pkginfo` and `prototype`) and the package objects in two different directories, you can create your package by using the `-b` *base-src-dir* and `-r` *rootpath* options to the `pkgmk` command. If you have your package objects in a directory called `/product/pkgbin` and the other package information files in a directory called `/product/pkgsrc`, you could use the following command to place the package in the `/var/spool/pkg` directory:

```
$ pkgmk -b /product/pkgbin -r /product/pkgsrc -f /product/pkgsrc/prototype
```

Optionally, you could use this command to do the same:

```
$ cd /product/pkgsrc
$ pkgmk -o -b /product/pkgbin
```

In this example, the `pkgmk` command uses the current working directory to find the remaining parts of the package (like the `prototype` and `pkginfo` information files).

Enhancing the Functionality of a Package

This chapter describes how to create optional information files and installation scripts for a package. While Chapter 2 discussed the minimum requirements for making a package, this chapter discusses additional functionality that you can build into a package, based on the criteria you considered when planning how to design your package (for more information, see “Things to Think About Before Building a Package” on page 5).

This is a list of the overview information in this chapter.

- “Task Map: Creating Information Files and Installation Scripts” on page 41
- “Creating Information Files” on page 43
- “Creating Installation Scripts” on page 50

Task Map: Creating Information Files and Installation Scripts

Table 3-1 lists and describes the optional features you can build into a package.

TABLE 3-1 Task Map: Creating Information Files and Installation Scripts

Task	Description	For Instructions, Go To
Create Information Files	<i>Define Package Dependencies.</i> A definition of package dependencies allows you to specify whether your package is compatible with previous versions, dependent on other packages, or whether other packages are dependent on yours.	"How to Define Package Dependencies" on page 44
	<i>Provide a Copyright Message.</i> A <code>copyright</code> file provides legal protection for your software application.	"How to Write a Copyright Message" on page 47
	<i>Create Additional Space on the Target System.</i> A <code>space</code> file sets aside blocks on the target system, which enables you to create files during installation that are not defined in the <code>pkgmap</code> file.	"How to Reserve Additional Space on a Target System" on page 48

TABLE 3–1 Task Map: Creating Information Files and Installation Scripts *(continued)*

Task	Description	For Instructions, Go To
Create Installation Scripts	<i>Obtain Information From the Installer.</i> A <code>request</code> script enables you to obtain information from the person installing your package.	“How to Write a <code>request</code> Script” on page 56
	<i>Gather File System Data Needed For Installation.</i> A <code>checkinstall</code> script enables you to perform an analysis of the target system and set up the correct environment for, or cleanly halt, the installation.	“How to Gather File System Data” on page 58
	<i>Write Procedure Scripts.</i> Enables you to provide customized installation instructions during specific phases of the installation or removal process.	“How to Write Procedure Scripts” on page 61
	<i>Write Class Action Scripts.</i> Enables you to specify a set of instructions to be executed during package installation and removal on specific groups of package objects.	“How to Write Class Action Scripts” on page 68

Creating Information Files

This section discusses optional package information files. With these files you can define package dependencies, provide a copyright message, and reserve additional space on a target system.

Defining Package Dependencies

You need to determine whether your package has dependencies on other packages and if any other packages depend on yours. Package dependencies and incompatibilities can be defined with two of the optional package information files, `compver` and `depend`. Delivering a `compver` file lets you name previous versions of your package that are compatible with the one being installed. Delivering a `depend` file lets you define three types of dependencies associated with your package. These dependency types are:

- A *prerequisite package* – meaning your package depends on the existence of another package
- A *reverse dependency* – meaning another package depends on the existence of your package

Note - Use the reverse dependency type only when a package that cannot deliver a `depend` file relies on your package.

- An *incompatible package* (meaning your package is incompatible with the named package)

The `depend` file resolves only very basic dependencies. If your package depends upon a specific file or its contents or behavior, the `depend` file does not supply adequate precision. In this case a `request` script or (for the Solaris 2.5 and later operating environments) the `checkinstall` script should be used for detailed dependency checking. The `checkinstall` script is also the only script capable of cleanly halting the package installation process.

Note - Be certain that your `depend` and `compver` files have entries in the `prototype` file. The file type should be `i` (for package information file).

Refer to the `depend(4)` and `compver(4)` man pages for more information.

▼ How to Define Package Dependencies

1. **Make the directory containing your information files the current working directory.**
2. **If previous versions of your package exist and you need to specify that your new package is compatible with them, create a file named `compver` with your favorite text editor.**

List the versions with which your package is compatible, using this format:

`string string . . .`

where

<i>string</i>	Is identical to the value assigned to the <code>VERSION</code> parameter in the <code>pkginfo</code> file, for each compatible package.
---------------	---

3. Save your changes and quit the editor.
4. If your package depends on the existence of other packages, other packages depend on the existence of your package, or your package is incompatible with another package, create a file named `depend` with your favorite text editor.
Add an entry for each dependency, using this format:

```

type pkg-abbrev pkg-name
  (arch) version
  (arch) version . . .

```

where

<i>type</i>	Defines the dependency type. Must be one of the following characters: <code>P</code> (prerequisite package), <code>I</code> (incompatible package), or <code>R</code> (reverse dependency).
<i>pkg-abbrev</i>	Specifies the package abbreviation, such as <code>SUNWcadap</code> .
<i>pkg-name</i>	Specifies the full package name, such as <code>Chip designers need CAD application software to design abc chips. Runs only on xyz hardware and is installed in the usr partition.</code>
<i>(arch)</i>	Optional. Specifies the type of hardware on which the package runs. For example, <code>sparc</code> or <code>x86</code> . If you specify an architecture, you must use the parentheses as delimiters.
<i>version</i>	Optional. Specifies the value assigned to the <code>VERSION</code> parameter in the <code>pkginfo</code> file.

For more information, see the `depend(4)` man page.

5. Save your changes and quit the editor.
6. Complete *one* of the following tasks:

- If you want to create additional information files and installation scripts, skip to the next task, “How to Write a Copyright Message” on page 47.
- If you have *not* created your `prototype` file, complete the procedure “How to Create a `prototype` File Using the `pkgproto` Command” on page 32, and skip to Step 7 on page 46.
- If you have already created your `prototype` file, edit it and add an entry for each file you just created.

7. Build your package.

See “How to Build a Package” on page 35, if needed.

Where to Go Next

After you build the package, install it to confirm that it installs correctly and verify its integrity. Chapter 4 explains how to do this and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Example—`compver` File

In this example, there are four versions of a package: 1.0, 1.1, 2.0, and the new package, 3.0, which is compatible with all the three previous versions. The `compver` file for the newest version might look like:

```
release 3.0
release 2.0
version 1.1
1.0
```

Note - The entries do not have to be in sequential order. However, they should exactly match the definition of the `VERSION` parameter in each package’s `pkginfo` file. In this example, the package designers used different formats in the first three versions.

Example—`depend` File

This example assumes that the sample package, `SUNWcadap`, requires that the `SUNWcsr` and `SUNWcsu` packages already be installed on a target system. The `depend` file for `SUNWcadap` looks like:

P SUNWcsr Core Solaris, (Root) P SUNWcsu Core Solaris, (Usr)

Writing a Copyright Message

You need to decide whether your package should display a copyright message while it is being installed. If so, create the `copyright` file.

Note - You should include a `copyright` file to provide legal protection for your software application. It might be a good idea to check with the legal department of your company for the exact wording of the message.

To deliver a copyright message, you must create a file named `copyright`. During installation, the message is displayed exactly as it appears in the file (with no formatting). See the `copyright(4)` man page for more information.

Note - Be certain that your `copyright` file has an entry in the `prototype` file. Its file type should be `i` (for package information file).

▼ How to Write a Copyright Message

1. **Make the directory containing your information files the current working directory.**
2. **Create a file named `copyright` with your favorite text editor.**
Enter the text of the copyright message exactly as you want it to appear as your package is installed.
3. **Save your changes and quit the editor.**
4. **Complete *one* of the following tasks.**
 - If you want to create additional information files and installation scripts, skip to the next task, “How to Reserve Additional Space on a Target System” on page 48.
 - If you have *not* created your `prototype` file, complete the procedure “How to Create a `prototype` File Using the `pkgproto` Command” on page 32, and skip to Step 5 on page 47.
 - If you have already created your `prototype` file, edit it and add an entry for the information file you just created.
5. **Build your package.**
See “How to Build a Package” on page 35, if needed.

Where to Go Next

After you build the package, install it to confirm that it installs correctly and verify its integrity. Chapter 4 explains how to do this and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Example—copyright File

For example, a partial copyright message might look like:

```
Copyright (c) 1996 Company Name
All Rights Reserved

This product is protected by copyright and distributed under
licenses restricting copying, distribution and decompilation.
```

Reserving Additional Space on a Target System

You need to determine whether your package needs additional disk space on the target system (space in addition to that required by the package objects). If so, create the `space` information file. This is different than creating empty files and directories at installation time as discussed in “Defining Additional Objects to Be Created at Install Time” on page 30.

While the `pkgadd` command ensures that there is enough disk space to install your package based on the object definitions in the `pkgmap` file, a package may require additional disk space beyond that needed by the objects defined in the `pkgmap` file. For example, your package might create a file after installation, which may contain a database, log files, or some other growing file that consumes disk space. To be sure that there is space set aside for it, you should include a `space` file specifying the disk space requirements. The `pkgadd` command checks for the additional space specified in a `space` file. Refer to the `space(4)` man page for more information.

Note - Be certain that your `space` file has an entry in the `prototype` file. Its file type should be `i` (for package information file).

▼ How to Reserve Additional Space on a Target System

1. **Make the directory containing your information files the current working directory.**
2. **Create a file named `space` with your favorite text editor.**

Enter any additional disk space requirements needed by your package, using this format:

pathname blocks inodes

where

<i>pathname</i>	Specifies a directory name, which may or may not be the mount point for a file system.
<i>blocks</i>	Specifies the number of 512-byte blocks that you want reserved.
<i>inodes</i>	Specifies the number of required inodes.

For more information, see the **space(4)** man page.

3. Save your changes and quit the editor.

4. Complete *one* of the following tasks.

- If you want to create installation scripts, skip to the next task, “How to Write a request Script” on page 56.
- If you have *not* created your `prototype` file, complete the procedure in “How to Create a prototype File Using the `pkgproto` Command” on page 32, and skip to Step 5 on page 49.
- If you have already created your `prototype` file, edit it and add an entry for the information file you just created.

5. Build your package.

See “How to Build a Package” on page 35, if needed.

Where to Go Next

After you build the package, install it to confirm that it installs correctly and verify its integrity. Chapter 4 explains how to do this and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Example—space File

This example `space` file specifies that 1000 512-byte blocks and 1 inode be set aside in `/opt` on the target system.

Creating Installation Scripts

This section discusses optional package installation scripts. The `pkgadd` command automatically performs all the actions necessary to install a package using the package information files as input. You do *not* have to supply any package installation scripts. However, if you want to create customized installation procedures for your package, you can do so with installation scripts. Installation scripts:

- Must be executable by the Bourne shell (`sh`).
- Must contain Bourne shell commands and text.
- Do not need to contain the `#!/bin/sh` shell identifier.
- Need not be an executable file.

There are four types of installation scripts with which you can perform customized actions:

- The `request` script

The `request` script solicits data from the administrator installing a package for assigning or redefining environment variables.

- The `checkinstall` script

The `checkinstall` script examines the target system for needed data, can set or modify package environment variables, and determines whether or not the installation proceeds.

Note - The `checkinstall` script is only available with the Solaris 2.5 and later operating environments.

- Procedure scripts

Procedure scripts identify a procedure to be invoked before or after the installation or removal of a package. The four procedure scripts are `preinstall`, `postinstall`, `preremove`, and `postremove`.

- Class action scripts

Class action scripts define an action or set of actions that should be applied to a class of files during installation or removal. You can define your own classes or use one of the three standard classes (`sed`, `awk`, and `build`).

Script Processing During Package Installation

The type of scripts you use depends on when the action of the script is needed during the installation process. As a package is installed, the `pkgadd` command performs the following steps:

1. Executes the `request` script.

This is the *only* point at which your package can solicit input from the administrator installing the package.

2. Executes the `checkinstall` script.

The `checkinstall` script gathers file system data and can create or alter environment variable definitions to control the subsequent installation. For more information on package environment variables, see “Package Environment Variables” on page 13.

3. Executes the `preinstall` script.

4. Installs package objects, for each class to be installed.

Installation of these files occurs class by class, and class action scripts are executed accordingly. The list of classes operated on and the order in which they should be installed is initially defined with the `CLASSES` parameter in your `pkginfo` file. However, your `request` script or `checkinstall` script can change the value of the `CLASSES` parameter. For more information on how classes are processed during installation, see “How Classes Are Processed During Installation” on page 62.

- a. Creates symbolic links, devices, named pipes, and required directories.
- b. Installs the regular files (file types `e`, `v`, `f`), based on their class.

The class action script is passed only regular files to install. All other package objects are created automatically from information in the `pkgmap` file.

- c. Creates all hard links.

5. Executes the `postinstall` script.

Script Processing During Package Removal

When a package is being removed, the `pkgrm` command performs these steps:

1. Executes the `preremove` script.
2. Removes the package objects, for each class.

Removal also occurs class by class. Removal scripts are processed in the reverse order of installation, based on the sequence defined in the `CLASSES` parameter. For more information on how classes are processed during installation, see “How Classes Are Processed During Installation” on page 62.

- a. Removes hard links.
- b. Removes regular files.
- c. Removes symbolic links, devices, and named pipes.

3. Executes the `postremove` script.

The `request` script is not processed at the time of package removal. However, its output (a list of environment variables) is retained in the installed package and made available to removal scripts.

Package Environment Variables Available to Scripts

The following four groups of environment variables are available to all installation scripts. Some of the environment variables can be modified by a `request` or `checkinstall` script.

- The 19 standard parameters that can be defined in the `pkginfo` file. Of these, the `request` or `checkinstall` script can only modify the `CLASSES` and the `BASEDIR` parameters. The standard installation parameters are described in detail in the `pkginfo(4)` man page.

Note - The `BASEDIR` parameter can only be modified with the Solaris 2.5 and later releases.

- You can define your own installation environment variables by assigning values to them in the `pkginfo` file. Such environment variables must be alphanumeric with initial capital letters. Any of these environment variables can be changed by a `request` or `checkinstall` script.
- Both a `request` script and a `checkinstall` script can define new environment variables by assigning values to them and putting them in the installation environment.
- Table 3-2 lists environment variables that are available to all installation scripts through the environment. None of these can be modified by a script.

TABLE 3-2 Package Environment Variables Available to Scripts

Environment Variable	Description
CLIENT_BASEDIR	The base directory with respect to the target system. While <code>BASEDIR</code> is the variable to use if you are referring to a specific package object from the install system (most likely a server), <code>CLIENT_BASEDIR</code> is the path to include in files placed on the client system. <code>CLIENT_BASEDIR</code> exists if <code>BASEDIR</code> exists and is identical to <code>BASEDIR</code> if there is no <code>PKG_INSTALL_ROOT</code> .
INST_DATADIR	The directory where the package now being read is located. If the package is being read from a tape, this will be the location of a temporary directory where the package has been transferred into directory format. In other words, assuming there is no extension to the package name (for example, <code>SUNWstuff.d</code>), the request script for the current package would be found at <code>\$INST_DATADIR/\$PKG/install</code> .
PATH	The search list used by <code>sh</code> to find commands on script invocation. <code>PATH</code> is usually set to <code>/sbin:/usr/sbin:/usr/bin:/usr/sadm/install/bin</code>
PKGINST	The instance identifier of the package being installed. If another instance of the package is not already installed, the value is the package abbreviation (for example, <code>SUNWcadap</code>). Otherwise, it is the package abbreviation followed by a suffix, such as <code>SUNWcadap.4</code> .
PKGSAV	The directory where files can be saved for use by removal scripts or where previously saved files can be found. Available only in the Solaris 2.5 and later releases.
PKG_INSTALL_ROOT	The root file system on the target system where the package is being installed. It exists only if the <code>pkgadd</code> and <code>pkgrm</code> commands were invoked with the <code>-R</code> option. This conditional existence facilitates its use in procedure scripts in the form <code>\${PKG_INSTALL_ROOT}/somepath</code> .
PKG_NO_UNIFIED	Is an environment variable that gets set if the <code>pkgadd</code> and <code>pkgrm</code> commands were invoked with the <code>-M</code> and <code>-R</code> options. This environment variable is passed to any package installation script or package command that is part of the package environment.
UPDATE	This environment variable does not exist under most installation environments. If it does exist (with the value <code>yes</code>), it means that a package with the same name, version, and architecture is already installed on the system or that this package is overwriting an installed package of the same name at the direction of the administrator. In these events, the original base directory is <i>always</i> used.

Obtaining Package Information for a Script

Two commands can be used from scripts to solicit information about a package:

- The `pkginfo` command returns information about software packages, such as the instance identifier and package name.
- The `pkgparam` command returns values for requested environment variables.

See the `pkginfo(1)` and `pkgparam(1)` man pages and Chapter 4 for more information.

Exit Codes for Scripts

Each script must exit with one of the exit codes shown in Table 3-3.

TABLE 3-3 Installation Script Exit Codes

Code	Meaning
0	Successful completion of script.
1	Fatal error. Installation process is terminated at this point.
2	Warning or possible error condition. Installation continues. A warning message is displayed at the time of completion.
3	The <code>pkgadd</code> command is cleanly halted. Only the <code>checkinstall</code> script returns this code.
10	System should be rebooted when installation of all selected packages is completed. (This value should be added to one of the single-digit exit codes described above.)
20	System should be rebooted immediately upon completing installation of the current package. (This value should be added to one of the single-digit exit codes described above.)

See Chapter 5 for examples of exit codes returned by installation scripts.

Note - All installation scripts delivered with your package should have an entry in the `prototype` file. The file type should be `i` (for package installation script).

Writing a request Script

The `request` script is the only way your package can interact directly with the administrator installing it. It can be used, for example, to ask the administrator if optional pieces of a package should be installed.

The output of a `request` script must be a list of environment variables and their values. This list can include any of the parameters you created in the `pkginfo` file and the `CLASSES` and `BASEDIR` parameters. The list can also introduce environment variables that have not been defined elsewhere (although the `pkginfo` file should always provide default values, when practical). For more information on package environment variables, see “Package Environment Variables” on page 13.

When your `request` script assigns values to an environment variable, it must then make those values available to the `pkgadd` command and other package scripts.

`request` Script Behaviors

- The `request` script cannot modify any files. It only interacts with administrators installing the package and creates a list of environment variable assignments based upon that interaction. To enforce this restriction, the `request` script is executed as the non-privileged user `install` if that user exists; otherwise it is executed as the non-privileged user `nobody`. The `request` script does not have superuser authority.
- The `pkgadd` command calls the `request` script with one argument that names the script's response file (the file that stores the administrator's responses).
- The `request` script is not executed during package removal. However, the environment variables assigned by the script are saved and are available during removal.

Design Rules for `request` Scripts

- There can be only one `request` script per package and it must be named `request`.
- The environment variable assignments should be added to the installation environment for use by the `pkgadd` command and other packaging scripts by writing them to the response file (known to the script as `$1`).
- System environment variables and standard installation environment variables, except for the `CLASSES` and `BASEDIR` parameters, cannot be modified by a `request` script. Any of the other environment variables you created can be changed.

Note - A `request` script can only modify the `BASEDIR` parameter as of Solaris 2.5 and later releases.

- Every environment variable that the `request` script may manipulate should be assigned a default value in the `pkginfo` file.
- The format of the output list should be *PARAM=value*. For example:

```
CLASSES=none class1
```

- The administrator's terminal is defined as standard input to the `request` script.
- Do not perform any special analysis of the target system in a `request` script. It is risky to test the system for the presence of certain binaries or behaviors, and set environment variables based upon that analysis, because there is no guarantee that the `request` script will actually be executed at install time. The administrator installing the package may provide a response file that will insert the environment variables without ever calling the `request` script. If the `request` script is also evaluating the target file system, that evaluation may not happen. An analysis of the target system for special treatment is best left to the `checkinstall` script.

Note - If it is possible that the administrators who will be installing your package will be using the JumpStart™ product, then the installation of your package must *not* be interactive. This implies that either you should not provide a `request` script with your package, or you need to communicate to the administrator that they should use the `pkgask` command, prior to installation, to store their responses to the `request` script. For more information on the `pkgask` command, see the `pkgask(1M)` man page.

▼ How to Write a `request` Script

1. **Make the directory containing your information files the current working directory.**
2. **Create a file named `request` with your favorite text editor.**
3. **Save your changes and quit the editor when you are done.**
4. **Complete *one* of the following tasks.**
 - If you want to create additional installation scripts, skip to the next task, “How to Gather File System Data” on page 58.
 - If you have *not* created your `prototype` file, complete the procedure “How to Create a `prototype` File Using the `pkgproto` Command” on page 32, and skip to Step 5 on page 56.
 - If you have already created your `prototype` file, edit it and add an entry for the installation script you just created.
5. **Build your package.**
See “How to Build a Package” on page 35, if needed.

Where to Go Next

After you build the package, install it to confirm that it installs correctly and verify its integrity. Chapter 4 explains how to do this and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Example—Writing a request Script

When a request script assigns values to environment variables, it must make those values available to the `pkgadd` command. This example shows a request script segment that performs this task for the four environment variables `CLASSES`, `NCMPBIN`, `EMACS`, and `NCMPMAN`. (These were defined in an interactive session with the administrator earlier in the script.)

```
# make environment variables available to installation
# service and any other packaging script we might have

cat >$1 <<!
CLASSES=$CLASSES
NCMPBIN=$NCMPBI
EMACS=$EMACS
NCMPMAN=$NCMPMAN
!
```

Gathering Data With the checkinstall Script

The `checkinstall` script is executed shortly after the optional request script. It runs as the user `install`, if such a user exists, or the user `nobody`. The `checkinstall` script does not have the authority to change file system data; it is strictly a data gatherer. However, based on the information it gathers, it can create or modify environment variables in order to control the course of the resulting installation. It is also capable of cleanly halting the installation process.

The `checkinstall` script is intended to perform basic checks on a file system that would not be normal for the `pkgadd` command. For example, it can be used to check ahead to determine if any files from the current package are going to overwrite existing files, or manage general software dependencies (the `depend` file only manages package-level dependencies).

Unlike the request script, the `checkinstall` script is executed whether or not a response file is provided; and, its presence does not brand the package as “interactive.” This means that the `checkinstall` script can be used in situations where a request script is forbidden or administrative interaction is not practical.

Note - The `checkinstall` script is available with the Solaris 2.5 and later releases.

checkinstall Script Behaviors

- The `checkinstall` script cannot modify any files. It only analyzes the state of the system and creates a list of environment variable assignments based upon that interaction. To enforce this restriction, the `checkinstall` script is executed as the non-privileged user `install` if that user exists; otherwise it is executed as the non-privileged user `nobody`. The `checkinstall` script does not have superuser authority.
- The `pkgadd` command calls the `checkinstall` script with one argument that names the script's response file (the file that stores the administrator's responses).
- The `checkinstall` script is not executed during package removal. However, the environment variables assigned by the script are saved and are available during removal.

Design Rules for checkinstall Scripts

- There can be only one `checkinstall` script per package and it must be named `checkinstall`.
- The environment variable assignments should be added to the installation environment for use by the `pkgadd` command and other packaging scripts by writing them to the response file (known to the script as `$1`).
- System environment variables and standard installation environment variables, except for the `CLASSES` and `BASEDIR` parameters, cannot be modified by a `checkinstall` script. Any of the other environment variables you created can be changed.
- Every environment variable that the `checkinstall` script may manipulate should be assigned a default value in the `pkginfo` file.
- The format of the output list should be *PARAM=value*. For example:

```
CLASSES=none class1
```

- Administrator interaction is not permitted during execution of a `checkinstall` script. All administrator interaction is restricted to the `request` script.

▼ How to Gather File System Data

1. **Make the directory containing your information files the current working directory.**
2. **Create a file named `checkinstall` with your favorite text editor.**
3. **Save your changes and quit the editor when you are done.**
4. **Complete *one* of the following tasks.**

- If you want to create additional installation scripts, skip to the next task, “How to Write Procedure Scripts” on page 61.
- If you have *not* created your prototype file, complete the procedure “How to Create a prototype File Using the pkgproto Command” on page 32, and skip to Step 5 on page 59.
- If you have already created your prototype file, edit it and add an entry for the installation script you just created.

5. Build your package.

See “How to Build a Package” on page 35, if needed.

Where to Go Next

After you build the package, install it to confirm that it installs correctly and verify its integrity. Chapter 4 explains how to do this and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Example—Writing a checkinstall Script

This example checkinstall script checks to see if database software needed by the SUNWcadap package is installed.

```
# checkinstall script for SUNWcadap
#
# This confirms the existence of the required specU database

# First find which database package has been installed.
pkginfo -q SUNWspcdA # try the older one

if [ $? -ne 0 ]; then
    pkginfo -q SUNWspcdB # now the latest

    if [ $? -ne 0 ]; then # oops
        echo "No database package can be found. Please install the"
        echo "SpecU database package and try this installation again."
        exit 3 # Suspend
    else
        DBBASE="'pkgparam SUNWsbcdB BASEDIR'/db" # new DB software
    fi
else
    DBBASE="'pkgparam SUNWspcdA BASEDIR'/db" # old DB software
fi

# Now look for the database file we will need for this installation
if [ $DBBASE/specUlatte ]; then
    exit 0 # all OK
else
    echo "No database file can be found. Please create the database"
```

(continued)

```

    echo "using your installed specU software and try this"
    echo "installation again."
    exit 3  # Suspend
fi

```

Writing Procedure Scripts

The procedure scripts provide a set of instructions to be performed at particular points in package installation or removal. The four procedure scripts must be named one of the predefined names, depending on when the instructions are to be executed, and are executed without arguments.

- The `preinstall` script
Runs before class installation begins. No files should be installed by this script.
- The `postinstall` script
Runs after all volumes have been installed.
- The `preremove` script
Runs before class removal begins. No files should be removed by this script.
- The `postremove` script
Runs after all classes have been removed.

Procedure Script Behaviors

Procedure scripts are executed as `uid=root` and `gid=other`.

Design Rules for Procedure Scripts

- Each script should be able to be executed more than once since it is executed once for each volume in a package. This means that executing a script any number of times with the same input produces the same results as executing the script only once.
- Each procedure script that installs a package object not in the `pkgmap` file must use the `installf` command to notify the package database that it is adding or modifying a path name. After all additions or modifications are complete, this command should be invoked with the `-f` option. Only `postinstall` and `postremove` scripts may install package objects in this way. See the `installf(1M)` man page and Chapter 5 for more information.

- Administrator interaction is not permitted during execution of a procedure script. All administrator interaction is restricted to the `request` script.
- Each procedure script that removes files not installed from the `pkgmap` file must use the `removef` command to notify the package database that it is removing a path name. After removal is complete, this command should be invoked with the `-f` option. See the `removef(1M)` man page and Chapter 5 for details and examples.

Note - The `installf` and `removef` commands must be used because procedure scripts are not automatically associated with any path names listed in the `pkgmap` file.

▼ How to Write Procedure Scripts

1. **Make the directory containing your information files the current working directory.**
2. **Create one or more procedure scripts with your favorite text editor.**
A procedure script must be named one of the predefined names: `preinstall`, `postinstall`, `preremove`, or `postremove`.
3. **Save your changes and quit the editor.**
4. **Complete *one* of the following tasks.**
 - If you want to create class action scripts, skip to the next task, “How to Write Class Action Scripts” on page 68.
 - If you have *not* created your `prototype` file, complete the procedure “How to Create a `prototype` File Using the `pkgproto` Command” on page 32, and skip to Step 5 on page 61.
 - If you have already created your `prototype` file, edit it and add an entry for each installation script you just created.
5. **Build your package.**
See “How to Build a Package” on page 35, if needed.

Where to Go Next

After you build the package, install it to confirm that it installs correctly and verify its integrity. Chapter 4 explains how to do this and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Writing Class Action Scripts

Defining Object Classes

Object classes allow a series of actions to be performed on a group of package objects at installation or removal. You assign objects to a class in the `prototype` file. All package objects must be given a class, although the class of `none` is used by default for objects that require no special action.

The installation parameter `CLASSES`, defined in the `pkginfo` file, is a list of classes to be installed (including the `none` class).

Note - Objects defined in the `pkgmap` file that belong to a class not listed in this parameter in the `pkginfo` file will *not* be installed.

The `CLASSES` list determines the order of installation. Class `none` is always installed first, if present, and removed last. Since directories are the fundamental support structure for all other file system objects, they should all be assigned to the `none` class. Exceptions can be made, but as a general rule, the `none` class is safest. The reason for this is to ensure that the directories are created before the objects they will contain and also to ensure that no attempt is made to delete a directory before it has been emptied.

How Classes Are Processed During Installation

The following list describes the system actions that occur when a class is installed. The actions are repeated once for each volume of a package as that volume is being installed.

1. The `pkgadd` command creates a path name list.

The `pkgadd` command creates a list of path names upon which the action script will operate. Each line of this list contains source and destination path names, separated by a space. The source path name indicates where the object to be installed resides on the installation volume and the destination path name indicates the location on the target system where the object should be installed. The contents of the list are restricted by the following criteria:

- The list contains only path names belonging to the associated class.
- If the attempt to create the package object fails, directories, named pipes, character devices, block devices, and symbolic links are included in the list with the source path name set to `/dev/null`. Normally they will be automatically created by the `pkgadd` command (if not already in existence) and given proper attributes (mode, owner, group) as defined in the `pkgmap` file.
- Linked files where the file type is `1` are not included in the list under any circumstances. Hard links in the given class are created in item 4.

- If a path name already exists on the target system and it is the same as the path name being installed, it is not included in the list. The path name is judged the same if size and checksum are identical.
- 2. If no class action script is provided for installation of a particular class, the path names in the generated list are copied from the volume to the appropriate target location.
- 3. If there is a class action script, the script is executed.

The class action script is invoked with standard input containing the list generated in item 1. If this is the last volume of the package, or there are no more objects in this class, the script is executed with the single argument of `ENDOFCLASS`.

Note - Even if there are no regular files of this class anywhere in the package, the class action script will be called at least once with an empty list and the `ENDOFCLASS` argument.

- 4. The `pkgadd` command performs a content and attribute audit and creates hard links.

After successfully executing items 2 or 3, the `pkgadd` command audits both content and attribute information for the list of path names. The `pkgadd` command creates the links associated with the class automatically. Detected attribute inconsistencies are corrected for all path names in the generated list.

How Classes Are Processed During Removal

Objects are removed class by class. Classes that exist for a package but that are not listed in the `CLASSES` parameter are removed first (for example, an object installed with the `installf` command). Classes listed in the `CLASSES` parameter are removed in reverse order. The `none` class is always removed last. The following list describes the system actions that occur when a class is removed:

- 1. The `pkgrm` command creates a path name list.

The `pkgrm` command creates a list of installed path names that belong to the indicated class. Path names referenced by another package are excluded from the list unless their file type is `e` (meaning the file should be edited upon installation or removal).

If the package being removed modified any files of type `e` during installation, it should remove just the lines it added. Do not delete a non-empty editable file; just remove the lines the package added.

- 2. If there is no class action script, the path names are deleted.

If your package has no removal class action script for the class, all the path names in the list generated by the `pkgrm` command are deleted.

Note - Files with a file type of `e` (editable), which are not assigned to a class and an associated class action script, will be removed at this point, even if the path name is shared with other packages.

3. If there is a class action script, the script is executed.

The `pkgrm` command invokes the class action script with standard input for the script containing the list generated in item 1.

4. The `pkgrm` command performs an audit.

After successfully executing the class action script, the `pkgrm` command removes knowledge of the path names from the package database unless a path name is referenced by another package.

The Class Action Script

The class action script defines a set of actions to be executed during installation or removal of a package. The actions are performed on a group of path names based on their class definition. (See Chapter 5, for examples of class action scripts.)

The name of a class action script is based on the class on which it should operate and whether those operations should occur during package installation or removal. The two name formats are as follows:

Name Format	Description
<code>i.class</code>	Operates on path names in the indicated class during package installation.
<code>r.class</code>	Operates on path names in the indicated class during package removal.

For example, the name of the installation script for a class named `manpage` would be `i.manpage` and the removal script would be named `r.manpage`.

Note - This file name format is not used for files belonging to the `sed`, `awk`, or `build` system classes. For more information on these special classes, see “The Special System Classes” on page 65.

Class Action Script Behaviors

- Class action scripts are executed as `uid=root` and `gid=other`.
- A script is executed for all files in the given class on the current volume (for example, floppy disk).

- The `pkgadd` and `pkgrm` commands create a list of all objects listed in the `pkgmap` file that belong to the class. As a result, a class action script can act only upon path names defined in the `pkgmap` that belong to a particular class.
- When a class action script is executed for the last time (that is, no more files are found belonging to that class), the class action script will be executed once with the keyword argument `ENDOFCLASS`.
- Administrator interaction is not permitted during execution of a class action script.

Design Rules for Class Action Scripts

- If a package spans more than one volume, the class action script is executed once for each volume that contains at least one file belonging to a class. Consequently, each script must be able to be executed more than once. This means that executing a script any number of times with the same input must produce the same results as executing the script only once.
- When a file is part of a class that has a class action script, the script must install the file. The `pkgadd` command does not install files for which a class action script exists, although it does verify the installation.
- A class action script should never add, remove, or modify a path name or system attribute that does not appear in the list generated by the `pkgadd` command. For more information on this list, see item 1 in “How Classes Are Processed During Installation” on page 62.
- When your script sees the `ENDOFCLASS` argument, put post-processing actions (like clean up) into your script.
- All administrator interaction is restricted to the `request` script. Do not try to obtain information from the administrator using a class action script.

The Special System Classes

The system provides three special classes in the Solaris 2.5 and later operating environments. They are:

- The `sed` class
Provides a method for using `sed` instructions to edit files upon package installation and removal.
- The `awk` class
Provides a method for using `awk` instructions to edit files upon package installation and removal.
- The `build` class
Provides a method to dynamically construct or modify a file using Bourne shell commands.

If there are several files in a package that require special processing that can be fully defined through `sed`, `awk`, or `sh` commands, installation will be faster by using the system classes rather than multiple classes and their corresponding class action scripts.

The sed Class Script

The `sed` class provides a method to modify an existing object on the target system. The `sed` class action script executes automatically at installation if a file belonging to class `sed` exists. The name of the `sed` class action script should be the same as the name of the file on which the instructions will be executed.

A `sed` class action script delivers `sed` instructions in the format shown in Figure 3-1.

```
# comment, which may appear on any line in the file

!install
# sed(1) instructions which will be invoked during
# installation of the object

[address [,address]] function [arguments]

. . .

!remove

# sed(1) instructions to be invoked during the removal process

[address [,address]] function [arguments]
```

Figure 3-1 Format of a `sed` Class Action Script

Two commands indicate when instructions should be executed. The `sed` instructions that follow the `!install` command are executed during package installation and those that follow the `!remove` command are executed during package removal. It does not matter which order these commands are used in the file.

For more information on `sed` instructions, see the `sed(1)` man page. For examples of `sed` class action scripts, see Chapter 5.

The awk Class Script

The `awk` class provides a method to modify an existing object on the target system. Modifications are delivered as `awk` instructions in an `awk` class action script.

The `awk` class action script is executed automatically at installation if a file belonging to class `awk` exists. Such a file contains instructions for the `awk` class script in the format shown in Figure 3-2.

```
# comment, which may appear on any line in the file

!install

# awk(1) program to install changes
. . . (awk program)

!remove

# awk(1) program to remove changes
. . . (awk program)
```

Figure 3-2 Format of an `awk` Class Action Script

Two commands indicate when instructions should be executed. The `awk` instructions that follow the `!install` command are executed during package installation, and those that follow the `!remove` command are executed during package removal. It does not matter in which order these commands are used in the file.

The name of the `awk` class action script should be the same as the name of the file on which the instructions will be executed.

The file to be modified is used as input to `awk` and the output of the script ultimately replaces the original object. Environment variables may not be passed to the `awk` command with this syntax.

For more information on `awk` instructions, see the `awk(1)` man page.

The build Class Script

The `build` class creates or modifies a package object file by executing Bourne shell instructions. These instructions are delivered as the package object, which runs automatically at installation if it belongs to the `build` class.

The name of the `build` class action script should be the same as the name of the file on which the instructions will be executed, and must be executable by the `sh` command. The script's output becomes the new version of the file as it is built or modified.

For example, if a package delivers a default file, `/etc/randomtable`, and if the file does not already exist on the target system, the `prototype` file entry might be:

```
e build /etc/randomtable ? ? ?
```

and the package object, `/etc/randomtable`, might look like this:

```

!install
# randomtable builder
if [ -f $PKG_INSTALL_ROOT/etc/randomtable ]; then
    echo "/etc/randomtable is already in place.";
else
    echo "# /etc/randomtable" > $PKG_INSTALL_ROOT/etc/randomtable
    echo "1121554 # first random number" >> $PKG_INSTALL_ROOT/etc/randomtable
fi

!remove
# randomtable deconstructor
if [ -f $PKG_INSTALL_ROOT/etc/randomtable ]; then
    # the file can be removed if it's unchanged
    if [ egrep "first random number" $PKG_INSTALL_ROOT/etc/
randomtable ]; then
        rm $PKG_INSTALL_ROOT/etc/randomtable;
    fi
fi

```

See Chapter 5, for another example using the build class.

▼ How to Write Class Action Scripts

1. **Make the directory containing your information files the current working directory.**
2. **Assign the package objects in the prototype file the desired class names. For example, assigning objects to an application and manpage class would look like:**

```

f manpage /usr/share/man/man1/myappl.11
f application /usr/bin/myappl

```

3. **Modify the CLASSES parameter in the pkginfo file to contain the class names you want to use in your package. For example, entries for the application and manpage classes would look like:**

```

CLASSES=manpage application none

```

Note - The none class is always installed first and removed last, regardless of where it appears in the definition of the CLASSES parameter.

4. **If you are creating a class action script for a file belonging to the `sed`, `awk`, or `build` class, make the directory containing the package object your current working directory.**

5. **Create the class action scripts or package objects (for files belonging to the `sed`, `awk`, or `build` class). An installation script for a class named `application` would be named `i.application` and a removal script would be named `r.application`.**

Remember, when a file is part of a class that has a class action script, the script must install the file. The `pkgadd` command does not install files for which a class action script exists, although it does verify the installation. And, if you define a class but do not deliver a class action script, the only action taken for that class is to copy components from the installation medium to the target system (the default `pkgadd` behavior).

6. **Complete *one* of the following tasks.**

- If you have *not* created your `prototype` file, complete the procedure “How to Create a `prototype` File Using the `pkgproto` Command” on page 32, and skip to Step 7 on page 69.
- If you have already created your `prototype` file, edit it and add an entry for each installation script you just created.

7. **Build your package.**

See “How to Build a Package” on page 35, if needed.

Where to Go Next

After you build the package, install it to confirm that it installs correctly and verify its integrity. Chapter 4 explains how to do this and provides step-by-step instructions on how to transfer your verified package to a distribution medium.

Verifying and Transferring a Package

This chapter describes how to verify your package’s integrity and transfer it to a distribution medium, such as floppy disk or a CD-ROM.

This is a list of the overview information in this chapter:

- “Task Map: Verifying and Transferring a Package” on page 71
 - “Installing Software Packages” on page 72
 - “Verifying the Integrity of a Package” on page 76
 - “Displaying Additional Information About Installed Packages” on page 79
 - “Removing a Package” on page 85
 - “Transferring a Package to a Distribution Medium” on page 87

Task Map: Verifying and Transferring a Package

Table 4-1 describes the steps you should follow in order to verify your package’s integrity and transfer it to a distribution medium.

TABLE 4-1 Task Map: Verifying and Transferring a Package

Task	Description	For Instructions, Go To
Build Your Package	Build your package on disk.	Chapter 2

TABLE 4-1 Task Map: Verifying and Transferring a Package *(continued)*

Task	Description	For Instructions, Go To
Install Your Package	Test your package by installing it and making sure that it installs without errors.	"How to Install a Package on a Standalone or Server" on page 74 and "How to Add a Package to a Diskless or AutoClient System's Root File System" on page 75
Verify Your Package's Integrity	Use the <code>pkgchk</code> command to verify the integrity of your package.	"How to Verify the Integrity of Your Package" on page 77
Obtain Other Package Information	Optional. Use the <code>pkginfo</code> and <code>pkgparam</code> commands to perform package-specific verification.	"Displaying Additional Information About Installed Packages" on page 79
Remove the Installed Package	Use the <code>pkgrm</code> command to remove your installed package from the system.	"How to Remove a Package" on page 85 and "How to Remove a Package From a Diskless or AutoClient System" on page 86
Transfer Your Package to a Distribution Medium	Use the <code>pkgtrans</code> command to transfer your package (in package format) to a distribution medium.	"How to Transfer Your Package to a Distribution Medium" on page 87

Installing Software Packages

Software packages are installed using the `pkgadd` command. This command transfers the contents of a software package from the distribution medium or directory and installs it onto a system.

This section provides basic installation instructions for installing your package in order to verify that it installs correctly. For more comprehensive installation examples, such as installing packages for diskless clients in a heterogeneous environment, see Chapter 18 in the *System Administration Guide*.

The Installation Software Database

Information for all packages installed on a system is kept in the installation software database. There is an entry for every object in a package, with information such as the component name, where it resides, and its type. An entry contains a record of the package to which a component belongs; other packages that might reference the component; and information such as path name, where the component resides and the component type. Entries are added and removed automatically by the `pkgadd` and `pkgrm` commands. You can view the information in the database by using the `pkgchk` and the `pkginfo` commands.

Two types of information are associated with each package component. The attribute information describes the component itself. For example, the component's access permissions, owner ID, and group ID are attribute information. The content information describes the contents of the component, such as file size and time of last modification.

The installation software database keeps track of the package status. A package can be either fully installed (it has successfully completed the installation process), or partially installed (it did not successfully complete the installation process).

When a package is partially installed, portions of a package may have been installed before installation was terminated; thus, part of the package is installed, and recorded in the database, and part is not. When you reinstall the package, you are prompted to start at the point where installation stopped because the `pkgadd` command can access the database and detect which portions have already been installed. You can also remove the portions that have been installed, based on the information in the installation software database using the `pkgrm` command.

Interacting with the `pkgadd` Command

If the `pkgadd` command encounters a problem, it first checks the installation administration file for instructions. (See the `admin(4)` man page for more information.) If no instructions exist, or if the relevant parameter in the administration file is set to `ask`, the `pkgadd` displays a message describing the problem and prompts for a reply. The prompt is usually `Do you want to continue with this installation?.` You should respond with `yes`, `no`, or `quit`.

If you have specified more than one package, `no` stops installation of the package being installed but `pkgadd` continues with installation of the other packages. `quit` indicates that `pkgadd` should stop installation of all packages.

Installing Packages on Standalones or Servers in a Homogeneous Environment

▼ How to Install a Package on a Standalone or Server

1. Build your package.

See “Building a Package” on page 34, if needed.

2. Log in to the system as superuser.

3. Add the software package to the system.

```
# pkgadd -d device-name [pkg-abbrev. . .]
```

`-d device-name`

Specifies the location of the package. Note that *device-name* can be a full directory path name or the identifiers for a tape, floppy disk, or removable disk.

pkg-abbrev

Is the name of one or more packages (separated by spaces) to be added. If omitted, `pkgadd` installs all available packages.

Where to Go Next

If you are ready to go to the next task, see “How to Verify the Integrity of Your Package” on page 77.

Example—Installing Packages on Standalones and Servers

To install a software package named `pkgA` from a tape device named `/dev/rmt/0`, you would enter the following command:

```
# pkgadd -d /dev/rmt/0 pkgA
```

You can also install multiple packages at the same time, as long as you separate package names with a space, as follows:

```
# pkgadd -d /dev/rmt/0 pkgA pkgB pkgC
```

If you do not name the device on which the package resides, the command checks the default spool directory (`/var/spool/pkg`). If the package is not there, the installation fails.

Installing Packages for Diskless Clients and AutoClient Systems on a Server

This section describes how to install packages for a client system that places files in the root (`/`) file system. Note that packages that do not place files in root (`/`) can be made available to client systems by installing the package on the server with the `pkgadd` command—these packages are then made available when the file systems are mounted by the client systems.

Packages that are not part of the Solaris operating environment (unbundled software packages) should be installed into `/opt`. However, some packages, such as a package containing a device driver, must be installed into root (`/`) or `/usr`.

Use the `pkgadd` command on a server to install software for the use of client systems. Software installed for the use of client systems is installed in the client system's root (`/`) file system, not the server's root (`/`) file system. A diskless client's and AutoClient system's root (`/`) file system is located on the server, in the directory `/export/root/client`.

Files installed in the client system's root (`/`) file system appear in the client system's software database as `installed`. Files that the client expects to find in its `/usr` file system are shown as `shared` in the client system's database. The shared files must be installed on the server with a separate invocation of the `pkgadd` command.

▼ How to Add a Package to a Diskless or AutoClient System's Root File System

1. **Build your package.**
See “Building a Package” on page 34, if needed.
2. **Log in to the server as superuser.**
3. **Add a software package to the client system's root file system.**

```
server# pkgadd -d device-name -R rootpath [pkg-abbrev...]
```

<code>-d device-name</code>	Specifies the location of the package. Note that <i>device-name</i> can be a full directory path name or the identifiers for a tape, floppy disk, or removable disk.
<code>-R rootpath</code>	Specifies the location of the client system's root (/) file system on the server.
<i>pkg-abbrev</i>	Is the name of one or more packages (separated by spaces) to be added. If omitted, <code>pkgadd</code> installs all available packages.

Where to Go Next

If you are ready to go to the next task, see “How to Verify the Integrity of Your Package” on page 77.

Example—Installing a Package to a Diskless Client's Root File System

The following example shows a command to install the `SUNWadmr` (software to support system and network administration) package from a server onto a diskless client's root file system. In this case, the diskless client's root file system is `/export/root/client-1`. This example assumes the `SUNWadmr` package is available from a mounted SPARC 2.x Solaris CD (`/cdrom/cdrom0/s0/Solaris_2.6`).

```
server# pkgadd -d /cdrom/cdrom0/s0/Solaris_2.6 -R /export/root/client-1 SUNWadmr
.
.
.
Installation of <SUNWadmr> complete.
server#
```

Verifying the Integrity of a Package

The `pkgchk` command enables you to check the integrity of packages, whether they are installed on a system or in package format (ready to be installed with the

pkgadd command). It confirms package structure or the installed files and directories, or displays information about package objects. The pkgchk command can list or check the following:

- The package installation scripts.
- The contents or attributes, or both, of objects currently installed on the system.
- The contents of a spooled, uninstalled package.
- The contents or attributes, or both, of objects described in the specified pkgmap file.

For more information about this command, refer to the **pkgchk(1M)** man page.

The pkgchk command performs two kinds of checks. It checks file attributes (the permissions and ownership of a file and major/minor numbers for block or character special devices) and the file contents (the size, checksum, and modification date). By default, the command checks both the file attributes and the file contents.

The pkgchk command also compares the file attributes and contents of the installed package against the installation software database. The entries concerning a package may have been changed since the time of installation; for example, another package may have changed a package component. The database reflects that change.

▼ How to Verify the Integrity of Your Package

1. Install your package.

See “How to Install a Package on a Standalone or Server” on page 74 or “How to Add a Package to a Diskless or AutoClient System’s Root File System” on page 75, if needed.

2. Verify the integrity of your package.

```
# pkgchk [-v] [-R root-path] [pkg-abbrev. . .]
```

-v

Lists files as they are processed.

-R *root-path*

Specifies the location of the client system’s root file system.

pkg-abbrev

Is the name of one or more packages (separated by spaces) to be checked. If omitted, pkgchk checks all available packages.

Where to Go Next

If you are ready to go to the next task, see “How to Obtain Information With the `pkginfo` Command” on page 84.

Example—Verifying the Integrity of a Package

This example shows the command you should use to verify the integrity of an installed package.

```
$ pkgchk pkg-abbrev
$
```

If there are errors, the `pkgchk` command prints them. Otherwise, it does not print anything and returns an exit code of 0. If you do not supply a package abbreviation, then it will check all of the packages on the system.

Alternately, you could use the `-v` option, which will print a list of files in the package if there are no errors. For example,

```
$ pkgchk -v SUNWcadap
/opt/SUNWcadap
/opt/SUNWcadap/demo
/opt/SUNWcadap/demo/file1
/opt/SUNWcadap/lib
/opt/SUNWcadap/lib/file2
/opt/SUNWcadap/man
/opt/SUNWcadap/man/man1
/opt/SUNWcadap/man/man1/file3.1
/opt/SUNWcadap/man/man1/file4.1
/opt/SUNWcadap/man/windex
/opt/SUNWcadap/srcfiles
/opt/SUNWcadap/srcfiles/file5
/opt/SUNWcadap/srcfiles/file6
$
```

If you need to verify a package that is installed on a client system's root file system, use this command:

```
$ pkgchk -v -R root-path pkg-abbrev
```

Displaying Additional Information About Installed Packages

You can use two other commands to display information about installed packages:

- The `pkgparam` command displays parameter values.
- The `pkginfo` command displays information from the installation software database.

The `pkgparam` Command

The `pkgparam` command enables you to display the values associated with the parameters you specified on the command line. The values are retrieved from either the `pkginfo` file for a specific package, or from the file you name. One parameter value is shown per line. You can display the values only or the parameters and their values.

▼ How to Obtain Information With the `pkgparam` Command

1. Install your package.

See “How to Install a Package on a Standalone or Server” on page 74 or “How to Add a Package to a Diskless or AutoClient System’s Root File System” on page 75, if needed.

2. Display additional information about your package.

```
# pkgparam [-v] pkg-abbrev [param...]
```

<code>-v</code>	Displays the name of the parameter and its value.
<i>pkg-abbrev</i>	Is the name of a specific package.
<i>param</i>	Specifies one or more parameters whose value is displayed.

Where to Go Next

If you are ready to go to the next task, see “How to Remove a Package” on page 85 or “How to Remove a Package From a Diskless or AutoClient System” on page 86.

Example—Obtaining Information With the `pkgparam` Command

For example, to display values only, use this command.

```
$ pkgparam SUNWcadap
none
/opt
US/Mountain
/sbin:/usr/sbin:/usr/bin:/usr/sadm/install/bin
/usr/sadm/sysadm
SUNWcadap
Chip designers need CAD application software to design abc
chips.  Runs only on xyz hardware and is installed in the usr
partition.
system
release 1.0
SPARC
upnaway960717083849
SUNWcadap
/var/sadm/pkg/SUNWcadap/save
Jul 29 1996 15:24
$
```

To display parameters and their values, use the following command.

```
$ pkgparam -v SUNWcadap
pkgparam -v SUNWcadap
CLASSES='none'
BASEDIR='/opt'
TZ='US/Mountain'
PATH='/sbin:/usr/sbin:/usr/bin:/usr/sadm/install/bin'
OAMBASE='/usr/sadm/sysadm'
PKG='SUNWcadap'
NAME='Chip designers need CAD application software to design abc chips.
Runs only on xyz hardware and is installed in the usr partition.'
CATEGORY='system'
VERSION='release 1.0'
ARCH='SPARC'
PSTAMP='upnaway960717083849'
PKGINST='SUNWcadap'
PKGSAPV='/var/sadm/pkg/SUNWcadap/save'
INSTDATE='Jul 29 1996 15:24'
$
```

Or, if you want to display the value of a specific parameter, use this format:

```
$ pkgparam SUNWcadap BASEDIR
/opt
$
```

For more information, refer to the `pkgparam(1)` man page.

The `pkginfo` Command

You can display information about installed packages with the `pkginfo` command. This command has several options that enable you to customize both the format and the contents of the display.

You can request information about any number of package instances.

The Default `pkginfo` Display

When the `pkginfo` command is executed without options, it displays the category, package instance, and package name of all packages that have been completely installed on your system. The display is organized by categories as shown in the following example.

```
$ pkginfo
.
.
.
system      SUNWinst      Install Software
system      SUNWipc        Interprocess Communications
system      SUNWisolc       XSH4 conversion for ISO Latin character sets
application SUNWkcspf       KCMS Optional Profiles
application SUNWkcspg     KCMS Programmers Environment
application SUNWkcsrt     KCMS Runtime Environment
.
.
.
$
```

Customizing the Format of the `pkginfo` Display

You can get a `pkginfo` display in any of three formats: short, extracted, and long.

The short format is the default. It shows only the category, package abbreviation, and full package name, as shown in “The Default `pkginfo` Display” on page 81.

The extracted format shows the package abbreviation, package name, package architecture (if available), and package version (if available). Use the `-x` option to request the extracted format as shown in the next example.

```

$ pkginfo -x
.
.
.
SUNWipc      Interprocess Communications
              (sparc) 11.5.1,REV=95.10.27.15.23
SUNWisolc    XSH4 conversion for ISO Latin character sets
              (sparc) 1.0,REV=5.0
SUNWkcspf    KCMS Optional Profiles
              (sparc) 1.0,REV=1.0.14
SUNWkcspg    KCMS Programmers Environment
              (sparc) 1.0,REV=1.0.1
.
.
.
$

```

Using the `-l` option produces a display in the long format showing all of the available information about a package, as in the following example.

```

$ pkginfo -l SUNWcadap
  PKGINST: SUNWcadap
    NAME:  Chip designers need CAD application software to
design abc chips.  Runs only on xyz hardware and is installed
in the usr partition.
  CATEGORY: system
    ARCH:   SPARC
  VERSION:  release 1.0
  BASEDIR:  /opt
  PSTAMP:   system960717083849
  INSTDATE: Jul 29 1996 15:24
  STATUS:   completely installed
  FILES:    13 installed pathnames
              6 directories
              3 executables
              3121 blocks used (approx)
$

```

Parameter Descriptions for the `pkginfo` Long Format

Table 4–2 describes the package parameters that can be displayed for each package. A parameter and its value are displayed only when the parameter has a value assigned to it.

TABLE 4-2 Package Parameters

Parameter	Description
ARCH	The architecture supported by this package.
BASEDIR	The base directory in which the software package resides (shown if the package is relocatable).
CATEGORY	The software category, or categories, of which this package is a member (for example, <code>system</code> or <code>application</code>).
CLASSES	A list of classes defined for a package. The order of the list determines the order in which the classes are installed. Classes listed first will be installed first (on a media by media basis). This parameter may be modified by the request script.
DESC	Text that describes the package.
EMAIL	The electronic mail address for user inquiries.
HOTLINE	Information on how to receive hotline help about this package.
INTONLY	Indicates that the package should only be installed interactively when set to any non-NULL value.
ISTATES	A list of allowable run states for package installation (for example, <code>S s 1</code>).
MAXINST	The maximum number of package instances that should be allowed on a machine at the same time. By default, only one instance of a package is allowed.
NAME	The package name, generally text describing the package abbreviation.
ORDER	A list of classes defining the order in which they should be put on the medium. Used by the <code>pkgmk</code> command in creating the package. Classes not defined in this parameter are placed on the medium using the standard ordering procedures.
PKGINST	Abbreviation for the package being installed.
PSTAMP	The production stamp for this package
RSTATES	A list of allowable run states for package removal (for example, <code>S s 1</code>).

TABLE 4-2 Package Parameters *(continued)*

ULIMIT	If set, this parameter is passed as an argument to the <code>ulimit</code> command, which establishes the maximum size of a file during installation. This applies only to files created by procedure scripts.
VENDOR	The name of the vendor who supplied the software package.
VERSION	The version of this package.
VSTOCK	The vendor-supplied stock number.

For detailed information about the `pkginfo` command, refer to the `pkginfo(1)` man page.

▼ How to Obtain Information With the `pkginfo` Command

1. Install your package.

See “How to Install a Package on a Standalone or Server” on page 74 or “How to Add a Package to a Diskless or AutoClient System’s Root File System” on page 75, if needed.

2. Display additional information about your package.

```
# pkginfo [-x | -l] [pkg-abbrev]
```

<code>-x</code>	Displays package information in extracted format.
<code>-l</code>	Displays package information in long format.
<i>pkg-abbrev</i>	Is the name of a specific package. If omitted, the <code>pkginfo</code> command displays information about all installed packages, in the default format.

Where to Go Next

If you are ready to go to the next task, see “How to Remove a Package” on page 85 or “How to Remove a Package From a Diskless or AutoClient System” on page 86.

Removing a Package

Because the `pkgrm` command updates information in the software products database, it is important when you remove a package to use the `pkgrm` command—even though you might be tempted to use the `rm` command instead. For example, you could use the `rm` command to remove a binary executable file, but that is not the same as using `pkgrm` to remove the software package that includes that binary executable. Using the `rm` command to remove a package’s files will corrupt the software products database. (If you really only want to remove one file, you can use the `removef` command, which will update the software product database correctly. See the `removef(1)` man page for more information.)

▼ How to Remove a Package

1. Log in to the system as superuser.
2. Remove an installed package.

```
# pkgrm pkg-abbrev...
```

pkg-abbrev

Is the name of one or more packages (separated by spaces). If omitted, `pkgrm` removes all available packages.

3. Verify that the package has successfully been removed, use the `pkginfo` command.

```
$ pkginfo | egrep pkg-abbrev
```

If *pkg-abbrev* is installed, the `pkginfo` command returns a line of information about it. Otherwise, `pkginfo` returns the system prompt.

▼ How to Remove a Package From a Diskless or AutoClient System

1. Log in to the server and become superuser.
2. Remove a software package from a client system's server with the `pkgrm -R` command.

```
server# pkgrm -R rootpath pkg-abbrev...
```

<code>-R rootpath</code>	Specifies the mount point of the client's root file system.
<code>pkg-abbrev</code>	Is the name of one or more packages (separated by spaces) to be removed. If omitted, <code>pkgrm</code> removes all available packages.

Files in the client system's package database that are marked shared are not removed from the server, but are removed from the client system's database. If all client systems have removed the package, you can remove the shared files from the server using a separate invocation of `pkgrm` on the server.

3. Verify that the package has successfully been removed, use the `pkginfo` command.

```
server$ pkginfo -R rootpath | egrep pkg-abbrev
```

If `pkg-abbrev` is installed, the `pkginfo` command returns a line of information about it. Otherwise, `pkginfo` returns the system prompt.

Where to Go Next

If you are ready to go to the next task, see “How to Transfer Your Package to a Distribution Medium” on page 87.

Example—Removing a Diskless Client's Package

In the following example, assume the client system's root file system is shared. Also, assume these commands are executed on the client system's server.

```
server# pkgrm -R /export/root/client-1 SUNWaudio
The following package is currently installed.
SUNWaudio
```

(continued)

```

Do you want to remove this package? y/n/q?
y
.
.
.
server#

```

Transferring a Package to a Distribution Medium

The `pkgtrans` command moves packages and performs package format translations. You can use the `pkgtrans` command to perform the following translations for an installable package:

- File system format to datastream format
- Datastream format to file system format
- One file system format to another file system format

▼ How to Transfer Your Package to a Distribution Medium

1. **Build your package, creating a directory format package, if you have not already done so.**

For more information, see “How to Build a Package” on page 35.

2. **Install your package to verify that it installs correctly.**

See “How to Install a Package on a Standalone or Server” on page 74 or “How to Add a Package to a Diskless or AutoClient System’s Root File System” on page 75, if needed.

3. **Verify your package’s integrity.**

See “How to Verify the Integrity of Your Package” on page 77, “How to Obtain Information With the `pkgparam` Command” on page 79, and “How to Obtain Information With the `pkginfo` Command” on page 84, if needed.

4. **Remove the installed package from the system.**

See “How to Remove a Package” on page 85 or “How to Remove a Package From a Diskless or AutoClient System” on page 86, if needed.

5. Transfer the package (in package format) to a distribution medium.

To perform a basic translation, execute the following command:

```
$ pkgtrans device1 device2 [pkg-abbrev...]
```

<i>device1</i>	Is the name of the device where the package currently resides.
<i>device2</i>	Is the name of the device onto which the translated package will be written.
[<i>pkg-abbrev</i>]	Is one or more package abbreviations.

If no package names are given, all packages residing in *device1* are translated and written to *device2*.

Note - If more than one instance of a package resides on *device1*, you must use an instance identifier for the package. For a description of a package identifier, see “Defining a Package Instance” on page 15. When an instance of the package being translated already exists on *device2*, the `pkgtrans` command does not perform the translation. You can use the `-o` option to tell the `pkgtrans` command to overwrite any existing instances on the destination device and the `-n` option to tell it to create a new instance if one already exists. Note that this check does not apply when *device2* supports a datastream format.

Where to Go Next

At this point you have completed the steps necessary to design, build, verify, and transfer your package. If you are interested in looking at some case studies, see Chapter 5. If you are interested in advanced package design ideas, see Chapter 6.

Package Creation Case Studies

This chapter provides case studies to show packaging scenarios such as installing objects conditionally, determining at run time how many files to create, and modifying an existing data file during package installation and removal.

Each case study begins with a description, followed by a list of the packaging techniques used, a narrative description of the approach taken when using those techniques, and sample files and scripts associated with the case study.

This is a list of the case studies in this chapter:

- “Soliciting Input From the Administrator” on page 89
- “Creating a File at Installation and Saving It During Removal” on page 93
- “Defining Package Compatibilities and Dependencies” on page 97
- “Modifying a File Using Standard Classes and Class Action Scripts” on page 99
- “Modifying a File Using the `sed` Class and a `postinstall` Script” on page 103
- “Modifying a File Using the `build` Class” on page 105
- “Modifying `crontab` Files During Installation” on page 108
- “Installing and Removing a Driver With Procedure Scripts” on page 111
- “Installing a Driver Using the `sed` Class and Procedure Scripts” on page 114

Soliciting Input From the Administrator

The package in this case study has three types of objects. The administrator may choose which of the three types to install and where to locate the objects on the installation machine.

Techniques

This case study demonstrates the following techniques:

- Using parametric path names (variables in object path names) that are used to establish multiple base directories

For information on parametric path names, see “Parametric Path Names” on page 23.

- Using a `request` script to solicit input from the administrator

For information on `request` scripts, see “Writing a `request` Script” on page 55.

- Setting conditional values for an installation parameter

Approach

To set up the selective installation in this case study, you must complete the following tasks:

- Define a class for each type of object that can be installed.

In this case study, the three object types are the package executables, the man pages, and the `emacs` executables. Each type has its own class: `bin`, `man`, and `emacs`, respectively. Notice that in the `prototype` file all the object files belong to one of these three classes.

- Initialize the `CLASSES` parameter in the `pkginfo` file to null.

Normally when you define a class, you should list that class in the `CLASSES` parameter in the `pkginfo` file. Otherwise, no objects in that class are installed. For this case study, the parameter is initially set to null, which means no objects will get installed. The `CLASSES` parameter will be changed by the `request` script, based on the choices of the administrator. This way, the `CLASSES` parameter is set to only those object types that the administrator wants installed.

Note - Usually it is a good idea to set parameters to a default value. If this package had components common to all three object types, you could assign them to the `none` class, and then set the `CLASSES` parameter equal to `none`.

- Insert parametric path names into the `prototype` file.

The `request` script sets these environment variables to the value that the administrator provides. Then, the `pkgadd` command resolves these environment variables at installation time and knows where to install the package.

The three environment variables used in this example are set to their default in the `pkginfo` file and serve the following purposes:

- `$NCMPBIN` defines the location for object executables

- `$NCMPMAN` defines the location for man pages
- `$EMACS` defines the location for emacs executables

The example `prototype` file shows how to define the object path names with variables.

- Create a `request` script to ask the administrator which parts of the package should be installed and where they should be placed.

The `request` script for this package asks the administrator two questions:

- Should this part of the package be installed?

When the answer is yes, the appropriate class name is added to the `CLASSES` parameter. For example, when the administrator chooses to install the man pages associated with this package, the class `man` is added to the `CLASSES` parameter.

- If so, where should this part of the package be placed?

The appropriate environment variable is set to the response to this question. In the man page example, the variable `$NCMPMAN` is set to the response value.

These two questions are repeated for each of the three object types.

At the end of the `request` script, the parameters are made available to the installation environment for the `pkgadd` command and any other packaging scripts. The `request` script does this by writing these definitions to the file provided by the calling utility. For this case study, no other scripts are provided.

When looking at the `request` script for this case study, notice that the questions are generated by the data validation tools `ckyorn` and `ckpath`. For more information on these tools see the `ckyorn(1)` and `ckpath(1)` man pages.

Case Study Files

The `pkginfo` File

```
PKG=ncmp
NAME=NCMP Utilities
CATEGORY=application, tools
BASEDIR=/
ARCH=SPARC
VERSION=RELEASE 1.0, Issue 1.0
```

(continued)

```

CLASSES=""
NCMPBIN=/bin
NCMPMAN=/usr/man
EMACS=/usr/emacs

```

The prototype File

```

i pkginfo
i request
x bin $NCMPBIN 0755 root other
f bin $NCMPBIN/dired=/usr/ncmp/bin/dired 0755 root other
f bin $NCMPBIN/less=/usr/ncmp/bin/less 0755 root other
f bin $NCMPBIN/ttype=/usr/ncmp/bin/ttype 0755 root other
f emacs $NCMPBIN/emacs=/usr/ncmp/bin/emacs 0755 root other
x emacs $EMACS 0755 root other
f emacs $EMACS/ansii=/usr/ncmp/lib/emacs/macros/ansii 0644 root other
f emacs $EMACS/box=/usr/ncmp/lib/emacs/macros/box 0644 root other
f emacs $EMACS/crypt=/usr/ncmp/lib/emacs/macros/crypt 0644 root other
f emacs $EMACS/draw=/usr/ncmp/lib/emacs/macros/draw 0644 root other
f emacs $EMACS/mail=/usr/ncmp/lib/emacs/macros/mail 0644 root other
f emacs $NCMPMAN/man1/emacs.1=/usr/ncmp/man/man1/emacs.1 0644 root other
d man $NCMPMAN 0755 root other
d man $NCMPMAN/man1 0755 root other
f man $NCMPMAN/man1/dired.1=/usr/ncmp/man/man1/dired.1 0644 root other
f man $NCMPMAN/man1/ttype.1=/usr/ncmp/man/man1/ttype.1 0644 root other
f man $NCMPMAN/man1/less.1=/usr/ncmp/man/man1/less.1 0644 inixmr other

```

The request Script

```

trap 'exit 3' 15
# determine if and where general executables should be placed
ans='ckyornd -d y \
-p "Should executables included in this package be installed"
` || exit $?
if [ "$ans" = y ]
then
    CLASSES="$CLASSES bin"
    NCMPBIN='ckpath -d /usr/ncmp/bin -aoy \
-p "Where should executables be installed"
` || exit $?
fi
# determine if emacs editor should be installed, and if it should
# where should the associated macros be placed

```

(continued)


```

ans='ckyornd -d y \
-p "Should emacs editor included in this package be installed"
\' || exit $?
if [ "$ans" = y ]
then
    CLASSES="$CLASSES emacs"
    EMACS='ckpath -d /usr/ncmp/lib/emacs -aoy \
    -p "Where should emacs macros be installed"
    \' || exit $?
fi

```

Note that a `request` script can exit without leaving any files on the file system. For installations on Solaris versions prior to 2.5 (where no `checkinstall` script may be used) the `request` script is the correct place to test the file system in any manner necessary to ensure that the installation will succeed. When the `request` script exits with code 1, the installation will quit cleanly.

These example files show the use of parametric paths to establish multiple base directories. However, the preferred method involves use of the `BASEDIR` parameter which is managed and validated by the `pkgadd` command. Whenever multiple base directories are used, take special care to provide for installation of multiple versions and architectures on the same platform.

Creating a File at Installation and Saving It During Removal

This case study creates a database file at installation time and saves a copy of the database when the package is removed.

Techniques

This case study demonstrates the following techniques:

- Using classes and class action scripts to perform special actions on different sets of objects

For more information, see “Writing Class Action Scripts” on page 62.

- Using the `space` file to inform the `pkgadd` command that extra space is required to install this package properly

For more information on the `space` file, see “Reserving Additional Space on a Target System” on page 48.

- Using the `installf` command to install a file not defined in the `prototype` and `pkgmap` files

Approach

To create a database file at installation and save a copy on removal for this case study, you must complete the following tasks:

- Define three classes.

The package in this case study requires the following three classes be defined in the `CLASSES` parameter:

- The standard class of `none`, which contains a set of processes belonging in the subdirectory `bin`.
- The `admin` class, which contains an executable file `config` and a directory containing data files.
- The `cfgdata` class, which contains a directory.

- Make the package collectively relocatable.

Notice in the `prototype` file that none of the path names begins with a slash or an environment variable. This indicates that they are collectively relocatable.

- Calculate the amount of space the database file requires and create a `space` file to deliver with the package. This file notifies the `pkgadd` command that the package requires extra space and specifies how much.
- Create a class action script for the `admin` class (`i.admin`).

The sample script initializes a database using the data files belonging to the `admin` class. To perform this task, it does the following:

- Copies the source data file to its proper destination
- Creates an empty file named `config.data` and assigns it to a class of `cfgdata`
- Executes the `bin/config` command (delivered with the package and already installed) to populate the database file `config.data` using the data files belonging to the `admin` class

- Executes the `installf -f` command to finalize installation of `config.data`

No special action is required for the `admin` class at removal time so no removal class action script is created. This means that all files and directories in the `admin` class are removed from the system.

- Create a removal class action script for the `cfgdata` class (`r.cfgdata`).

The removal script makes a copy of the database file before it is deleted. No special action is required for this class at installation time, so no installation class action script is needed.

Remember that the input to a removal script is a list of path names to remove. Path names always appear in reverse alphabetical order. This removal script copies files to the directory named `$PKGSAV`. When all the path names have been processed, the script then goes back and removes all directories and files associated with the `cfgdata` class.

The outcome of this removal script is to copy `config.data` to `$PKGSAV` and then remove the `config.data` file and the data directory.

Case Study Files

The `pkginfo` File

```
PKG=krazy
NAME=KrAzY Applications
CATEGORY=applications
BASEDIR=/opt
ARCH=SPARC
VERSION=Version 1
CLASSES=none cfgdata admin
```

The prototype File

```
i pkginfo
i request
i i.admin
i r.cfgdata
d none bin 555 root sys
f none bin/process1 555 root other
f none bin/process2 555 root other
f none bin/process3 555 root other
```

(continued)

```
f admin bin/config 500 root sys
d admin cfg 555 root sys
f admin cfg/datafile1 444 root sys
f admin cfg/datafile2 444 root sys
f admin cfg/datafile3 444 root sys
f admin cfg/datafile4 444 root sys
d cfgdata data 555 root sys
```

The space File

```
# extra space required by config data which is
# dynamically loaded onto the system
data 500 1
```

The i.admin Class Action Script

```
# PKGINST parameter provided by installation service
# BASEDIR parameter provided by installation service
while read src dest
do
    cp $src $dest || exit 2
done
# if this is the last time this script will be executed
# during the installation, do additional processing here.
if [ "$1" = ENDOFCLASS ]
then
    # our config process will create a data file based on any changes
    # made by installing files in this class; make sure the data file
    # is in class 'cfgdata' so special rules can apply to it during
    # package removal.
    installf -c cfgdata $PKGINST $BASEDIR/data/config.data f 444 root
    sys || exit 2
    $BASEDIR/bin/config > $BASEDIR/data/config.data || exit 2
    installf -f -c cfgdata $PKGINST || exit 2
fi
exit 0
```

This illustrates a rare instance in which `installf` is appropriate in a class action script. Because a `space` file has been used to reserve room on a specific file system, this new file may be safely added even though it is not included in the `pkgmap` file.

The `r.cfgdata` Removal Script

```
# the product manager for this package has suggested that
# the configuration data is so valuable that it should be
# backed up to $PKGSAV before it is removed!
while read path
do
# path names appear in reverse lexical order.
    mv $path $PKGSAV || exit 2
    rm -f $path || exit 2
done
exit 0
```

Defining Package Compatibilities and Dependencies

The package in this case study uses optional information files to define package compatibilities and dependencies, and to present a copyright message during installation.

Techniques

This case study demonstrates the following techniques:

- Using the `copyright` file
- Using the `compver` file
- Using the `depend` file

For more information on these files, see “Creating Information Files” on page 43.

Approach

To meet the requirements in the description, you must:

- Create a `copyright` file.

A `copyright` file contains the ASCII text of a copyright message. The message shown in the sample file is displayed on the screen during package installation.

- Create a compver file.

The pkginfo file shown in the next figure defines this package version as version 3.0. The compver file defines version 3.0 as being compatible with versions 2.3, 2.2, 2.1, 2.1.1, 2.1.3 and 1.7.

- Create a depend file.

Files listed in a depend file must already be installed on the system when a package is installed. The example file has 11 packages which must already be on the system at installation time.

Case Study Files

The pkginfo File

```
PKG=case3
NAME=Case Study #3
CATEGORY=application
BASEDIR=/opt
ARCH=SPARC
VERSION=Version 3.0
CLASSES=none
```

The copyright File

```
Copyright (c) 1996 company_name
All Rights Reserved.
THIS PACKAGE CONTAINS UNPUBLISHED PROPRIETARY SOURCE CODE OF
company_name.
The copyright notice above does not evidence any
actual or intended publication of such source code
```

The compver File

```
Version 3.0
Version 2.3
Version 2.2
Version 2.1
Version 2.1.1
Version 2.1.3
Version 1.7
```

The depend File

```
P acu Advanced C Utilities
Issue 4 Version 1
P cc C Programming Language
Issue 4 Version 1
P dfm Directory and File Management Utilities
P ed Editing Utilities
P esg Extended Software Generation Utilities
Issue 4 Version 1
P graph Graphics Utilities
P rfs Remote File Sharing Utilities
Issue 1 Version 1
P rx Remote Execution Utilities
P sgs Software Generation Utilities
Issue 4 Version 1
P shell Shell Programming Utilities
P sys System Header Files
Release 3.1
```

Modifying a File Using Standard Classes and Class Action Scripts

This case study modifies an existing file during package installation using standard classes and class action scripts. It uses one of three modification methods. The other two methods are described in “Modifying a File Using the `sed` Class and a `postinstall` Script” on page 103 and “Modifying a File Using the `build` Class” on page 105. The file modified is `/sbin/inittab`.

Techniques

This case study demonstrates how to use installation and removal class action scripts. For more information, see “Writing Class Action Scripts” on page 62.

Approach

To modify `/sbin/inittab` during installation, using classes and class action scripts, you must complete the following tasks:

- Create a class.

Create a class called `inittab`. You must provide an installation and a removal class action script for this class. Define the `inittab` class in the `CLASSES` parameter in the `pkginfo` file.

- Create an `inittab` file.

This file contains the information for the entry that you will add to `/sbin/inittab`. Notice in the `prototype` file figure that `inittab` is a member of the `inittab` class and has a file type of `e` for `editable`.

- Create an installation class action script (`i.inittab`).

Remember that class action scripts must produce the same results each time they are executed. The class action script performs the following procedures:

- Checks if this entry has been added before
- If it has, removes any previous versions of the entry
- Edits the `inittab` file and adds the comment lines so you know where the entry is from
- Moves the temporary file back into `/sbin/inittab`
- Executes the `init q` command when it receives the `ENDOFCLASS` indicator

Note that the `init q` command can be performed by this installation script. A one-line `postinstall` script is not needed by this approach.

- Create a removal class action script (`r.inittab`).

The removal script is very similar to the installation script. The information added by the installation script is removed and the `init q` command is executed.

This case study is more complicated than the next one; see “Modifying a File Using the `sed` Class and a `postinstall` Script” on page 103. Instead of providing two files, three are needed and the delivered `/sbin/inittab` file is actually just a placeholder containing a fragment of the entry to be inserted. This could have been placed into the `i.inittab` file except that the `pkgadd` command must have a file to pass

to the `i.inittab` file. Also, the removal procedure must be placed into a separate file (`r.inittab`). While this method works fine, it is best reserved for cases involving very complicated installations of multiple files. See “Modifying crontab Files During Installation” on page 108.

The `sed` program used in “Modifying a File Using the `sed` Class and a `postinstall` Script” on page 103 supports multiple package instances since the comment at the end of the `inittab` entry is based on package instance. The case study in “Modifying a File Using the `build` Class” on page 105 shows a more streamlined approach to editing `/sbin/inittab` during installation.

Case Study Files

The `pkginfo` File

```
PKG=case5
NAME=Case Study #5
CATEGORY=applications
BASEDIR=/opt
ARCH=SPARC
VERSION=Version 1d05
CLASSES=inittab
```

The prototype File

```
i pkginfo
i i.inittab
i r.inittab
e inittab /sbin/inittab ? ? ?
```

The `i.inittab` Installation Class Action Script

```
# PKGINST parameter provided by installation service
while read src dest
do
# remove all entries from the table that
# associated with this PKGINST
sed -e "/^[^:]*:[^:]*:[^:]*:[^#]*#$PKGINST$/d" $dest >
/tmp/$$itab ||
exit 2
sed -e "s/#!/#$PKGINST" $src >> /tmp/$$itab ||
```

```

exit 2
mv /tmp/$$itab $dest ||
exit 2
done
if [ "$1" = ENDOFCLASS ]
then
/sbin/init q ||
exit 2
fi
exit 0

```

The `r.inittab` Removal Class Action Script

```

# PKGINST parameter provided by installation service
while read src dest
do
# remove all entries from the table that
# are associated with this PKGINST
sed -e "/^[^:]*:[^:]*:[^:]*:[^#]*#$PKGINST$/d" $dest >
/tmp/$$itab ||
exit 2
mv /tmp/$$itab $dest ||
exit 2
done
/sbin/init q ||
exit 2
exit 0

```

The `inittab` File

```

rb:023456:wait:/usr/robot/bin/setup

```

Modifying a File Using the `sed` Class and a `postinstall` Script

This case study modifies a file which exists on the installation machine during package installation. It uses one of three modification methods. The other two methods are described in “Modifying a File Using Standard Classes and Class Action Scripts” on page 99 and “Modifying a File Using the `build` Class” on page 105. The file modified is `/sbin/inittab`.

Techniques

This case study demonstrates the following techniques:

- Using the `sed` class
For more information on the `sed` class, see “The `sed` Class Script ” on page 66.
- Using a `postinstall` script
For more information on this script, see “Writing Procedure Scripts” on page 60.

Approach

To modify `/sbin/inittab` at the time of installation, using the `sed` class, you must complete the following tasks:

- Add the `sed` class script to the prototype file.
The name of a script must be the name of the file that will be edited. In this case, the file to be edited is `/sbin/inittab` and so the `sed` script is named `/sbin/inittab`. There are no requirements for the mode, owner, and group of a `sed` script (represented in the sample prototype by question marks). The file type of the `sed` script must be `e` (indicating that it is editable).
- Set the `CLASSES` parameter to include the `sed` class.
As shown in the example file, `sed` is the only class being installed. However, it could be one of any number of classes.
- Create a `sed` class action script.
Your package cannot deliver a copy of `/sbin/inittab` that looks the way you need it to, since `/sbin/inittab` is a dynamic file and you have no way of knowing how it will look at the time of package installation. However, using a `sed` script allows you to modify the `/sbin/inittab` file during package installation.

- Create a postinstall script.

You need to execute the `init q` command to inform the system that `/sbin/inittab` has been modified. The only place you can perform that action in this example is in a postinstall script. Looking at the example postinstall script, you will see that its only purpose is to execute the `init q` command.

This approach to editing `/sbin/inittab` during installation has one drawback; you have to deliver a full script (the postinstall script) simply to perform the `init q` command.

Case Study Files

The pkginfo File

```
PKG=case4
NAME=Case Study #4
CATEGORY=applications
BASEDIR=/opt
ARCH=SPARC
VERSION=Version 1d05
CLASSES=sed
```

The prototype File

```
i pkginfo
i postinstall
e sed /sbin/inittab ? ? ?
```

The sed Class Action Script (`/sbin/inittab`)

```
!remove
# remove all entries from the table that are associated
# with this package, though not necessarily just
# with this package instance
/^[^:]*:[^:]*:[^:]*:[^#]*#ROBOT$/d
!install
# remove any previous entry added to the table
# for this particular change
/^[^:]*:[^:]*:[^:]*:[^#]*#ROBOT$/d
# add the needed entry at the end of the table;
```

```
# sed(1) does not properly interpret the '$a'
# construct if you previously deleted the last
# line, so the command
# $a\
# rb:023456:wait:/usr/robot/bin/setup #ROBOT
# will not work here if the file already contained
# the modification. Instead, you will settle for
# inserting the entry before the last line!
$i\
rb:023456:wait:/usr/robot/bin/setup #ROBOT
```

The postinstall Script

```
# make init re-read inittab
/sbin/init q ||
exit 2
exit 0
```

Modifying a File Using the build Class

This case study modifies a file which exists on the installation machine during package installation. It uses one of three modification methods. The other two methods are described in “Modifying a File Using Standard Classes and Class Action Scripts” on page 99 and “Modifying a File Using the sed Class and a postinstall Script” on page 103. The file modified is `/sbin/inittab`.

Techniques

This case study demonstrates how to use the `build` class. For more information on the `build` class, see “The build Class Script ” on page 67.

Approach

This approach to modifying `/sbin/inittab` uses the build class. A build class script is executed as a shell script and its output becomes the new version of the file being executed. In other words, the data file `/sbin/inittab` that is delivered with this package will be executed and the output of that execution will become `/sbin/inittab`.

The build class script is executed during package installation and package removal. The argument `install` is passed to the file if it is being executed at installation time. Notice in the sample build class script that installation actions are defined by testing for this argument.

To edit `/sbin/inittab` using the build class, you must complete the following tasks:

- Define the build file in the `prototype` file.

The entry for the build file in the `prototype` file should place it in the build class and define its file type as `e`. Be certain that the `CLASSES` parameter in the `pkginfo` file is defined as `build`.

- Create the build class script.

The sample build class script performs the following procedures:

- Edits the `/sbin/inittab` file to remove any existing changes for this package. Notice that the file name `/sbin/inittab` is hardcoded into the `sed` command.
- If the package is being installed, adds the new line to the end of `/sbin/inittab`. A comment tag is included in this new entry to describe where that entry came from.
- Executes the `init q` command.

This solution addresses the drawbacks described in the case studies in “Modifying a File Using Standard Classes and Class Action Scripts” on page 99 and “Modifying a File Using the `sed` Class and a `postinstall` Script” on page 103. Only one short file is needed (beyond the `pkginfo` and `prototype` files). The file works with multiple instances of a package since the `PKGINST` parameter is used, and no `postinstall` script is required since the `init q` command can be executed from the build class script.

Case Study Files

The pkginfo File

```
PKG=case6
NAME=Case Study #6
CATEGORY=applications
BASEDIR=/opt
ARCH=SPARC
VERSION=Version 1d05
CLASSES=build
```

The prototype File

```
i pkginfo
e build /sbin/inittab ? ? ?
```

The Build File

```
# PKGINST parameter provided by installation service
# remove all entries from the existing table that
# are associated with this PKGINST
sed -e "/^[^:]*:[^:]*:[^:]*:[^#]*#$PKGINST$/d" /sbin/inittab ||
exit 2
if [ "$1" = install ]
then
# add the following entry to the table
echo "rb:023456:wait:/usr/robot/bin/setup #$PKGINST" ||
exit 2
fi
/sbin/init q ||
exit 2
exit 0
```

Modifying `crontab` Files During Installation

This case study modifies `crontab` files during package installation.

Techniques

This case study demonstrates the following techniques:

- Using classes and class action scripts
For more information, see “Writing Class Action Scripts” on page 62.
- Using the `crontab` command within a class action script

Approach

The most efficient way to edit more than one file during installation is to define a class and provide a class action script. If you used the `build class` approach, you would need to deliver one `build class` script for each `crontab` file edited. Defining a `cron` class provides a more general approach. To edit `crontab` files with this approach, you must:

- Define the `crontab` files that are to be edited in the `prototype` file.
Create an entry in the `prototype` file for each `crontab` file that will be edited. Define the class as `cron` and the file type as `e` for each file. Use the actual name of the file to be edited.
- Create the `crontab` files for the package.
These files contain the information you want added to the existing `crontab` files of the same name.
- Create an installation class action script for the `cron` class.
The sample `i.cron` script performs the following procedures:
 - Determines the user ID (UID).
The `i.cron` script sets the variable `user` to the base name of the `cron` class script being processed. That name is the UID. For example, the base name of `/var/spool/cron/crontabs/root` is `root`, which is also the UID.
 - Executes `crontab` using the UID and the `-l` option.

Using the `-l` option tells `crontab` to send the contents of the `crontab` file for the defined user to the standard output.

- Pipes the output of the `crontab` command to a `sed` script that removes any previous entries added with this installation technique.
- Puts the edited output into a temporary file.
- Adds the data file for the root UID (that was delivered with the package) to the temporary file and adds a tag so you will know where these entries came from.
- Executes `crontab` with the same UID and gives it the temporary file as input.
- Create a removal class action script for the `cron` class.

The `r.cron` script is the same as the installation script except there is no procedure to add information to the `crontab` file.

These procedures are performed for every file in the `cron` class.

Case Study Files

The `pkginfo` Command

```
PKG=case7
NAME=Case Study #7
CATEGORY=application
BASEDIR=/opt
ARCH=SPARC
VERSION=Version 1.0
CLASSES=cron
```

The prototype File

```
i pkginfo
i i.cron
i r.cron
e cron /var/spool/cron/crontabs/root ? ? ?
e cron /var/spool/cron/crontabs/sys ? ? ?
```

The i.cron Installation Class Action Script

```
# PKGINST parameter provided by installation service
while read src dest
do
user=`basename $dest` ||
exit 2
(crontab -l $user |
sed -e "/#PKGINST$/d" > /tmp/$$crontab) ||
exit 2
sed -e "s/#PKGINST/" $src >> /tmp/$$crontab ||
exit 2
crontab $user < /tmp/$$crontab ||
exit 2
rm -f /tmp/$$crontab
done
exit 0
```

The r.cron Removal Class Action Script

```
# PKGINST parameter provided by installation service
while read path
do
user=`basename $path` ||
exit 2
(crontab -l $user |
sed -e "/#PKGINST$/d" > /tmp/$$crontab) ||
exit 2
crontab $user < /tmp/$$crontab ||
exit 2
rm -f /tmp/$$crontab
done
exit
```

crontab File #1

```
41,1,21 * * * * /usr/lib/uucp/uudemon.hour > /dev/null
45 23 * * * ulimit 5000; /usr/bin/su uucp -c
"/usr/lib/uucp/uudemon.cleanup" >
/dev/null 2>&1
11,31,51 * * * * /usr/lib/uucp/uudemon.poll > /dev/null
```

crontab File #2

```
0 * * * 0-6 /usr/lib/sa/sa1
20,40 8-17 * * 1-5 /usr/lib/sa/sa1
5 18 * * 1-5 /usr/lib/sa/sa2 -s 8:00 -e 18:01 -i 1200 -A
```

Note - If editing of a group of files will increase total file size by more than 10K, supply a `space` file so the `pkgadd` command can allow for this increase. For more information on the `space` file, see “Reserving Additional Space on a Target System” on page 48.

Installing and Removing a Driver With Procedure Scripts

This package installs a driver.

Techniques

This case study demonstrates the following techniques:

- Installing and loading a driver with a `postinstall` script
- Unloading a driver with a `preremove` script

For more information on these scripts, see “Writing Procedure Scripts” on page 60.

Approach

- Create a `request` script.

The `request` script determines where the administrator wants the driver objects to be installed, by questioning the administrator and assigning the answer to the `$KERNDIR` parameter.

The script ends with a routine to make the two parameters `CLASSES` and `KERNDIR` available to the installation environment and the `postinstall` script.

- Create a `postinstall` script.

The `postinstall` script actually performs the driver installation. It is executed after the two files `buffer` and `buffer.conf` have been installed. The `postinstall` file shown for this example performs the following actions:

- Uses the `add_drv` command to load the driver into the system
- Creates a link for the device using the `installf` command
- Finalizes the installation using the `installf -f` command
- Create a `preremove` script.
The `preremove` script uses the `rem_drv` command to unload the driver from the system, and then removes the link `/dev/buffer0`.

Case Study Files

The `pkginfo` File

```
PKG=bufdev
NAME=Buffer Device
CATEGORY=system
BASEDIR=/
ARCH=INTEL
VERSION=Software Issue #19
CLASSES=none
```

The `prototype` File

To install a driver at the time of installation, you must include the object and configuration files for the driver in the `prototype` file.

In this example, the executable module for the driver is named `buffer`; the `add_drv` command operates on this file. The kernel uses the configuration file, `buffer.conf`, to help configure the driver.

```
i pkginfo
i request
i postinstall
i preremove
f none $KERNDIR/buffer 444 root root
f none $KERNDIR/buffer.conf 444 root root
```

(continued)

Looking at the prototype file for this example, notice the following:

- Since no special treatment is required for the package objects, you can put them into the standard none class. The CLASSES parameter is set to none in the pkginfo file.
- The path names for `buffer` and `buffer.conf` begin with the variable `$KERNDIR`. This variable is set in the request script and allows the administrator to decide where the driver files should be installed. The default directory is `/kernel/drv`.
- There is an entry for the `postinstall` script (the script that will perform the driver installation).
- Note that a `BASEDIR` is specified even though this is an absolute package. This is because the `pkgadd` command does not know that `$KERNDIR` is going to resolve to an absolute path until after the `BASEDIR` has been evaluated.

The request Script

```
trap 'exit 3' 15
# determine where driver object should be placed; location
# must be an absolute path name that is an existing directory
KERNDIR=`ckpath -aoy -d /kernel/drv -p \
  ``Where do you want the driver object installed`` || exit $?

# make parameters available to installation service, and
# so to any other packaging scripts
cat >$1 <<!

CLASSES='$CLASSES'
KERNDIR='$KERNDIR'
!
exit 0
```

The postinstall Script

```
# KERNDIR parameter provided by 'request' script
err_code=1                # an error is considered fatal
# Load the module into the system
cd $KERNDIR
add_drv -m '* 0666 root sys' buffer || exit $err_code
# Create a /dev entry for the character node
installf $PKGINST /dev/buffer0=/devices/eisa/buffer*:0 s
installf -f $PKGINST
```

The preremove Script

```
err_code=1                # an error is considered fatal
# Unload the driver
rem_drv buffer || exit $err_code
# remove /dev file
removef $PKGINST /dev/buffer0 ; rm /dev/buffer0
removef -f $PKGINST
```

Installing a Driver Using the sed Class and Procedure Scripts

This case study describes how to install a driver using the sed class and procedure scripts. It is also different from the previous case study (see “Installing and Removing a Driver With Procedure Scripts” on page 111) because this package is made up of both absolute and relocatable objects.

Techniques

This case study demonstrates the following techniques:

- Building a prototype file with both absolute and relocatable objects

For more information on building a prototype file, see “Creating a prototype File” on page 20.

- Using the sed class

For more information on the `sed` class, see “The `sed` Class Script ” on page 66.

- Using a `postinstall` script

For more information on this script, see “Writing Procedure Scripts” on page 60.

- Using a `preremove` script

For more information on this script, see “Writing Procedure Scripts” on page 60.

- Using a `copyright` file

For more information on this file, see “Writing a Copyright Message ” on page 47.

Approach

- Create a `prototype` file containing both absolute and relocatable package objects.

This is discussed in detail in “The `prototype` File” on page 116.

- Add the `sed` class script to the `prototype` file.

The name of a script must be the name of the file that will be edited. In this case, the file to be edited is `/etc/devlink.tab` and so the `sed` script is named `/etc/devlink.tab`. There are no requirements for the mode, owner, and group of a `sed` script (represented in the sample `prototype` by question marks). The file type of the `sed` script must be `e` (indicating that it is editable).

- Set the `CLASSES` parameter to include the `sed` class.

- Create a `sed` class action script (`/etc/devlink.tab`).

- Create a `postinstall` script.

The `postinstall` script needs to execute the `add_drv` command to add the device driver to the system.

- Create a `preremove` script.

The `preremove` script needs to execute the `rem_drv` command to remove the device driver from the system, prior to the package being removed.

- Create a `copyright` file.

A `copyright` file contains the ASCII text of a copyright message. The message shown in the sample file is displayed on the screen during package installation.

Case Study Files

The pkginfo File

```
PKG=SUNWsst
NAME=Simple SCSI Target Driver
VERSION=1
CATEGORY=system
ARCH=sparc
VENDOR=Sun Microsystems
BASEDIR=/opt
CLASSES=sed
```

The prototype File

For example, this case study uses the hierarchical layout of the package objects shown in Figure 5-1.

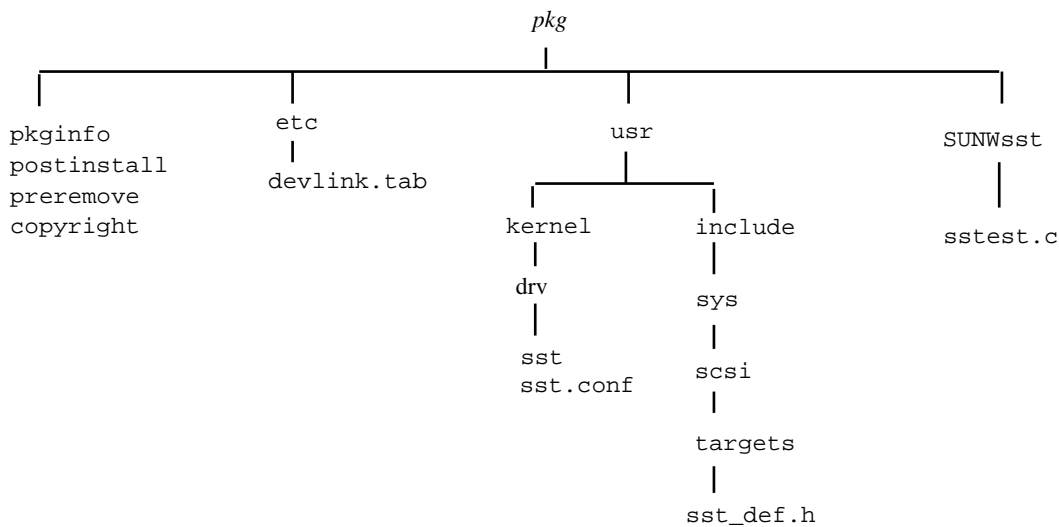


Figure 5-1 Hierarchical Package Directory Structure

The package objects are installed in the same places as they are in the *pkg* directory above. The driver modules (*sst* and *sst.conf*) are installed into */usr/kernel/drv* and the include file is installed into */usr/include/sys/scsi/targets*. The *sst*, *sst.conf*, and *sst_def.h* files are absolute objects. The test program, *sstest.c*, and its directory *SUNWsst* are relocatable; their installation location is set by the *BASEDIR* parameter.

The remaining components of the package (all the control files) go in the top directory of the package on the development machine, except the *sed* class script. This is called *devlink.tab* after the file it modifies, and goes into *etc*, the directory containing the real *devlink.tab* file.

From the `pkg` directory, run the `pkgproto` command as follows:

```
find usr SUNWsst -print | pkgproto > prototype
```

The output from the above command looks like this:

```
d none usr 0775 pms mts
d none usr/include 0775 pms mts
d none usr/include/sys 0775 pms mts
d none usr/include/sys/scsi 0775 pms mts
d none usr/include/sys/scsi/targets 0775 pms mts
f none usr/include/sys/scsi/targets/sst_def.h 0444 pms mts
d none usr/kernel 0775 pms mts
d none usr/kernel/drv 0775 pms mts
f none usr/kernel/drv/sst 0664 pms mts
f none usr/kernel/drv/sst.conf 0444 pms mts
d none SUNWsst 0775 pms mts
f none SUNWsst/sstest.c 0664 pms mts
```

This prototype file is not yet complete. To complete this file, you need to make the following modifications:

- Insert the entries for the control files (file type `i`), because they have a different format than the other package objects.
- Remove entries for directories that already exist on the target system.
- Change the access permission and ownership for each entry.
- Prepend a slash to the absolute package objects.

This is the final prototype file:

```
i pkginfo
i postinstall
i preremove
i copyright
e sed /etc/devlink.tab ? ? ?
f none /usr/include/sys/scsi/targets/sst_def.h 0644 bin bin
f none /usr/kernel/drv/sst 0755 root sys
f none /usr/kernel/drv/sst.conf 0644 root sys
d none SUNWsst 0775 root sys
f none SUNWsst/sstest.c 0664 root sys
```

The question marks in the entry for the `sed` script indicate that the access permissions and ownership of the existing file on the installation machine should not be changed.

The sed Class Action Script (/etc/devlink.tab)

In the driver example, a sed class script is used to add an entry for the driver to the file /etc/devlink.tab. This file is used by the devlinks command to create symbolic links from /dev into /devices. This is the sed script:

```
# sed class script to modify /etc/devlink.tab
!install
/name=sst;/d
$i\
type=ddi_pseudo;name=sst;minor=character rsst\\A1

!remove
/name=sst;/d
```

The pkgrm command does not run the removal part of the script. You may need to add a line to the preremove script to run sed directly to remove the entry from /etc/devlink.tab.

The postinstall Installation Script

In this example, all the script needs to do is run the add_drv command.

```
# Postinstallation script for SUNWsst
# This does not apply to a client.
if [ $PKG_INSTALL_ROOT = "/" -o -z $PKG_INSTALL_ROOT ]; then
    SAVEBASE=$BASEDIR
    BASEDIR=''; export BASEDIR
    /usr/sbin/add_drv sst
    STATUS=$?
    BASEDIR=$SAVEBASE; export BASEDIR
    if [ $STATUS -eq 0 ]
    then
        exit 20
    else
        exit 2
    fi
else
    echo "This cannot be installed onto a client."
    exit 2
fi
```

Note - This example will probably not work correctly if you install it onto a diskless client from a server, since there is no reliable way to run the `add_drv` and `rem_drv` commands on that client from the `pkgadd` command executing on the server. You may be better off splitting the package on the root (/) and /usr boundaries.

The `add_drv` command uses the `BASEDIR` parameter, so the script has to unset `BASEDIR` before running the command, and restore it afterwards.

One of the actions of the `add_drv` command is to run `devlinks`, which uses the entry placed in `/etc/devlink.tab` by the `sed` class script to create the `/dev` entries for the driver.

The exit code from the `postinstall` script is significant. The exit code 20 tells the `pkgadd` command to tell the user to reboot the system (necessary after installing a driver), and the exit code 2 tells the `pkgadd` command to tell the user that the installation partially failed.

The preremove Removal Script

In the case of this driver example, it removes the links in `/dev` and runs the `rem_drv` command on the driver.

```
# Pre removal script for the sst driver
echo ``Removing /dev entries``
/usr/bin/rm -f /dev/rsst*

echo ``Deinstalling driver from the kernel``
SAVEBASE=$BASEDIR
BASEDIR=''; export BASEDIR
/usr/sbin/rem_drv sst
BASEDIR=$SAVEBASE; export BASEDIR

exit
```

The script removes the `/dev` entries itself; the `/devices` entries are removed by the `rem_drv` command.

The copyright File

This is a simple ASCII file containing the text of a copyright notice. The notice is displayed at the beginning of package installation exactly as it appears in the file.

Copyright (c) 1996 Drivers-R-Us, Inc.
10 Device Drive, Thebus, IO 80586

All rights reserved. This product and related documentation is protected by copyright and distributed under licenses restricting its use, copying, distribution and decompilation. No part of this product or related documentation may be reproduced in any form by any means without prior written authorization of Drivers-R-Us and its licensors, if any.

Advanced Package Creation Techniques

The full capabilities of System V packaging as implemented in the Solaris operating environment provide a powerful tool for the installation of software products. As a package designer, you can take advantage of these capabilities. Packages that are not part of the Solaris operating environment (unbundled packages) may use the class mechanism to customize server/client installations. Relocatable packages can be designed to accommodate the desires of the administrator. A complex product can be delivered as a set of composite packages that automatically resolve package dependencies. Upgrading and patching may be customized by the package designer. Patched packages can be delivered in the same way as unpatched packages, and the backout archives can also be included in the product.

This is a list of the overview information in this chapter.

- “Specifying the Base Directory” on page 121
- “Accommodating Relocation” on page 126
- “Supporting Relocation in a Heterogeneous Environment” on page 135
- “Making Packages Installable Remotely” on page 146
- “Patching Packages” on page 148
- “Upgrading Packages” on page 171

Specifying the Base Directory

You can use several methods to specify where a package will be installed, and it is important to be able to change the installation base dynamically at install time. If this is accomplished correctly, an administrator can install multiple versions and multiple architectures without complications.

This section discusses common methods first, followed by approaches that enhance installations to heterogeneous systems.

The Administrative Defaults File

Administrators responsible for installing packages can use administration files to control package installation. However, as a package designer, you need to know about administration files and how an administrator can alter your intended package installation.

An administration file tells the `pkgadd` command whether to perform any of the checks or prompts that it normally does. Consequently, administrators should fully understand a package's installation process and the scripts involved before using administration files.

A basic administrative defaults file is shipped with the SunOS operating system in `/var/sadm/install/admin/default`. This is the file that establishes the most basic level of administrative policy as regards the installation of software products. The file looks like this as shipped:

```
#ident "@(#)default
1.4 92/12/23 SMI" /* SVr4.0 1.5.2.1 */
mail=
instance=unique
partial=ask
runlevel=ask
idepend=ask
rdepend=ask
space=ask
setuid=ask
conflict=ask
action=ask
basedir=default
```

The administrator may edit this file to establish new default behaviors, or create a different administration file and specify its existence by using the `-a` option to the `pkgadd` command.

Eleven parameters can be defined in an administration file, but not all need to be defined. For more information, see the `admin(4)` man page.

The `basedir` parameter specifies how the base directory will be derived when a package is installed. Most administrators leave this as `default`, but `basedir` can be set to one of the following:

- `ask`, which means always ask the administrator for a base directory
- An absolute path name

- An absolute path name containing the `$PKGINST` construction, which means always install to a base directory derived from the package instance

Note - If the `pkgadd` command is called with the argument `-a none`, it always asks the administrator for a base directory. Unfortunately, this also sets *all* parameters in the file to the default value of `quit`, which can result in additional problems.

Becoming Comfortable With Uncertainty

An administrator has control over all packages being installed on a system by using an administration file. Unfortunately, an alternate administrative defaults file is often provided by the *package designer*, bypassing the wishes of the administrator.

Package designers sometimes include an alternate administration file so that they, not the administrator, control a package's installation. Because the `basedir` entry in the administrative defaults file overrides all other base directories, it provides a simple method for selecting the appropriate base directory at install time. In all versions of the Solaris operating environment prior to release 2.5, this was considered the simplest method for controlling the base directory.

However, it is necessary for you to accept the administrator's desires regarding the installation of the product. Providing a temporary administrative defaults file for the purpose of controlling the installation leads to mistrust on the part of administrators. You should use a `request` script and `checkinstall` script to control these installations under the supervision of the administrator. If the `request` script faithfully involves the administrator in the process, System V packaging will serve both administrators and package designers.

Using the BASEDIR Parameter

The `pkginfo` file for any relocatable package must include a default base directory in the form of an entry like this:

`BASEDIR=absolute_path`

This is only the default base directory; it can be changed by the administrator during installation.

While some packages require more than one base directory, the advantage to using this parameter to position the package is because the base directory is guaranteed to be in place and writable as a valid directory by the time installation begins. The correct path to the base directory for the server and client is available to all procedure scripts in the form of reserved environment variables, and the `pkginfo -r SUNWstuf` command displays the current installation base for the package.

In the `checkinstall` script, `BASEDIR` is the parameter exactly as defined in the `pkginfo` file (it has not been conditioned yet). In order to inspect the target base directory, the `${PKG_INSTALL_ROOT}$BASEDIR` construction is required. This means that the `request` or `checkinstall` script can change the value of `BASEDIR` in the installation environment with predictable results. By the time the `preinstall` script is called, the `BASEDIR` parameter is the fully conditioned pointer to the actual base directory on the target system, even if the system is a client.

Note - The `request` script utilizes the `BASEDIR` parameter differently for different releases of the SunOS operating system. In order to test a `BASEDIR` parameter in a `request` script, the following code should be used to determine the actual base directory in use.

```
# request script
constructs base directory
if [ ${CLIENT_BASEDIR} ]; then
    LOCAL_BASE=$BASEDIR
else
    LOCAL_BASE=${PKG_INSTALL_ROOT}$BASEDIR
fi
```

Using Parametric Base Directories

If a package requires multiple base directories, you can establish them with parametric path names. This method has become quite popular, although it has the following drawbacks.

- A package with parametric path names usually behaves like an absolute package but is treated by the `pkgadd` command like a relocatable package. The `BASEDIR` parameter must be defined even if it is not used.
- The administrator cannot ascertain the installation base for the package using the System V utilities (the `pkginfo -r` command will not work).
- The administrator cannot use the established method to relocate the package (it is called relocatable but it acts absolute).
- Multiple architecture or multiple version installations require contingency planning for each of the target base directories which often means multiple complex class action scripts.

While the parameters that determine the base directories are defined in the `pkginfo` file, they may be modified by the `request` script. That is one of the primary reasons

for the popularity of this approach. The drawbacks, however are chronic and you should consider this configuration a last resort.

Example—Using Parametric Base Directories

The pkginfo File

```
# pkginfo file
PKG=SUNWstuf
NAME=software stuff
ARCH=sparc
VERSION=1.0.0,REV=1.0.4
CATEGORY=application
DESC=a set of utilities that do stuff
BASEDIR=/
EZDIR=/usr/stuf/EZstuf
HRDDIR=/opt/SUNWstuf/HRDstuf
VENDOR=Sun Microsystems, Inc.
HOTLINE=Please contact your local service provider
EMAIL=
MAXINST=1000
CLASSES=none
PSTAMP=hubert930603141632
```

The pkgmap File

```
: 1 1758
1 d none $EZDIR 0775 root bin
1 f none $EZDIR/dirdel 0555 bin bin 40 773 751310229
1 f none $EZDIR/usrdel 0555 bin bin 40 773 751310229
1 f none $EZDIR/filedel 0555 bin bin 40 773 751310229
1 d none $HRDDIR 0775 root bin
1 f none $HRDDIR/mksmart 0555 bin bin 40 773 751310229
1 f none $HRDDIR/mktall 0555 bin bin 40 773 751310229
1 f none $HRDDIR/mkcute 0555 bin bin 40 773 751310229
1 f none $HRDDIR/mkeasy 0555 bin bin 40 773 751310229
1 d none /etc ? ? ?
1 d none /etc/rc2.d ? ? ?
1 f none /etc/rc2.d/S70dostuf 0744 root sys 450 223443
1 i pkginfo 348 28411 760740163
1 i postinstall 323 26475 751309908
1 i postremove 402 33179 751309945
1 i preinstall 321 26254 751310019
1 i preremove 320 26114 751309865
```

(continued)

Managing the Base Directory

Any package that is available in multiple versions or for multiple architectures should be designed to *walk* the base directory, if needed. Walking a base directory means that if a previous version or a different architecture of the package being installed already exists in the base directory, the package being installed resolves this issue, perhaps by creating a new base directory with a slightly different name. The `request` and `checkinstall` scripts in the Solaris 2.5 and later releases have the ability to modify the `BASEDIR` environment variable. This is not true for any prior version of the Solaris operating environment.

Even in older versions of the Solaris operating environment, the `request` script had the authority to redefine directories within the installation base. The `request` script can do this in a way that still supports most administrative preferences.

Accommodating Relocation

While you can select base directories for various packages that are guaranteed unique to an architecture and version, this leads to unnecessary levels of directory hierarchy. For example, for a product designed for SPARC and x86-based processors, you could organize the base directories by processor and version as shown in Table 6-1.

TABLE 6-1

Base Directory	Version and Processor
<code>/opt/SUNWstuf/sparc/1.0</code>	Version 1.0, SPARC
<code>/opt/SUNWstuf/sparc/1.2</code>	Version 1.2, SPARC
<code>/opt/SUNWstuf/x86/1.0</code>	Version 1.0, x86

This is okay and it does work, but you are treating names and numbers as though they mean something to the administrator. A better approach is to do this automatically *after* explaining it to the administrator and obtaining permission.

This means that you can do the whole job in the package without requiring the administrator to do it manually. You can assign the base directory arbitrarily and then transparently establish the appropriate client links in a `postinstall` script. You can also use the `pkgadd` command to install all or part of the package to the clients in the `postinstall` script. You can even ask the administrator which users or clients need to know about this package and automatically update `PATH` environment variables and `/etc` files. This is completely acceptable as long as whatever the package does upon installation, it undoes upon removal.

Walking Base Directories

You can take advantage of two methods for controlling the base directory at install time. The first is best for new packages that will install only to Solaris 2.5 and later releases; it provides very useful data for the administrator and supports multiple installed versions and architectures and requires minimal special work. The second method can be used by any package and makes use of the `request` script's inherent control over build parameters to ensure successful installations.

Using the BASEDIR Parameter

The `checkinstall` script can select the appropriate base directory at install time, which means that the base directory can be placed very low in the directory tree. This example increments the base directory sequentially, leading to directories of the form `/opt/SUNWstuf`, `/opt/SUNWstuf.1`, and `/opt/SUNWstuf.2`. The administrator can use the `pkginfo` command to determine which architecture and version are installed in each base directory.

If the `SUNWstuf` package (containing a set of utilities that do stuff) uses this method, its `pkginfo` and `pkgmap` files would look like this.

The pkginfo File

```
# pkginfo file
PKG=SUNWstuf
NAME=software stuff
ARCH=sparc
VERSION=1.0.0,REV=1.0.4
CATEGORY=application
DESC=a set of utilities that do stuff
BASEDIR=/opt/SUNWstuf
```

(continued)

```

VENDOR=Sun Microsystems, Inc.
HOTLINE=Please contact your local service provider
EMAIL=
MAXINST=1000
CLASSES=none daemon
PSTAMP=hubert930603141632

```

The pkgmap File

```

: 1 1758
1 d none EZstuf 0775 root bin
1 f none EZstuf/dirdel 0555 bin bin 40 773 751310229
1 f none EZstuf/usrdel 0555 bin bin 40 773 751310229
1 f none EZstuf/filedel 0555 bin bin 40 773 751310229
1 d none HRDstuf 0775 root bin
1 f none HRDstuf/mksmart 0555 bin bin 40 773 751310229
1 f none HRDstuf/mktall 0555 bin bin 40 773 751310229
1 f none HRDstuf/mkcute 0555 bin bin 40 773 751310229
1 f none HRDstuf/mkeasy 0555 bin bin 40 773 751310229
1 d none /etc ? ? ?
1 d none /etc/rc2.d ? ? ?
1 f daemon /etc/rc2.d/S70dostuf 0744 root sys 450 223443
1 i pkginfo 348 28411 760740163
1 i postinstall 323 26475 751309908
1 i postremove 402 33179 751309945
1 i preinstall 321 26254 751310019
1 i preremove 320 26114 751309865
1 i i.daemon 509 39560 752978103
1 i r.daemon 320 24573 742152591

```

Example—Analysis Scripts That Walk a BASEDIR

Assume that the x86 version of SUNWstuf is already installed on the server in /opt/SUNWstuf. When the administrator uses the pkgadd command to install the SPARC version, the request script needs to detect the existence of the x86 version and interact with the administrator regarding the installation.

Note - The base directory could be walked without administrator interaction in a checkinstall script, but if arbitrary operations like this happen too often, administrators lose confidence in the process.

The request script and checkinstall script for a package that handle this situation might look like this.

The request Script

```
# request script
for SUNWstuf to walk the BASEDIR parameter.

PATH=/usr/sadm/bin:${PATH} # use admin utilities

GENMSG="The base directory $LOCAL_BASE already contains a \
different architecture or version of $PKG."

OLDMSG="If the option \"-a none\" was used, press the \
key and enter an unused base directory when it is requested."

OLDPROMPT="Do you want to overwrite this version? "

OLDHELP="\n\"y\" will replace the installed package, \n\" will \
stop the installation."

SUSPEND="Suspending installation at user request using error \
code 1."

MSG="This package could be installed at the unused base directory $WRKNG_BASE."

PROMPT="Do you want to use to the proposed base directory? "

HELP="A response of \"y\" will install to the proposed directory and continue, \
\n\" will request a different directory. If the option \"-a none\" was used, \
press the key and enter an unused base directory when it is requested."

DIRPROMPT="Select a preferred base directory ($WRKNG_BASE) "

DIRHELP="The package $PKG will be installed at the location entered."

NUBD_MSG="The base directory has changed. Be sure to update \
any applicable search paths with the actual location of the \
binaries which are at $WRKNG_BASE/EZstuf and $WRKNG_BASE/HRDstuf."

OldSolaris=""
Changed=""
Suffix="0"

#
# Determine if this product is actually installed in the working
# base directory.
#
Product_is_present () {
    if [ -d $WRKNG_BASE/EZstuf -o -d $WRKNG_BASE/HRDstuf ]; then
        return 1
    else
        return 0
    fi
}
```

(continued)

```

}

if [ ${BASEDIR} ]; then
# This may be an old version of Solaris. In the latest Solaris
# CLIENT_BASEDIR won't be defined yet. In older version it is.
if [ ${CLIENT_BASEDIR} ]; then
    LOCAL_BASE=${BASEDIR}
    OldSolaris="true"
else # The base directory hasn't been processed yet
    LOCAL_BASE=${PKG_INSTALL_ROOT}${BASEDIR}
fi

WRKNG_BASE=${LOCAL_BASE}

# See if the base directory is already in place and walk it if
# possible
while [ -d ${WRKNG_BASE} -a Product_is_present ]; do
# There is a conflict
# Is this an update of the same arch & version?
if [ ${UPDATE} ]; then
    exit 0 # It's out of our hands.
else
# So this is a different architecture or
# version than what is already there.
# Walk the base directory
Suffix='expr $Suffix + 1'
WRKNG_BASE=${LOCAL_BASE}.${Suffix}
Changed="true"
fi
done

# So now we can propose a base directory that isn't claimed by
# any of our other versions.
if [ $Changed ]; then
    puttext "$GENMSG"
    if [ $OldSolaris ]; then
        puttext "$OLDMSG"
        result='ckyornd -Q -d "a" -h "$OLDHELP" -p "$OLDPROMPT"'
        if [ $result="n" ]; then
            puttext "$SUSPEND"
            exit 1 # suspend installation
        else
            exit 0
        fi
    else # The latest functionality is available
        puttext "$MSG"
        result='ckyornd -Q -d "a" -h "$HELP" -p "$PROMPT"'
        if [ $? -eq 3 ]; then
            echo quitinstall >> $1
            exit 0
        fi

        if [ $result="n" ]; then
            WRKNG_BASE='ckpath -ayw -d "$WRKNG_BASE" \

```

(continued)

```

        -h "$DIRHELP" -p "$DIRPROMPT" `
    else if [ $result="a" ]
        exit 0
    fi
    fi
    echo "BASEDIR=$WRKNG_BASE" >> $1
    puttext "$NUBD_MSG"
fi
fi
exit 0

```

The checkinstall Script

```

# checkinstall
script for SUNWstuf to politely suspend

grep quitinstall $1
if [ $? -eq 0 ]; then
    exit 3 # politely suspend installation
fi

exit 0

```

This approach would not work very well if the base directory was simply `/opt`. This package has to call out the `BASEDIR` more precisely since `/opt` would be difficult to walk. In fact, depending on the mount scheme, it may not be possible. The example walks the base directory by creating a new directory under `/opt`, which does not introduce any problems.

This example uses a `request` script and a `checkinstall` script even though versions of Solaris prior to the 2.5 release cannot run a `checkinstall` script. The `checkinstall` script in this example is used for the purpose of politely halting the installation in response to a private message in the form of the string “quitinstall.” If this script executes under the Solaris 2.3 release, the `checkinstall` script is ignored and the `request` script halts the installation with an error message.

Remember that prior to the Solaris 2.5 release, the `BASEDIR` parameter is a read-only parameter and cannot be changed by the `request` script. For this reason, if an old version of the SunOS operating system is detected (by testing for a conditioned `CLIENT_BASEDIR` environment variable), the `request` script has only two options—continue or quit.

Using Relative Parametric Paths

If your software product might be installed on older versions of the SunOS operating system, the `request` script needs to do all the necessary work. This approach can also be used to manipulate multiple directories. If additional directories are required, they still need to be included under a single base directory in order to provide an easily administrable product. While the `BASEDIR` parameter does not provide the level of granularity available in the latest Solaris release, your package can still walk the base directory by using the `request` script to manipulate parametric paths. This is how the `pkginfo` and `pkgmap` files might look.

The pkginfo File

```
# pkginfo file
PKG=SUNWstuf
NAME=software stuff
ARCH=sparc
VERSION=1.0.0,REV=1.0.4
CATEGORY=application
DESC=a set of utilities that do stuff
BASEDIR=/opt
SUBBASE=SUNWstuf
VENDOR=Sun Microsystems, Inc.
HOTLINE=Please contact your local service provider
EMAIL=
MAXINST=1000
CLASSES=none daemon
PSTAMP=hubert930603141632
```

The pkgmap File

```
: 1 1758
1 d none $SUBBASE/EZstuf 0775 root bin
1 f none $SUBBASE/EZstuf/dirdel 0555 bin bin 40 773 751310229
1 f none $SUBBASE/EZstuf/usrdel 0555 bin bin 40 773 751310229
1 f none $SUBBASE/EZstuf/filedel 0555 bin bin 40 773 751310229
1 d none $SUBBASE/HRDstuf 0775 root bin
1 f none $SUBBASE/HRDstuf/mksmart 0555 bin bin 40 773 751310229
1 f none $SUBBASE/HRDstuf/mktall 0555 bin bin 40 773 751310229
1 f none $SUBBASE/HRDstuf/mkcute 0555 bin bin 40 773 751310229
1 f none $SUBBASE/HRDstuf/mkeasy 0555 bin bin 40 773 751310229
1 d none /etc ? ? ?
1 d none /etc/rc2.d ? ? ?
1 f daemon /etc/rc2.d/S70dostuf 0744 root sys 450 223443
1 i pkginfo 348 28411 760740163
1 i postinstall 323 26475 751309908
```

(continued)


```

1 i postremove 402 33179 751309945
1 i preinstall 321 26254 751310019
1 i preremove 320 26114 751309865
1 i i.daemon 509 39560 752978103
1 i r.daemon 320 24573 742152591

```

This example is not perfect. A `pkginfo -r` command returns `/opt` for the installation base, which is pretty ambiguous. Many packages are in `/opt`, but at least it is a meaningful directory. Just like the previous example, this next example fully supports multiple architectures and versions. The `request` script can be tailored to the needs of the specific package and resolve whatever dependencies are applicable.

Example—A request Script That Walks a Relative Parametric Path

```

# request script
for SUNWstuf to walk a parametric path

PATH=/usr/sadm/bin:${PATH} # use admin utilities

MSG="The target directory $LOCAL_BASE already contains \
different architecture or version of $PKG. This package \
could be installed at the unused target directory $WRKNG_BASE."

PROMPT="Do you want to use to the proposed directory? "

HELP="A response of \"y\" will install to the proposed directory \
and continue, \"n\" will request a different directory. If \
the option \"-a none\" was used, press the <RETURN> key and \
enter an unused base directory when it is requested."

DIRPROMPT="Select a relative target directory under $BASEDIR/"

DIRHELP="The package $PKG will be installed at the location entered."

SUSPEND="Suspending installation at user request using error \
code 1."

NUBD_MSG="The location of this package is not the default. Be \
sure to update any applicable search paths with the actual \
location of the binaries which are at $WRKNG_BASE/EZstuf \
and $WRKNG_BASE/HRDstuf."

```

(continued)

```

Changed=""
Suffix="0"

#
# Determine if this product is actually installed in the working
# base directory.
#
Product_is_present () {
    if [ -d $WRKNG_BASE/EZstuf -o -d $WRKNG_BASE/HRDstuf ]; then
        return 1
    else
        return 0
    fi
}

if [ ${BASEDIR} ]; then
    # This may be an old version of Solaris. In the latest Solaris
    # CLIENT_BASEDIR won't be defined yet. In older versions it is.
    if [ ${CLIENT_BASEDIR} ]; then
        LOCAL_BASE=${BASEDIR}/${SUBBASE}
    else # The base directory hasn't been processed yet
        LOCAL_BASE=${PKG_INSTALL_ROOT}${BASEDIR}/${SUBBASE}
    fi

    WRKNG_BASE=${LOCAL_BASE}

    # See if the base directory is already in place and walk it if
    # possible
    while [ -d ${WRKNG_BASE} -a Product_is_present ]; do
        # There is a conflict
        # Is this an update of the same arch & version?
        if [ ${UPDATE} ]; then
            exit 0 # It's out of our hands.
        else
            # So this is a different architecture or
            # version than what is already there.
            # Walk the base directory
            Suffix=`expr $Suffix + 1`
            WRKNG_BASE=${LOCAL_BASE}.${Suffix}
            Changed="true"
        fi
    done

    # So now we can propose a base directory that isn't claimed by
    # any of our other versions.
    if [ $Changed ]; then
        puttext "$MSG"
        result=`ckyornd -Q -d "a" -h "$HELP" -p "$PROMPT"`
        if [ $? -eq 3 ]; then
            puttext "$SUSPEND"
            exit 1
        fi
    fi

```

(continued)

```

if [ $result="n" ]; then
    WRKNG_BASE=`ckpath -lyw -d "$WRKNG_BASE" -h "$DIRHELP" \
    -p "$DIRPROMPT"`

    elif [ $result="a" ]; then
        exit 0
    else
        exit 1
    fi
    echo SUBBASE=$SUBBASE.$Suffix >> $1
    puttext "$NUBD_MSG"
fi
fi
exit 0

```

Supporting Relocation in a Heterogeneous Environment

The original concept behind System V packaging assumed one architecture per system. The concept of a server did not play a role in the design. Now, of course, a single server may provide support for several architectures, which means there may be several copies of the same software on a server, each for a different architecture. While Solaris packages are sequestered within recommended file system boundaries (for example, / and /usr), with product databases on the server as well as each client, not all installations necessarily support this division. Certain implementations support an entirely different structure and imply a common product database. While pointing the clients to different versions is straightforward, actually installing System V packages to different base directories can introduce complications for the administrator.

When you design your package, you should also consider the common methods administrators use for introducing new software versions. Administrators often seek to install and test the latest version side-by-side with the currently installed version. The procedure involves installing the new version to a different base directory than the current version and directing a handful of non-critical clients to the new version as a test. As confidence builds, the administrator redirects more and more clients to

the new version. Eventually, the administrator retains the old version only for emergencies and then finally deletes it.

What this means is that packages destined for modern heterogeneous systems must support true relocation in the sense that the administrator may put them any reasonable place on the file system and still see full functionality. The Solaris 2.5 and later releases provide a number of useful tools which allow multiple architectures and versions to install cleanly to the same system. Older versions of the SunOS operating system also support true relocation but accomplishing the task is not quite as obvious.

Traditional Approach

Relocatable Packages

The System V ABI implies that the original intention behind the relocatable package was to make installing the package more convenient for the administrator. Now the need for relocatable packages goes much further. Convenience is not the only issue, rather it is quite possible that during the installation an active software product is already installed in the default directory. A package that is not designed to deal with this situation either overwrites the existing product or fails to install. However, a package designed handle multiple architectures and multiple versions can install smoothly and offer the administrator a wide range of options that are fully compatible with existing administrative traditions.

In some ways the problem of multiple architectures and the problem of multiple versions is the same. It must be possible to install a variant of the existing package side by side with other variants, and direct clients or standalone consumers of exported file systems to any one of those variants, without degraded functionality. While Sun has established methods for dealing with multiple architectures on a server, the administrator may not adhere to those recommendations. All packages need to be capable of complying with the administrators' reasonable wishes regarding installation.

Example-A Traditional Relocatable Package

This example shows what a traditional relocatable package may look like. The package is to be located in `/opt/SUNWstuf`, and its `pkginfo` file and `pkgmap` file might look like this.

The pkginfo File

```
# pkginfo file
PKG=SUNWstuf
NAME=software stuff
ARCH=sparc
VERSION=1.0.0,REV=1.0.4
CATEGORY=application
DESC=a set of utilities that do stuff
BASEDIR=/opt
VENDOR=Sun Microsystems, Inc.
HOTLINE=Please contact your local service provider
EMAIL=
MAXINST=1000
CLASSES=none
PSTAMP=hubert930603141632
```

The pkgmap File

```
: 1 1758
1 d none SUNWstuf 0775 root bin
1 d none SUNWstuf/EZstuf 0775 root bin
1 f none SUNWstuf/EZstuf/dirdel 0555 bin bin 40 773 751310229
1 f none SUNWstuf/EZstuf/usrdel 0555 bin bin 40 773 751310229
1 f none SUNWstuf/EZstuf/filedel 0555 bin bin 40 773 751310229
1 d none SUNWstuf/HRDstuf 0775 root bin
1 f none SUNWstuf/HRDstuf/mksmart 0555 bin bin 40 773 751310229
1 f none SUNWstuf/HRDstuf/mktall 0555 bin bin 40 773 751310229
1 f none SUNWstuf/HRDstuf/mkcute 0555 bin bin 40 773 751310229
1 f none SUNWstuf/HRDstuf/mkeasy 0555 bin bin 40 773 751310229
1 i pkginfo 348 28411 760740163
1 i postinstall 323 26475 751309908
1 i postremove 402 33179 751309945
1 i preinstall 321 26254 751310019
1 i preremove 320 26114 751309865
```

This is referred to as the traditional method because every package object is installed to the base directory defined by the `BASEDIR` parameter from the `pkginfo` file. For example, the first object in the `pkgmap` file is installed as the directory `/opt/SUNWstuf`.

Absolute Packages

An absolute package is one that installs to a particular root (/) file system. These packages are difficult to deal with from the standpoint of multiple versions and

architectures. As a general rule, all packages should be relocatable. There are, however very good reasons to include absolute elements in a relocatable package.

Example-A Traditional Absolute Package

If the `SUNWstuf` package was an absolute package, the `BASEDIR` parameter should not be defined in the `pkginfo` file, and the `pkgmap` file would look like this.

The pkgmap File

```
: 1 1758
1 d none /opt ? ? ?
1 d none /opt/SUNWstuf 0775 root bin
1 d none /opt/SUNWstuf/EZstuf 0775 root bin
1 f none /opt/SUNWstuf/EZstuf/dirdel 0555 bin bin 40 773 751310229
1 f none /opt/SUNWstuf/EZstuf/usrdel 0555 bin bin 40 773 751310229
1 f none /opt/SUNWstuf/EZstuf/filedel 0555 bin bin 40 773 751310229
1 d none /opt/SUNWstuf/HRDstuf 0775 root bin
1 f none /opt/SUNWstuf/HRDstuf/mksmart 0555 bin bin 40 773 751310229
1 f none /opt/SUNWstuf/HRDstuf/mktall 0555 bin bin 40 773 751310229
1 f none /opt/SUNWstuf/HRDstuf/mkcute 0555 bin bin 40 773 751310229
1 f none /opt/SUNWstuf/HRDstuf/mkeasy 0555 bin bin 40 773 751310229
1 i pkginfo 348 28411 760740163
1 i postinstall 323 26475 751309908
1 i postremove 402 33179 751309945
1 i preinstall 321 26254 751310019
1 i preremove 320 26114 751309865
```

In this example, if the administrator specified an alternate base directory during installation, it would be ignored by the `pkgadd` command. This package always installs to `/opt/SUNWstuf` of the target system.

The `-R` argument to the `pkgadd` command works as expected. For example,

```
pkgadd -d . -R /export/opt/client3 SUNWstuf
```

installs the objects in `/export/opt/client3/opt/SUNWstuf`; but that is the closest this package comes to being relocatable.

Notice the use of the question mark (?) for the `/opt` directory in the `pkgmap` file. This indicates that the existing attributes should not be changed. It does not mean “create the directory with default attributes,” although under certain circumstances that may happen. Any directory that is specific to the new package must specify all attributes explicitly.

Composite Packages

Any package containing relocatable objects is referred to as a relocatable package. This can be misleading because a relocatable package may contain absolute paths in its `pkgmap` file. Using a root (`/`) entry in a `pkgmap` file can enhance the relocatable aspects of the package. Packages that have both relocatable and root entries are called *composite* packages.

Example-A Traditional Solution

Assume that one object in the `SUNWstuf` package is a startup script executed at run level 2. The file `/etc/rc2.d/S70dstuf` needs to be installed as a part of the package, but it cannot be placed into the base directory. Assuming that a relocatable package is the only solution, the `pkginfo` and a `pkgmap` might look like this.

The pkginfo File

```
# pkginfo file
PKG=SUNWstuf
NAME=software stuff
ARCH=sparc
VERSION=1.0.0,REV=1.0.4
CATEGORY=application
DESC=a set of utilities that do stuff
BASEDIR=/
VENDOR=Sun Microsystems, Inc.
HOTLINE=Please contact your local service provider
EMAIL=
MAXINST=1000
CLASSES=none
PSTAMP=hubert930603141632
```

The pkgmap File

```
: 1 1758
1 d none opt/SUNWstuf/EZstuf 0775 root bin
1 f none opt/SUNWstuf/EZstuf/dirdel 0555 bin bin 40 773 751310229
1 f none opt/SUNWstuf/EZstuf/usrdel 0555 bin bin 40 773 751310229
1 f none opt/SUNWstuf/EZstuf/filedel 0555 bin bin 40 773 751310229
1 d none opt/SUNWstuf/HRDstuf 0775 root bin
1 f none opt/SUNWstuf/HRDstuf/mksmart 0555 bin bin 40 773 751310229
1 f none opt/SUNWstuf/HRDstuf/mktall 0555 bin bin 40 773 751310229
1 f none opt/SUNWstuf/HRDstuf/mkcute 0555 bin bin 40 773 751310229
1 f none opt/SUNWstuf/HRDstuf/mkeasy 0555 bin bin 40 773 751310229
```

(continued)

```

1 d none etc ? ? ?
1 d none etc/rc2.d ? ? ?
1 f none etc/rc2.d/S70dostuf 0744 root sys 450 223443
1 i pkginfo 348 28411 760740163
1 i postinstall 323 26475 751309908
1 i postremove 402 33179 751309945
1 i preinstall 321 26254 751310019
1 i preremove 320 26114 751309865

```

There is not much difference between this approach and that of the absolute package. In fact, this would be better off as an absolute package—if the administrator provided an alternate base directory for this package, it would not work!

In fact, only one file in this package needs to be root-relative, the rest could be moved anywhere. How to solve this problem through the use of a composite package is discussed throughout the remainder of this section.

Beyond Tradition

The approach described in this section does not apply to all packages, but it does result in improved performance during installation to an heterogeneous environment. Very little of this applies to packages that are delivered as part of the Solaris operating environment (bundled packages); however, unbundled packages can practice non-traditional packaging.

The reason behind encouraging relocatable packages is to support this requirement:

When a package is added or removed, the existing desirable behaviors of installed software products will be unchanged.

Unbundled packages should reside under `/opt` so as to assure that the new package does not interfere with existing products.

Another Look at Composite Packages

There are two rules to follow when constructing a functional composite package:

- Establish the base directory based upon where the vast majority of the package objects go.
- If a package object goes into a common directory that is not the base directory (for example, `/etc`), specify it as an absolute path name in the `prototype` file.

In other words, since “relocatable” means the object can be installed anywhere and still work, no startup script run by `init` at boot time can be considered relocatable! While there is nothing wrong with specifying `/etc/passwd` as a relative path in the delivered package, there is only one place it can go.

Making Absolute Path Names Look Relocatable

If you are going to construct a composite package, the absolute paths must operate in a manner which does not interfere with existing installed software. A package that can be entirely contained in `/opt` gets around this problem since there are no existing files in the way. When a file in `/etc` is included in the package, you must ensure that the absolute path names behave in the same way that is expected from relative path names. Consider the following two examples.

Example—Modifying a File

Description

An entry is being added to a table, or the object is a new table which is likely to be modified by other programs or packages.

Implementation

Define the object as file type `e` and belonging to the `build`, `awk`, or `sed` class. The script that performs this task must remove itself as effectively as it adds itself.

Example

An entry needs to be added to `/etc/vfstab` in support of the new solid state hard disk.

The entry in the `pkgmap` file might be

```
1 e sed /etc/vfstab ? ? ?
```

The `request` script asks the operator if `/etc/vfstab` should be modified by the package. If the operator answers “no” then the request script will print instructions on how to do the job manually and will execute

```
echo "CLASSES=none" >> $1
```

If the operator answers “yes” then it executes

```
echo "CLASSES=none sed" >> $1
```

which activates the class action script that will make the necessary modifications. The `sed` class means that the package file `/etc/vfstab` is a `sed` program which contains both the install and remove operations for the same-named file on the target system.

Example—Creating a New File

Description

The object is an entirely new file that is unlikely to be edited at a later time or, it is replacing a file owned by another package.

Implementation

Define the package object as file type `f` and install it using a class action script capable of undoing the change.

Example

A brand new file is required in `/etc` to provide the necessary information to support the solid state hard disk, named `/etc/shdisk.conf`. The entry in the `pkgmap` file might look like this:

```
.  
.   
.   
1 f newetc /etc/shdisk.conf  
.   
.   
.
```

The class action script `i.newetc` is responsible for installing this and any other files that need to go into `/etc`. It checks to make sure there is not another file there. If there is not, it will simply copy the new file into place. If there is already a file in place, it will back it up before installing the new file. The script `r.newetc` removes these files and restores the originals, if required. Here is the key fragment of the install script.

```

# i.newetc
while read src dst; do
    if [ -f $dst ]; then
        dstfile=`basename $dst`
        cp $dst $PKGSAV/$dstfile
    fi
    cp $src $dst
done

if [ "${1}" = "ENDOFCLASS" ]; then
    cd $PKGSAV
    tar cf SAVE.newetc .
    $INST_DATADIR/$PKG/install/squish SAVE.newetc
fi

```

Notice that this script uses the `PKGSAV` environment variable to store a backup of the file to be replaced. When the argument `ENDOFCLASS` is passed to the script, that is the `pkgadd` command informing the script that these are the last entries in this class, at which point the script archives and compresses the files that were saved using a private compression program stored in the `install` directory of the package.

While the use of the `PKGSAV` environment variable is not reliable during a package update; if the package is not updated (through a patch, for instance) the backup file is secure. The following remove script includes code to deal with the other issue—the fact that older versions of the `pkgrm` command do not pass the scripts the correct path to the `PKGSAV` environment variable.

The removal script might look like this.

```

# r.newetc

# make sure we have the correct PKGSAV
if [ -d $PKG_INSTALL_ROOT$PKGSAV ]; then
    PKGSAV="$PKG_INSTALL_ROOT$PKGSAV"
fi

# find the unsquish program
UNSQUISH_CMD=`dirname $0`/unsquish

while read file; do
    rm $file
done

if [ "${1}" = ENDOFCLASS ]; then
    if [ -f $PKGSAV/SAVE.newetc.sq ]; then
        $UNSQUISH_CMD $PKGSAV/SAVE.newetc
    fi
fi

```

(continued)

```

if [ -f $PKGSAV/SAVE.newetc ]; then
    targetdir=dirname $file # get the right directory
    cd $targetdir
    tar xf $PKGSAV/SAVE.newetc
    rm $PKGSAV/SAVE.newetc
fi
fi

```

This script uses a private uninstalled algorithm (`unsquish`) which is in the install directory of the package database. This is done automatically by the `pkgadd` command at install time. All scripts not specifically recognized as install-only by the `pkgadd` command are left in this directory for use by the `pkgm` command. You cannot count on where that directory is, but you can depend on the directory being flat and containing all appropriate information files and installation scripts for the package. This script finds the directory by virtue of the fact that the class action script is guaranteed to be executing from the directory that contains the `unsquish` program.

Notice, also, that this script does not just assume the target directory is `/etc`. It may actually be `/export/root/client2/etc`. The correct directory could be constructed in one of two ways.

- Use the `${PKG_INSTALL_ROOT}/etc` construction, or
- Take the directory name of a file passed by the `pkgadd` command (which is what this script does).

By using this approach for each absolute object in the package, you can be sure that the current desirable behavior is unchanged or at least recoverable.

Example—A Composite Package

This is an example of the `pkginfo` and `pkgmap` files for a composite package.

The pkginfo File

```

PKG=SUNWstuf
NAME=software stuff
ARCH=sparc
VERSION=1.0.0,REV=1.0.4
CATEGORY=application
DESC=a set of utilities that do stuff

```

```

BASEDIR=/opt
VENDOR=Sun Microsystems, Inc.
HOTLINE=Please contact your local service provider
EMAIL=
MAXINST=1000
CLASSES=none daemon
PSTAMP=hubert930603141632

```

The pkgmap File

```

: 1 1758
1 d none SUNWstuf/EZstuf 0775 root bin
1 f none SUNWstuf/EZstuf/dirdel 0555 bin bin 40 773 751310229
1 f none SUNWstuf/EZstuf/usrdel 0555 bin bin 40 773 751310229
1 f none SUNWstuf/EZstuf/filedel 0555 bin bin 40 773 751310229
1 d none SUNWstuf/HRDstuf 0775 root bin
1 f none SUNWstuf/HRDstuf/mksmart 0555 bin bin 40 773 751310229
1 f none SUNWstuf/HRDstuf/mktall 0555 bin bin 40 773 751310229
1 f none SUNWstuf/HRDstuf/mkcute 0555 bin bin 40 773 751310229
1 f none SUNWstuf/HRDstuf/mkeasy 0555 bin bin 40 773 751310229
1 d none /etc ? ? ?
1 d none /etc/rc2.d ? ? ?
1 e daemon /etc/rc2.d/S70dostuf 0744 root sys 450 223443
1 i i.daemon 509 39560 752978103
1 i pkginfo 348 28411 760740163
1 i postinstall 323 26475 751309908
1 i postremove 402 33179 751309945
1 i preinstall 321 26254 751310019
1 i preremove 320 26114 751309865
1 i r.daemon 320 24573 742152591

```

While `S70dostuf` belongs to the `daemon` class, the directories that lead up to it (which are already in place at install time) belong to the `none` class. Even if the directories were unique to this package, you should leave them in the `none` class. The reason for this is that the directories need to be created first and deleted last, and this is always true for the `none` class. The `pkgadd` command creates directories; they are not copied from the package and they are not passed to a class action script to be created. Instead, they are created by the `pkgadd` command before it calls the install class action script, and the `pkgrm` command deletes directories after completion of the removal class action script.

This means that if a directory in a special class contains objects in the class `none`, when the `pkgrm` command attempts to remove the directory, it fails because the directory will not be empty in time. If an object of class `none` is to be inserted into a directory of some special class, that directory will not exist in time to accept the object. The `pkgadd` command will create the directory on-the-fly during installation of the object and may not be able to synchronize the attributes of that directory when it finally sees the `pkgmap` definition.

Note - When assigning a directory to a class, always remember the order of creation and deletion.

Making Packages Installable Remotely

All packages *must* be installable remotely. Installable remotely means you do not assume the administrator installing your package is installing to the root (/) file system of the system running the `pkgadd` command. If, in one of your procedure scripts, you need to get to the `/etc/vfstab` file of the target system, you need to use the `PKG_INSTALL_ROOT` environment variable. In other words, the path name `/etc/vfstab` will get you to the `/etc/vfstab` file of the system running the `pkgadd` command, but the administrator may be installing to a client at `/export/root/client3`. The path `${PKG_INSTALL_ROOT}/etc/vfstab` is guaranteed to get you to the target file system.

Example—Installing to a Client

In this example, the `SUNWstuf` package is installed to `client3`, which is configured with `/opt` in its root (/) file system. One other version of this package is already installed on `client3`, and the base directory is set to `basedir=/opt/$PKGINST` from an administration file, `thisadmin`. (For more information on administration files, see “The Administrative Defaults File” on page 122.) The `pkgadd` command executed on the server is:

```
pkgadd -a thisadmin -R /export/root/client3 SUNWstuf
```

Table 6-2 lists the environment variables and their values that are passed to the procedure scripts.

TABLE 6-2 Values Passed to Procedure Scripts

Environment Variable	Value
PKGINST	SUNWstuf.2
PKG_INSTALL_ROOT	/export/root/client3
CLIENT_BASEDIR	/opt/SUNWstuf.2
BASEDIR	/export/root/client3/opt/SUNWstuf.2

Example—Installing to a Server or Standalone

To install to the server or a standalone system under the same circumstances as the previous example, the command is:

```
pkgadd -a thisadmin SUNWstuf
```

Table 6-3 lists the environment variables and their values that are passed to the procedure scripts.

TABLE 6-3 Values Passed to Procedure Scripts

Environment Variable	Value
PKGINST	SUNWstuf.2
PKG_INSTALL_ROOT	Not defined.
CLIENT_BASEDIR	/opt/SUNWstuf.2
BASEDIR	/opt/SUNWstuf.2

Example—Mounting Shared File Systems

Assume that the `SUNWstuf` package creates and shares a file system on the server at `/export/SUNWstuf/share`. When the package is installed to the clients, their `/etc/vfstab` files need to be updated to mount this shared file system. This is a situation where you can use the `CLIENT_BASEDIR` variable.

The entry on the client needs to present the mount point with reference to the client's file system. This line should be constructed correctly whether the installation is from the server or from the client. Assume that the server's system name is `$SERVER`. You can go to `$PKG_INSTALL_ROOT/etc/vfstab` and, using the `sed` or `awk` commands, construct the following line for the client's `/etc/vfstab` file.

```
$SERVER:/export/SUNWstuf/share - $CLIENT_BASEDIR/usr nfs - yes ro
```

For example, for the server `universe` and the client system `client9`, the line in the client system's `/etc/vfstab` file would look like:

```
universe:/export/SUNWstuf/share - /opt/SUNWstuf.2/usr nfs - yes ro
```

Using these parameters correctly, the entry always mounts the client's file system, whether it is being constructed locally or from the server.

Patching Packages

A patch to a package is just a sparse package designed to overwrite certain files in the original. There is no real reason for shipping a sparse package except to save space on the delivery medium. You could also ship the entire original package with a few files changed, or provide access to the modified package over a network. As long as only those new files are actually different (the other files were not recompiled), the `pkgadd` command installs the differences. Review the following guidelines regarding patching packages.

- A patch must not change the intended delivered behavior of the package—it is *not* a mechanism for installing new features. A patch is used to repair objects installed on the system.
- If the system is complex enough, it is wise to establish a patch identification system which assures that no two patches replace the same file in an attempt to

correct different aberrant behaviors. For instance, Sun patch base numbers are assigned mutually exclusive sets of files for which they are responsible.

- It is necessary to be able to back out a patch.

It is crucial that the version number of the patch package be the same as that of the original package. This is true because a patch *must not* add functionality. You should keep track of the patch status of the package using a separate `pkginfo` file entry of the form

<code>PATCH=patch_number</code>

If the package version is changed for a patch, you create another instance of the package and it becomes extremely difficult to manage the patched product. This method of progressive instance patching carried certain advantages in the early releases of the Solaris operating environment, but makes management of more complicated systems tedious.

As far as the packages that make up the Solaris operating environment are concerned, there should be only one copy of the package in the package database, although there may be multiple patched instances. In order to remove an object from an installed package (using the `removef` command) you need to figure out what instances own that file.

However, if your package (that is not part of the Solaris operating environment) needs to determine the patch level of a particular package that *is* part of the Solaris operating environment, this becomes a problem to be resolved here. The installation scripts can be quite large without significant impact since they are not stored on the target file system. Using class action scripts and various other procedure scripts, you can save changed files using the `PKGSAV` environment variable (or to some other, more permanent directory) in order to allow backing out installed patches. You can also monitor patch history by setting appropriate environment variables through the `request` scripts. The scripts in the next sections assume that there may be multiple patches whose numbering scheme carries some meaning when applied to a single package. In this case, individual patch numbers represent a subset of functionally related files within the package. Two different patch numbers cannot change the same file.

In order to make a regular sparse package into a patch package, the scripts described in the following sections can simply be folded into the package. All of them are recognizable as standard package components with the exception of the last two which are named `patch_checkinstall` and `patch_postinstall`. Those two scripts can be incorporated into the backout package, if you want to include the ability to back out the patch. The scripts are fairly simple and their various tasks are straightforward.

Note - This method of patching can be used to patch client systems, but client root directories on the server must have the correct permissions to allow reading by the user `install` or `nobody`.

The checkinstall Script

The `checkinstall` script verifies that the patch is appropriate for this particular package. Once that is confirmed, it constructs the *patch list* and the *patch info* list, and then inserts them into the response file for incorporation into the package database.

A patch list is the list of patches that have affected the current package. This list of patches is recorded in the installed package in the `pkginfo` file with a line that might look like this:

```
PATCHLIST=patch_id patch_id ...
```

A patch info list is the list of patches on which the current patch is dependent. This list of patches is also recorded in the `pkginfo` file with a line that might look like this.

```
PATCH_INFO_103203-01=Installed... Obsoletes:103201-01 Requires: \  
Incompatibles: 120134-01
```

Note - These lines (and their format) are declared as a public interface. Any company that ships patches for Solaris packages should update this list appropriately. When a patch is delivered, each package within the patch contains a `checkinstall` script that performs this task. That same `checkinstall` script also updates some other patch-specific parameters. This is the new patch architecture, which is called Direct Instance Patching.

In this example, both the original packages and their patches exist in the same directory. The two original packages are named `SUNWstuf.v1` and `SUNWstuf.v2`, and their patches are named `SUNWstuf.p1` and `SUNWstuf.p2`. What this means is that it could be very difficult for a procedure script to figure out what directory these files came from, since everything in the package name after the dot (“.”) is stripped for the `PKG` parameter, and the `PKGINST` environment variable refers to the installed instance not the source instance. So the procedure scripts can find the source directory, the `checkinstall` script (which is always executed from the source directory) makes the inquiry and passes the location on as the variable `SCRIPTS_DIR`. If there had been only one package in the source directory called `SUNWstuf`, then the procedure scripts could have found it using `$INSTDIR/$PKG`.

```
# checkinstall script to control a patch installation.  
# directory format options.  
#  
#      @(#)checkinstall 1.6 96/09/27 SMI  
#  
# Copyright (c) 1995 by Sun Microsystems, Inc.
```

```

# All rights reserved
#

PATH=/usr/sadm/bin:$PATH

INFO_DIR=`dirname $0`
INFO_DIR=`dirname $INFO_DIR`      # one level up

NOVERS_MSG="PaTch_MsG 8 Version $VERSION of $PKG is not installed on this system."
ALRDY_MSG="PaTch_MsG 2 Patch number $Patch_label is already applied."
TEMP_MSG="PaTch_MsG 23 Patch number $Patch_label cannot be applied until all \
restricted patches are backed out."

# Read the provided environment from what may have been a request script
. $1

# Old systems can't deal with checkinstall scripts anyway
if [ "$PATCH_PROGRESSIVE" = "true" ]; then
    exit 0
fi

#
# Confirm that the intended version is installed on the system.
#
if [ "${UPDATE}" != "yes" ]; then
    echo "$NOVERS_MSG"
    exit 3
fi

#
# Confirm that this patch hasn't already been applied and
# that no other mix-ups have occurred involving patch versions and
# the like.
#
Skip=0
active_base=`echo $Patch_label | nawk '
    { print substr($0, 1, match($0, "Patchvers_pfx")-1) } '`
active_inst=`echo $Patch_label | nawk '
    { print substr($0, match($0, "Patchvers_pfx")+Patchvers_pfx_lnth) } '`

# Is this a restricted patch?
if echo $active_base | egrep -s "Patchstrict_str"; then
    is_restricted="true"
    # All restricted patches are backoutable
    echo "PATCH_NO_UNDO=" >> $1
else
    is_restricted="false"
fi

for patchappl in ${PATCHLIST}; do
    # Is this an ordinary patch applying over a restricted patch?
    if [ $is_restricted = "false" ]; then
        if echo $patchappl | egrep -s "Patchstrict_str"; then
            echo "$TEMP_MSG"

```

(continued)

```

        exit 3;
    fi

    fi

    # Is there a newer version of this patch?
    appl_base=`echo $patchappl | nawk '
    { print substr($0, 1, match($0, "Patchvers_pfx")-1) } '`
    if [ $appl_base = $active_base ]; then
        appl_inst=`echo $patchappl | nawk '
        { print substr($0, match($0, "Patchvers_pfx")\
+Patchvers_pfx_lnth) } '`
        result=`expr $appl_inst \> $active_inst`
        if [ $result -eq 1 ]; then
            echo "PaTch_MsG 1 Patch number $Patch_label is \
superceded by the already applied $patchappl."
            exit 3
        elif [ $appl_inst = $active_inst ]; then
            # Not newer, it's the same
            if [ "$PATCH_UNCONDITIONAL" = "true" ]; then
                if [ -d $PKGSAV/$Patch_label ]; then
                    echo "PATCH_NO_UNDO=true" >> $1
                fi
            else
                echo "$ALRDY_MSG"
                exit 3;
            fi
        fi
    fi

done

# Construct a list of applied patches in order
echo "PATCHLIST=${PATCHLIST} $Patch_label" >> $1

#
# Construct the complete list of patches this one obsoletes
#
ACTIVE_OBSOLETEES=$Obsoletes_label

if [ -n "$Obsoletes_label" ]; then
    # Merge the two lists
    echo $Obsoletes_label | sed 'y/\ /\\n/' | \
    nawk -v PatchObsList="$PATCH_OBSOLETEES" '
    BEGIN {
        printf("PATCH_OBSOLETEES=");
        PatchCount=split(PatchObsList, PatchObsComp, " ");

        for(PatchIndex in PatchObsComp) {
            Atisat=match(PatchObsComp[PatchIndex], "@");
            PatchObs[PatchIndex]=substr(PatchObsComp[PatchIndex], \
0, Atisat-1);
            PatchObsCnt[PatchIndex]=substr(PatchObsComp\
[PatchIndex], Atisat+1);
        }
    }

```

(continued)

```

{
    Inserted=0;
    for(PatchIndex in PatchObs) {
        if (PatchObs[PatchIndex] == $0) {
            if (Inserted == 0) {
                PatchObsCnt[PatchIndex]=PatchObsCnt\
[PatchIndex]+1;
                Inserted=1;
            } else {
                PatchObsCnt[PatchIndex]=0;
            }
        }
    }
    if (Inserted == 0) {
        printf ("%s@1 ", $0);
    }
    next;
}
END {
    for(PatchIndex in PatchObs) {
        if ( PatchObsCnt[PatchIndex] != 0) {
            printf("%s@d ", PatchObs[PatchIndex], \
PatchObsCnt[PatchIndex]);
        }
        printf("\n");
    } ' >> $1
    # Clear the parameter since it has already been used.
    echo "Obsoletes_label=" >> $1

    # Pass it's value on to the preinstall under another name
    echo "ACTIVE_OBSELETE=$ACTIVE_OBSELETE" >> $1
fi

#
# Construct PATCH_INFO line for this package.
#

tmpRequire='nawk -F= ' $1 ~ /REQUIR/ { print $2 } ' $INFO_DIR/pkginfo '
tmpIncompat='nawk -F= ' $1 ~ /INCOMPAT/ { print $2 } ' $INFO_DIR/pkginfo '

if [ -n "$tmpRequire" ] && [ -n "$tmpIncompat" ]
then
    echo "PATCH_INFO_$Patch_label=Installed: 'date' From: 'uname -n' \
Obsoletes: $ACTIVE_OBSELETE Requires: $tmpRequire \
Incompatibles: $tmpIncompat" >> $1
elif [ -n "$tmpRequire" ]
then
    echo "PATCH_INFO_$Patch_label=Installed: 'date' From: 'uname -n' \
Obsoletes: $ACTIVE_OBSELETE Requires: $tmpRequire \
Incompatibles: " >> $1
elif [ -n "$tmpIncompat" ]
then
    echo "PATCH_INFO_$Patch_label=Installed: 'date' From: 'uname -n' \

```

(continued)

```

        Obsoletes: $ACTIVE_OBSOLETES Requires: Incompatibles: \
$tmpIncompat" >> $1
else
    echo "PATCH_INFO_$Patch_label=Installed: `date` From: `uname -n` \
        Obsoletes: $ACTIVE_OBSOLETES Requires: Incompatibles: " >> $1
fi

#
# Since this script is called from the delivery medium and we may be using
# dot extensions to distinguish the different patch packages, this is the
# only place we can, with certainty, trace that source for our backout
# scripts. (Usually $INST_DATADIR would get us there).
#
echo "SCRIPTS_DIR=`dirname $0`" >> $1

# If additional operations are required for this package, place
# those package-specific commands here.

#XXXSpecial_CommandsXXX#

exit 0

```

The preinstall Script

The preinstall script initializes the prototype file, information files, and installation scripts for the backout package to be constructed. This script is very simple and the remaining scripts in this example only allow a backout package to describe regular files.

If you wanted to restore symbolic links, hard links, devices, and named pipes in a backout package, you could modify the preinstall script to use the `pkgproto` command to compare the delivered `pkgmap` file with the installed files, and then create a prototype file entry for each non-file to be changed in the backout package. The method you should use is similar to the method in the class action script.

The scripts `patch_checkinstall` and `patch_postinstall` are inserted into the package source tree from the preinstall script. These two scripts undo what the patch does.

```

# This script initializes the backout data for a patch package
# directory format options.
#
#      @(#)preinstall 1.5 96/05/10 SMI
#
# Copyright (c) 1995 by Sun Microsystems, Inc.

```

(continued)

```

# All rights reserved
#

PATH=/usr/sadm/bin:$PATH
recovery="no"

if [ "$PKG_INSTALL_ROOT" = "/" ]; then
    PKG_INSTALL_ROOT=""
fi

# Check to see if this is a patch installation retry.
if [ "$INTERRUPTION" = "yes" ]; then
    if [ -d "$PKG_INSTALL_ROOT/var/tmp/$Patch_label.$PKGINST" ] || [ -d \
"$PATCH_BUILD_DIR/$Patch_label.$PKGINST" ]; then
        recovery="yes"
    fi
fi

if [ -n "$PATCH_BUILD_DIR" -a -d "$PATCH_BUILD_DIR" ]; then
    BUILD_DIR="$PATCH_BUILD_DIR/$Patch_label.$PKGINST"
else
    BUILD_DIR="$PKG_INSTALL_ROOT/var/tmp/$Patch_label.$PKGINST"
fi

FILE_DIR=$BUILD_DIR/files
RELOC_DIR=$BUILD_DIR/files/reloc
ROOT_DIR=$BUILD_DIR/files/root
PROTO_FILE=$BUILD_DIR/prototype
PKGINFO_FILE=$BUILD_DIR/pkginfo
THIS_DIR=`dirname $0`

if [ "$PATCH_PROGRESSIVE" = "true" ]; then
    # If this is being used in an old-style patch, insert
    # the old-style script commands here.

    #XXXOld_CommandsXXX#

    exit 0
fi

#
# Unless specifically denied, initialize the backout patch data by
# creating the build directory and copying over the original pkginfo
# which pkgadd saved in case it had to be restored.
#
if [ "$PATCH_NO_UNDO" != "true" ] && [ "$recovery" = "no" ]; then
    if [ -d $BUILD_DIR ]; then
        rm -r $BUILD_DIR
    fi

    # If this is a retry of the same patch then recovery is set to
    # yes. Which means there is a build directory already in
    # place with the correct backout data.

```

(continued)

```

if [ "$$recovery" = "no" ]; then
    mkdir $BUILD_DIR
    mkdir -p $RELOC_DIR
    mkdir $ROOT_DIR
fi

#
# Here we initialize the backout pkginfo file by first
# copying over the old pkginfo file and then adding the
# ACTIVE_PATCH parameter so the backout will know what patch
# it's backing out.
#
# NOTE : Within the installation, pkgparam returns the
# original data.
#
pkgparam -v $PKGINST | nawk '
    $1 ~ /PATCHLIST/      { next; }
    $1 ~ /PATCH_OBSOLETE/ { next; }
    $1 ~ /ACTIVE_OBSOLETE/ { next; }
    $1 ~ /Obsoletes_label/ { next; }
    $1 ~ /ACTIVE_PATCH/    { next; }
    $1 ~ /Patch_label/     { next; }
    $1 ~ /UPDATE/          { next; }
    $1 ~ /SCRIPTS_DIR/     { next; }
    $1 ~ /PATCH_NO_UNDO/  { next; }
    $1 ~ /INSTDATE/        { next; }
    $1 ~ /PKGINST/         { next; }
    $1 ~ /OAMBASE/         { next; }
    $1 ~ /PATH/            { next; }
    { print; } ' > $PKGINFO_FILE
echo "ACTIVE_PATCH=$Patch_label" >> $PKGINFO_FILE
echo "ACTIVE_OBSOLETE=$ACTIVE_OBSOLETE" >> $PKGINFO_FILE

# And now initialize the backout prototype file with the
# pkginfo file just formulated.
echo "i pkginfo" > $PROTO_FILE

# Copy over the backout scripts including the undo class
# action scripts
for script in $SCRIPTS_DIR/*; do
    srcscript='basename $script'
    targscript='echo $srcscript | nawk '
        { script=$0; }
        /u\./ {
            sub("u.", "i.", script);
            print script;
            next;
        }
        /patch_/ {
            sub("patch_", "", script);
            print script;
            next;
        }
        { print "dont_use" } ''

```

(continued)


```

        if [ "$stargscript" = "dont_use" ]; then
            continue
        fi

        echo "i $stargscript=$FILE_DIR/$stargscript" >> $PROTO_FILE
        cp $SCRIPTS_DIR/$srcscript $FILE_DIR/$stargscript
    done
    #
    # Now add entries to the prototype file that won't be passed to
    # class action scripts. If the entry is brand new, add it to the
    # deletes file for the backout package.
    #
    Our_Pkgmap=`dirname $SCRIPTS_DIR`/pkgmap
    BO_Deletes=$FILE_DIR/deletes

    nawk -v basedir=${BASEDIR:-/} '
        BEGIN { count=0; }
        {
            token = $2;
            ftype = $1;
        }
        $1 ~ /[#\!:\]/ { next; }
        $1 ~ /[0123456789]/ {
            if ( NF >= 3 ) {
                token = $3;
                ftype = $2;
            } else {
                next;
            }
        }
        { if (ftype == "i" || ftype == "e" || ftype == "f" || ftype == \
"v" || ftype == "d") { next; } }
        {
            equals=match($4, "=")-1;
            if ( equals == -1 ) { print $3, $4; }
            else { print $3, substr($4, 0, equals); }
        }
    ' < $Our_Pkgmap | while read class path; do
        #
        # NOTE: If pkgproto is passed a file that is
        # actually a hard link to another file, it
        # will return ftype "f" because the first link
        # in the list (consisting of only one file) is
        # viewed by pkgproto as the source and always
        # gets ftype "f".
        #
        # If this isn't replacing something, then it
        # just goes to the deletes list.
        #
        if valpath -l $path; then
            Chk_Path="$BASEDIR/$path"
            Build_Path="$RELOC_DIR/$path"
            Proto_From="$BASEDIR"
        else
            # It's an absolute path

```

(continued)

```

        Chk_Path="$PKG_INSTALL_ROOT$spath"
        Build_Path="$ROOT_DIR$spath"
        Proto_From="$PKG_INSTALL_ROOT"
    fi
    #
    # Hard links have to be restored as regular files.
    # Unlike the others in this group, an actual
    # object will be required for the pkgmk.
    #
    if [ -f "$Chk_Path" ]; then
        mkdir -p `dirname $Build_Path`
        cp $Chk_Path $Build_Path
        cd $Proto_From
        pkgproto -c $class "$Build_Path=$spath" 1>> \
$PROTO_FILE 2> /dev/null
        cd $THIS_DIR
    elif [ -h "$Chk_Path" -o \
        -c "$Chk_Path" -o \
        -b "$Chk_Path" -o \
        -p "$Chk_Path" ]; then
        pkgproto -c $class "$Chk_Path=$spath" 1>> \
$PROTO_FILE 2> /dev/null
    else
        echo $spath >> $BO_Deletes
    fi
done
fi

# If additional operations are required for this package, place
# those package-specific commands here.

#XXXSpecial_CommandsXXX#

exit 0

```

The Class Action Script

The class action script creates a copy of each file that replaces an existing file and adds a corresponding line to the `prototype` file for the backout package. This is all done with fairly simple `nawk` scripts. The class action script receives a list of source/destination pairs consisting of ordinary files that do not match the corresponding installed files. Symbolic links and other non-files must be dealt with in the `preinstall` script.

```

# This class action script copies the files being replaced
# into a package being constructed in $BUILD_DIR. This class
# action script is only appropriate for regular files that
# are installed by simply copying them into place.
#
# For special package objects such as edittable files, the patch
# producer must supply appropriate class action scripts.
#
# directory format options.
#
#      @(#)i.script 1.6 96/05/10 SMI
#
# Copyright (c) 1995 by Sun Microsystems, Inc.
# All rights reserved
#

PATH=/usr/sadm/bin:$PATH

ECHO="/usr/bin/echo"
SED="/usr/bin/sed"
PKGPROTO="/usr/bin/pkgproto"
EXPR="/usr/bin/expr"      # used by dirname
MKDIR="/usr/bin/mkdir"
CP="/usr/bin/cp"
RM="/usr/bin/rm"
MV="/usr/bin/mv"

recovery="no"
Pn=$$
procIdCtr=0

CMDS_USED="$ECHO $SED $PKGPROTO $EXPR $MKDIR $CP $RM $MV"
LIBS_USED=""

if [ "$PKG_INSTALL_ROOT" = "/" ]; then
    PKG_INSTALL_ROOT=""
fi

# Check to see if this is a patch installation retry.
if [ "$INTERRUPTION" = "yes" ]; then
    if [ -d "$PKG_INSTALL_ROOT/var/tmp/$Patch_label.$PKGINST" ] || \
[ -d "$PATCH_BUILD_DIR/$Patch_label.$PKGINST" ]; then
        recovery="yes"
    fi
fi

if [ -n "$PATCH_BUILD_DIR" -a -d "$PATCH_BUILD_DIR" ]; then
    BUILD_DIR="$PATCH_BUILD_DIR/$Patch_label.$PKGINST"
else
    BUILD_DIR="$PKG_INSTALL_ROOT/var/tmp/$Patch_label.$PKGINST"
fi

FILE_DIR=$BUILD_DIR/files
RELOC_DIR=$FILE_DIR/reloc
ROOT_DIR=$FILE_DIR/root
BO_Deletes=$FILE_DIR/deletes

```

(continued)

```

PROGNAME=`basename $0`

if [ "$PATCH_PROGRESSIVE" = "true" ]; then
    PATCH_NO_UNDO="true"
fi

# Since this is generic, figure out the class.
Class=`echo $PROGNAME | nawk ' { print substr($0, 3) } '`

# Since this is an update, $BASEDIR is guaranteed to be correct
BD=${BASEDIR:-/}

cd $BD

#
# First, figure out the dynamic libraries that can trip us up.
#
if [ -z "$PKG_INSTALL_ROOT" ]; then
    if [ -x /usr/bin/ldd ]; then
        LIB_LIST=`/usr/bin/ldd $CMDS_USED | sort -u | nawk '
            $1 ~ /\// { continue; }
            { printf "%s ", $3 } '`
    else
        LIB_LIST="/usr/lib/libc.so.1 /usr/lib/libdl.so.1
\
/usr/lib/libw.so.1 /usr/lib/libintl.so.1 /usr/lib/libadm.so.1 \
/usr/lib/libelf.so.1"
    fi
fi

#
# Now read the list of files in this class to be replaced. If the file
# is already in place, then this is a change and we need to copy it
# over to the build directory if undo is allowed. If it's a new entry
# (No $dst), then it goes in the deletes file for the backout package.
#
procIdCtr=0
while read src dst; do
    if [ -z "$PKG_INSTALL_ROOT" ]; then
        Chk_Path=$dst
        for library in $LIB_LIST; do
            if [ $Chk_Path = $library ]; then
                $CP $dst $dst.$Pn
                LIBS_USED="$LIBS_USED $dst.$Pn"
                LD_PRELOAD="$LIBS_USED"
                export LD_PRELOAD
            fi
        done
    fi

    if [ "$PATCH_PROGRESSIVE" = "true" ]; then
        # If this is being used in an old-style patch, insert
        # the old-style script commands here.
    fi
done

```

(continued)

```

        #XXXOld_CommandsXXX#
        echo >/dev/null # dummy
    fi

    if [ "${PATCH_NO_UNDO}" != "true" ]; then
        #
        # Here we construct the path to the appropriate source
        # tree for the build. First we try to strip BASEDIR. If
        # there's no BASEDIR in the path, we presume that it is
        # absolute and construct the target as an absolute path
        # by stripping PKG_INSTALL_ROOT. FS_Path is the path to
        # the file on the file system (for deletion purposes).
        # Build_Path is the path to the object in the build
        # environment.
        #
        if [ "$BD" = "/" ]; then
            FS_Path='$ECHO $dst | $SED s@"$BD"@@\'
        else
            FS_Path='$ECHO $dst | $SED s@"$BD/"@@\'
        fi

        # If it's an absolute path the attempt to strip the
        # BASEDIR will have failed.
        if [ $dst = $FS_Path ]; then
            if [ -z "$PKG_INSTALL_ROOT" ]; then
                FS_Path=$dst
                Build_Path="$ROOT_DIR$dst"
            else
                Build_Path="$ROOT_DIR`echo $dst | \
                    sed s@"$PKG_INSTALL_ROOT"@@`"
                FS_Path=`echo $dst | \
                    sed s@"$PKG_INSTALL_ROOT"@@`
            fi
        else
            Build_Path="$RELOC_DIR/$FS_Path"
        fi

        if [ -f $dst ]; then      # If this is replacing something
            cd $FILE_DIR
            #
            # Construct the prototype file entry. We replace
            # the pointer to the filesystem object with the
            # build directory object.
            #
            $PKGPROTO -c $Class $dst=$FS_Path | \
                $SED -e s@=$dst@=$Build_Path@ >> \
                $BUILD_DIR/prototype

            # Now copy over the file
            if [ "$recovery" = "no" ]; then
                DirName=`dirname $Build_Path`
                $MKDIR -p $DirName
                $CP -p $dst $Build_Path
            else

```

(continued)

```

        # If this file is already in the build area skip it
        if [ -f "$Build_Path" ]; then
            cd $BD
            continue
        else
            DirName=`dirname $Build_Path`
            if [ ! -d "$DirName" ]; then
                $MKDIR -p $DirName
            fi
            $CP -p $dst $Build_Path
        fi
    fi

    cd $BD
else    # It's brand new
    $ECHO $FS_Path >> $BO_Deletes
fi

# If special processing is required for each src/dst pair,
# add that here.
#
#XXXSpecial_CommandsXXX#
#

$CP $src $dst.$$$procIdCtr
if [ $? -ne 0 ]; then
    $RM $dst.$$$procIdCtr 1>/dev/null 2>&1
else
    $MV -f $dst.$$$procIdCtr $dst
    for library in $LIB_LIST; do
        if [ "$library" = "$dst" ]; then
            LD_PRELOAD="$dst"
            export LD_PRELOAD
        fi
    done
fi
procIdCtr=`expr $procIdCtr + 1`
done

# If additional operations are required for this package, place
# those package-specific commands here.

#XXXSpecial_CommandsXXX#

#
# Release the dynamic libraries
#
for library in $LIBS_USED; do
    $RM -f $library
done

```

(continued)

```
exit 0
```

The postinstall Script

The `postinstall` script creates the backout package using the information provided by the other scripts. Since the `pkgmk` and `pkgtrans` commands do not require the package database, they can be executed within a package installation.

In the example, undoing the patch is permitted by constructing a stream format package in the save directory (using the `PKGSAV` environment variable). It is not obvious, but this package must be in stream format, because the save directory gets moved around during a `pkgadd` operation. If the `pkgadd` command is applied to a package in its own save directory, assumptions about where the package source is at any given time become very unreliable. A stream format package is unpacked into a temporary directory and installed from there. (A directory format package would begin installing from the save directory and find itself suddenly relocated during a `pkgadd` fail-safe operation.)

To determine which patches are applied to a package, use this command:

```
pkgparam SUNWstuf PATCHLIST
```

With the exception of `PATCHLIST`, which is a Sun public interface, there is nothing significant in the parameter names in this example. Instead of `PATCH` you could use the traditional `SUNW_PATCHID` and the various other lists such as `PATCH_EXCL` and `PATCH_REQD` could be renamed accordingly.

If certain patch packages depend upon other patch packages which are available from the same medium, the `checkinstall` script could determine this and create a script to be executed by the `postinstall` script in the same way that the upgrade example (see “Upgrading Packages” on page 171) does.

```
# This script creates the backout package for a patch package
#
# directory format options.
#
# @(#) postinstall 1.6 96/01/29 SMI
#
# Copyright (c) 1995 by Sun Microsystems, Inc.
# All rights reserved
#
# Description:
```

(continued)

```

#       Set the TYPE parameter for the remote file
#
# Parameters:
#       none
#
# Globals set:
#       TYPE

set_TYPE_parameter () {
    if [ ${PATCH_UNDO_ARCHIVE:????} = "/dev" ]; then
        # handle device specific stuff
        TYPE="removable"
    else
        TYPE="filesystem"
    fi
}

#
# Description:
#       Build the remote file that points to the backout data
#
# Parameters:
#       $1:       the un/compressed undo archive
#
# Globals set:
#       UNDO, STATE

build_remote_file () {
    remote_path=${PKGSAV}/${Patch_label}/remote
    set_TYPE_parameter
    STATE="active"

    if [ $1 = "undo" ]; then
        UNDO="undo"
    else
        UNDO="undo.Z"
    fi

    cat > $remote_path << EOF
# Backout data stored remotely
TYPE=$TYPE
FIND_AT=$ARCHIVE_DIR/$UNDO
STATE=$STATE
EOF
}

PATH=/usr/sadm/bin:$PATH

if [ "$PKG_INSTALL_ROOT" = "/" ]; then
    PKG_INSTALL_ROOT=""
fi

if [ -n "$PATCH_BUILD_DIR" -a -d "$PATCH_BUILD_DIR" ]; then
    BUILD_DIR="$PATCH_BUILD_DIR/${Patch_label}.${PKGINST}"

```

(continued)


```

else
    BUILD_DIR="$PKG_INSTALL_ROOT/var/tmp/$Patch_label.$PKGINST"
fi

if [ ! -n "$PATCH_UNDO_ARCHIVE" ]; then
    PATCH_UNDO_ARCHIVE="none"
fi

FILE_DIR=$BUILD_DIR/files
RELOC_DIR=$FILE_DIR/reloc
ROOT_DIR=$FILE_DIR/root
BO_Deletes=$FILE_DIR/deletes
THIS_DIR=`dirname $0`
PROTO_FILE=$BUILD_DIR/prototype
TEMP_REMOTE=$PKGSAB/$Patch_label/temp

if [ "$PATCH_PROGRESSIVE" = "true" ]; then
    # remove the scripts that are left behind
    install_scripts=`dirname $0`
    rm $install_scripts/checkinstall \
$install_scripts/patch_checkinstall $install_scripts/patch_postinstall

    # If this is being used in an old-style patch, insert
    # the old-style script commands here.

    #XXXOld_CommandsXXX#

    exit 0
fi
#
# At this point we either have a deletes file or we don't. If we do,
# we create a prototype entry.
#
if [ -f $BO_Deletes ]; then
    echo "i deletes=$BO_Deletes" >> $BUILD_DIR/prototype
fi

#
# Now delete everything in the deletes list after transferring
# the file to the backout package and the entry to the prototype
# file. Remember that the pkgmap will get the CLIENT_BASEDIR path
# but we have to actually get at it using the BASEDIR path. Also
# remember that removef will import our PKG_INSTALL_ROOT
#
Our_Deletes=$THIS_DIR/deletes
if [ -f $Our_Deletes ]; then
    cd $BASEDIR

    cat $Our_Deletes | while read path; do
        Reg_File=0

        if valpath -l $path; then
            Client_Path="$CLIENT_BASEDIR/$path"
            Build_Path="$RELOC_DIR/$path"

```

(continued)

```

        Proto_Path=$BASEDIR/$path
    else
        # It's an absolute path
        Client_Path=$path
        Build_Path="$ROOT_DIR$path"
        Proto_Path=$PKG_INSTALL_ROOT$path
    fi

    # Note: If the file isn't really there, pkgproto
    # doesn't write anything.
    LINE='pkgproto $Proto_Path=$path'
    ftype='echo $LINE | nawk '{ print $1 }''
    if [ $ftype = "f" ]; then
        Reg_File=1
    fi

    if [ $Reg_File = 1 ]; then
        # Add source file to the prototype entry
        if [ "$Proto_Path" = "$path" ]; then
            LINE='echo $LINE | sed -e s@$Proto_Path@$Build_Path@2\'
        else
            LINE='echo $LINE | sed -e s@$Proto_Path@$Build_Path@\'
        fi

        DirName='dirname $Build_Path'
        # make room in the build tree
        mkdir -p $DirName
        cp -p $Proto_Path $Build_Path
    fi

    # Insert it into the prototype file
    echo $LINE 1>>$PROTO_FILE 2>/dev/null

    # Remove the file only if it's OK'd by removef
    rm `removef $PKGINST $Client_Path` 1>/dev/null 2>&1

done
removef -f $PKGINST

rm $Our_Deletes
fi

#
# Unless specifically denied, make the backout package.
#
if [ "$PATCH_NO_UNDO" != "true" ]; then
    cd $BUILD_DIR    # We have to build from here.

    if [ "$PATCH_UNDO_ARCHIVE" != "none" ]; then
        STAGE_DIR="$PATCH_UNDO_ARCHIVE"
        ARCHIVE_DIR="$PATCH_UNDO_ARCHIVE/$Patch_label/$PKGINST"
        mkdir -p $ARCHIVE_DIR
        mkdir -p $PKGSAB/$Patch_label
    else
        if [ -d $PKGSAB/$Patch_label ]; then
            rm -r $PKGSAB/$Patch_label
        fi
    fi
fi

```

(continued)

```

        fi
        STAGE_DIR=$PKGSAB
        ARCHIVE_DIR=$PKGSAB/$Patch_label
        mkdir $ARCHIVE_DIR
    fi

    pkgmk -o -d $STAGE_DIR 1>/dev/null 2>&1
    pkgtrans -s $STAGE_DIR $ARCHIVE_DIR/undo $PKG 1>/dev/null 2>&1
    compress $ARCHIVE_DIR/undo
    retcode=$?
    if [ "$PATCH_UNDO_ARCHIVE" != "none" ]; then
        if [ $retcode != 0 ]; then
            build_remote_file "undo"
        else
            build_remote_file "undo.Z"
        fi
    fi
    rm -r $STAGE_DIR/$PKG

    cd ..
    rm -r $BUILD_DIR
    # remove the scripts that are left behind
    install_scripts='dirname $0'
    rm $install_scripts/checkinstall $install_scripts/patch\
checkinstall $install_scripts/patch_postinstall
fi

#
# Since this apparently worked, we'll mark as obsoleted the prior
# versions of this patch - installpatch deals with explicit obsoletions.
#
cd ${PKG_INSTALL_ROOT:-/}
cd var/sadm/pkg

active_base='echo $Patch_label | nawk '
    { print substr($0, 1, match($0, "Patchvers_pfx")-1) } ''

List='ls -d $PKGINST/save/${active_base}*'
if [ $? -ne 0 ]; then
    List=""
fi

for savedir in $List; do
    patch='basename $savedir'
    if [ $patch = $Patch_label ]; then
        break
    fi

    # If we get here then the previous patch gets deleted
    if [ -f $savedir/undo ]; then
        mv $savedir/undo $savedir/obsolete
        echo $Patch_label >> $savedir/obsoleted_by
    elif [ -f $savedir/undo.Z ]; then
        mv $savedir/undo.Z $savedir/obsolete.Z
    fi
done

```

(continued)

```

        echo $Patch_label >> $savedir/obsoleted_by
    elif [ -f $savedir/remote ]; then
        'grep . $PKGSAV/$patch/remote | sed 's/STATE=.* /STATE=obsolete/'
' > $TEMP_REMOTE'
        rm -f $PKGSAV/$patch/remote
        mv $TEMP_REMOTE $PKGSAV/$patch/remote
        rm -f $TEMP_REMOTE
        echo $Patch_label >> $savedir/obsoleted_by
    elif [ -f $savedir/obsolete -o -f $savedir/obsolete.Z ]; then
        echo $Patch_label >> $savedir/obsoleted_by
    fi
done

# If additional operations are required for this package, place
# those package-specific commands here.

#XXXSpecial_CommandsXXX#

exit 0

```

The patch_checkinstall Script

```

# checkinstall script to validate backing out a patch.
# directory format option.
#
#      @(#)patch_checkinstall 1.2 95/10/10 SMI
#
# Copyright (c) 1995 by Sun Microsystems, Inc.
# All rights reserved
#

PATH=/usr/sadm/bin:$PATH

LATER_MSG="PaTch_MsG 6 ERROR: A later version of this patch is applied."
NOPATCH_MSG="PaTch_MsG 2 ERROR: Patch number $ACTIVE_PATCH is not installed"
NEW_LIST=""

# Get OLDLIST
. $1

#
# Confirm that the patch that got us here is the latest one installed on
# the system and remove it from PATCHLIST.
#

```

(continued)

```

Is_Inst=0
Skip=0
active_base='echo $ACTIVE_PATCH | nawk '
    { print substr($0, 1, match($0, "Patchvers_pfx")-1) } ''
active_inst='echo $ACTIVE_PATCH | nawk '
    { print substr($0, match($0, "Patchvers_pfx")+1) } ''
for patchappl in ${OLDLIST}; do
    appl_base='echo $patchappl | nawk '
        { print substr($0, 1, match($0, "Patchvers_pfx")-1) } ''
    if [ $appl_base = $active_base ]; then
        appl_inst='echo $patchappl | nawk '
            { print substr($0, match($0, "Patchvers_pfx")+1) } ''
        result='expr $appl_inst \> $active_inst'
        if [ $result -eq 1 ]; then
            puttext "$LATER_MSG"
            exit 3
        elif [ $appl_inst = $active_inst ]; then
            Is_Inst=1
            Skip=1
        fi
    fi
    if [ $Skip = 1 ]; then
        Skip=0
    else
        NEW_LIST="${NEW_LIST} $patchappl"
    fi
done

if [ $Is_Inst = 0 ]; then
    puttext "$NOPATCH_MSG"
    exit 3
fi

#
# OK, all's well. Now condition the key variables.
#
echo "PATCHLIST=${NEW_LIST}" >> $1
echo "Patch_label=" >> $1
echo "PATCH_INFO_$ACTIVE_PATCH=backded out" >> $1

# Get the current PATCH_OBSOLETEs and condition it
Old_ObsoleteS=$PATCH_OBSOLETEs

echo $ACTIVE_OBSOLETEs | sed 'y/\ /\\n/' | \
nawk -v PatchObsList="$Old_ObsoleteS" '
    BEGIN {
        printf("PATCH_OBSOLETEs=");
        PatchCount=split(PatchObsList, PatchObsComp, " ");

        for(PatchIndex in PatchObsComp) {
            Atisat=match(PatchObsComp[PatchIndex], "@");
            PatchObs[PatchIndex]=substr(PatchObsComp[PatchIndex], \
0, Atisat-1);
            PatchObsCnt[PatchIndex]=substr(PatchObsComp\

```

(continued)

```

[PatchIndex], Atisat+1);
    }
}
{
    for(PatchIndex in PatchObs) {
        if (PatchObs[PatchIndex] == $0) {
            PatchObsCnt[PatchIndex]=PatchObsCnt[PatchIndex]-1;
        }
    }
    next;
}
END {
    for(PatchIndex in PatchObs) {
        if ( PatchObsCnt[PatchIndex] > 0 ) {
            printf("%s@%d ", PatchObs[PatchIndex], PatchObsCnt\
[PatchIndex]);
        }
    }
    printf("\n");
} ' >> $1

# remove the used parameters
echo "ACTIVE_OBSOLETEES=" >> $1
echo "Obsoletes_label=" >> $1

exit 0

```

The patch_postinstall Script

```

# This script deletes the used backout data for a patch package
# and removes the deletes file entries.
#
# directory format options.
#
#      @(#)patch_postinstall 1.2 96/01/29 SMI
#
# Copyright (c) 1995 by Sun Microsystems, Inc.
# All rights reserved
#
PATH=/usr/sadm/bin:$PATH
THIS_DIR=`dirname $0`

Our_Deletes=$THIS_DIR/deletes

#

```

(continued)

```

# Delete the used backout data
#
if [ -f $Our_Deletes ]; then
    cat $Our_Deletes | while read path; do
        if valpath -l $path; then
            Client_Path=`echo "$CLIENT_BASEDIR/$path" | sed s@//@/`
        else
            # It's an absolute path
            Client_Path=$path
        fi
        rm `removef $PKGINST $Client_Path`
    done
    removef -f $PKGINST
rm $Our_Deletes
fi

#
# Remove the deletes file, checkinstall and the postinstall
#
rm -r $PKGSAB/$ACTIVE_PATCH
rm -f $THIS_DIR/checkinstall $THIS_DIR/postinstall

exit 0

```

Upgrading Packages

The process of upgrading a package is very different from that of overwriting a package. While there are special tools to support the upgrade of standard packages delivered as part of the Solaris operating environment, an unbundled package can be designed to support its own upgrade—several previous examples described packages that look ahead and control the precise method of installation under the direction of the administrator. You can design the `request` script to support direct upgrade of a package as well. If the administrator chooses to have one package install so as to completely replace another, leaving no residual obsolete files, the package scripts can do this.

The `request` script and `postinstall` script in this example provide a simple upgradable package. The `request` script communicates with the administrator and then sets up a simple file in the `/tmp` directory to remove the old package instance. (Although the `request` script creates a file (which is forbidden), it is okay because everyone has access to `/tmp`).

The `postinstall` script then executes the shell script in `/tmp`, which executes the necessary `pkgrm` command against the old package and then deletes itself.

This example illustrates a basic upgrade. It is less than fifty lines of code including some fairly long messages. It could be expanded to backout the upgrade or make other major transformations to the package as required by the designer.

The design of the user interface for an upgrade option must be absolutely sure that the administrator is fully aware of the process and has actively requested upgrade rather than parallel installation. There is nothing wrong with performing a well understood complex operation like upgrade as long as the user interface makes the operation clear.

The request Script

```
# request script
control an upgrade installation

PATH=/usr/sadm/bin:$PATH
UPGR_SCRIPT=/tmp/upgr.$PKGINST

UPGRADE_MSG="Do you want to upgrade the installed version ?"

UPGRADE_HLP="If upgrade is desired, the existing version of the \
package will be replaced by this version. If it is not \
desired, this new version will be installed into a different \
base directory and both versions will be useable."

UPGRADE_NOTICE="Conflict approval questions may be displayed. The \
listed files are the ones that will be upgraded. Please \
answer \"y\" to these questions if they are presented."

pkginfo -v 1.0 -q SUNWstuf.*

if [ $? -eq 0 ]; then
    # See if upgrade is desired here
    response=`ckeyorn -p "$UPGRADE_MSG" -h "$UPGRADE_HLP"`
    if [ $response = "y" ]; then
        OldPkg=`pkginfo -v 1.0 -x SUNWstuf.* | nawk ' \
/SUNW/{print $1}'`
        # Initiate upgrade
        echo "PATH=/usr/sadm/bin:$PATH" > $UPGR_SCRIPT
        echo "sleep 3" >> $UPGR_SCRIPT
        echo "echo Now removing old instance of $PKG" >> \
$UPGR_SCRIPT
        if [ ${PKG_INSTALL_ROOT} ]; then
            echo "pkgrm -n -R $PKG_INSTALL_ROOT $OldPkg" >> \
$UPGR_SCRIPT
        else

```

(continued)


```

        echo "pkgrm -n $OldPkg" >> $UPGR_SCRIPT
    fi
    echo "rm $UPGR_SCRIPT" >> $UPGR_SCRIPT
    echo "exit $?" >> $UPGR_SCRIPT

    # Get the original package's base directory
    OldBD='pkgparam $OldPkg BASEDIR'
    echo "BASEDIR=$OldBD" > $1
    puttext -l 5 "$UPGRADE_NOTICE"
else
    if [ -f $UPGR_SCRIPT ]; then
        rm -r $UPGR_SCRIPT
    fi
fi
fi

exit 0

```

The postinstall Script

```

# postinstall
to execute a simple upgrade

PATH=/usr/sadm/bin:$PATH
UPGR_SCRIPT=/tmp/upgr.$PKGINST

if [ -f $UPGR_SCRIPT ]; then
    sh $UPGR_SCRIPT &
fi

exit 0

```


Glossary

application binary interface ABI	Definition of the binary system interface between compiled applications and the operating system on which they run. See application binary interface (ABI).
base directory	The location where relocatable objects will be installed. It is defined in the <code>pkginfo</code> file, using the <code>BASEDIR</code> parameter.
build time	The time during which a package is being built with the <code>pkgmk</code> command.
build variable	A variable that begins with a lowercase letter and is evaluated at build time.
class	A name that is used to group package objects. See also class action script.
class action script	A file that defines a set of actions to be performed on a group of package objects.
collectively relocatable object	A package object that is located relative to a common installation base. See also base directory.
composite package	A package that contains both relocatable and absolute path names.
compver file	A method of specifying package backward-compatibility.
control file	File that controls how, where, and if a package is to be installed. See information file and installation script.
copyright	The right to own and sell intellectual property, such as software, source code, or documentation. Ownership must be stated on the

CD-ROM and insert text, whether the copyright is owned by SunSoft, or by another party. Copyright ownership is also acknowledged in SunSoft documentation.

depend file	A method of resolving basic package dependencies. See also <code>compver</code> file.
incompatible package	A package that is incompatible with the named package. See also <code>depend</code> file.
individually relocatable object	A package object that is not restricted to the same directory location as a collectively relocatable object. It is defined using an <code>install</code> variable in the <i>path</i> field in the <code>prototype</code> file, and the installation location is determined via a <code>request</code> script or a <code>checkinstall</code> script.
information file	A file that can define package dependencies, provide a copyright message, or reserve space on a target system.
installation script	A script that enables you to provide customized installation procedures for a package.
install time	The time during which a package is being installed with the <code>pkgadd</code> command.
install variable	A variable that begins with an uppercase letter and is evaluated at install time.
package	A collection of files and directories required for a software application.
package abbreviation	A short name for a package that is defined via the <code>PKG</code> parameter in the <code>pkginfo</code> file.
package identifier	A numerical suffix added to a package abbreviation by the <code>pkgadd</code> command.
package instance	A variation of a package, which is determined by combining the definitions of the <code>PKG</code> , <code>ARCH</code> , and <code>VERSION</code> parameters in the <code>pkginfo</code> file for the package.
package object	Another name for an application file that is contained in a package to be installed on a target system.
parametric path name	A path name that includes a variable specification.

patch list	A list of patches that affect the current package. This list of patches is recorded in the installed package in the <code>pkginfo</code> file.
prerequisite package	A package that depends on the existence of another package. See also <code>depend</code> file.
procedure script	A script that defines actions that occur at a particular point during package installation and package removal.
relocatable	A package object defined in a <code>prototype</code> file with a relative path name.
relocatable object	A package object that does not need an absolute path location on a target system. Instead, its location is determined during the installation process. See also collectively relocatable object and individually relocatable object.
reverse dependency	A condition when another package depends on the existence of your package. See also <code>depend</code> file.
segmented	A package that does not fit on a single volume, such as a floppy disk.
<code>tar</code>	Tape archive retrieval. Solaris command for adding or extracting files from a media.

Index

A

- absolute package, 137
 - traditional example, 138
- administrative defaults file, 122
- awk class, 65
 - script, 66

B

- base directory, 22, 121
 - in the administrative defaults file, 122
 - using parametric path names, 124
 - using the BASEDIR parameter, 123
 - walking the, 126, 127
 - example, 129, 133
- build class, 65
 - in a case study, 107
 - script, 67
 - in a case study, 107
- build time, 13
- build variable
 - description, 13
- building a package, 34
 - the process, 11
- bundled packages, 140

C

- CD-ROM drives
 - software installation and
 - from mounted CD to diskless client, 76
- checking package installation, 76
 - the process, 71

- checkinstall script, 5, 44, 50, 51, 123, 126, 127, 131, 150
 - and environment variables, 52
 - design rules, 58
 - how to write a, 58
 - writing a, 57
- class action script, 5, 50, 51, 64, 158
 - behaviors, 64
 - design rules, 65
 - how to write a, 68
 - in a case study, 96, 97, 101, 102, 110
 - naming conventions, 64
- classes, *see* object classes,
- clients
 - installing packages to, 75
- collectively relocatable object, 22
- composite, 139
- composite package
 - example, 141, 142, 144
 - rules for constructing, 140
 - traditional example, 139
- compver file, 4
 - description, 44
 - example, 46
 - how to write, 44
 - in a case study, 99
- control files
 - See also* information files and installation scripts,
- copyright file, 4
 - example, 48
 - how to write, 47
 - in a case study, 98, 119

writing a, 47

D

depend file, 4
 description, 44
 example, 46
 how to write, 44
 in a case study, 99

E

exit codes for scripts, 54

G

guidelines, packaging, 5

I

incompatible package, 44
individually relocatable object, 22, 23
install time, 13
install variable
 description, 13
installation environment variables, 52
installation scripts
 and environment variables, 52
 characteristics, 5
 creating, 50
 exit codes, 54
 obtaining package information, 54
 processing of, 51
 requirements for, 50
 types of, 5, 50
installation software database, 73
installf command, 60, 63
 in a case study, 96, 114
installing classes, 62
installing packages on a standalone or server
 example, 147
installing packages to clients, 75
 example, 146

L

links
 defining in a prototype file, 25, 30

M

mounting shared file systems
 example, 148

O

object classes, 22, 62
 installing, 51, 62
 removing, 51, 63
 system, 50, 65
 awk, 65
 build, 65
 sed, 65

P

package
 See also object classes
 classes,
 absolute, 138
 base directory, 22
 checking installation, 76
 the process, 71
 commands, 7
 components, 2
 composite, 139
 control files
 information files, 2
 installation scripts, 2
 defining dependencies, 44
 description, 2
 design criteria, 5
 environment variables, 13, 52
 how to build, 35
 how to install, 74
 how to organize, 18
 information files, 9
 installation scripts, 9
 installing to clients, 75
 object, 3
 classes, 62
 path names, 22, 24
 relocatable, 22
 optional components, 4
 organization, 18
 patching, 148
 relocatable, 136

- required components, 3
 - status, 73
 - transferring to media, 87
 - upgrading, 171
- package abbreviation
 - description, 16
 - requirements, 16
- package components, 2
 - optional, 4
 - required, 3
- package dependencies
 - how to define, 44
- package identifier
 - description, 15
- package instance
 - description, 15
- packaging guidelines, 5
- parametric path name, 90, 124, 132
 - description, 23
 - example, 125
 - in a case study, 91
- patch list, 150
- patching packages, 148
- pkgadd command, 62, 72
 - and class installation, 62
 - and directories, 145
 - and disk space, 48
 - and installation problems, 73
 - and installation scripts, 50
 - and package identifiers, 15
 - and patching packages, 148
 - and request scripts, 55
 - and script processing, 51
 - and the administrative defaults file, 122
 - and the installation software database, 73
 - standalone systems and, 85
- pkgask command, 56
- pkgchk command, 37, 73, 76
- pkginfo command, 54, 73, 81
 - and package parameters, 82
 - customizing the output, 81
- pkginfo file, 2, 125, 127, 132, 137, 139, 144
 - creating a, 15
 - description, 4, 15
 - determining the base directory, 123
 - example, 18
 - how to create, 17
 - in a case study, 91, 95, 98, 101, 104, 107, 109, 112, 116
 - required parameters, 15
 - using environment variables in, 13
- pkgmap file, 34, 48, 51, 60, 62, 65, 77, 94, 125, 128, 132, 137 to 139, 145
- pkgmk command, 2, 13, 22, 28, 30 to 32, 82, 163
 - building a package, 34
- pkgparam command, 54, 79, 163
- pkgproto command, 38, 154
 - creating a prototype file, 20
 - in a case study, 117
- pkgrm command, 118, 143, 172
 - and class removal, 63
 - and directories, 146
 - and script processing, 51
 - and the installation software database, 73
 - basic procedure, 85
 - rR option (diskless and AutoClient systems), 86
 - rm command vs., 85
- pkgtrans command, 87, 163
- postinstall script, 51, 60, 163, 171, 173
 - in a case study, 105, 114, 118
 - installing package objects, 60
- postremove script, 52, 60
 - removing package objects, 60
- preinstall script, 51, 60, 154
- preremove script, 51, 60
 - in a case study, 114, 119
- prerequisite package, 44
- procedure scripts, 5, 50
 - behaviors, 60
 - design rules, 60
 - how to write, 61
 - predefined names of, 5, 50, 60
 - writing, 60
- prototype file, 2

- adding functionality to, 29
 - creating links at install time, 30
 - creating objects at install time, 30
 - distributing packages over multiple volumes, 30
 - nesting prototype files, 31
 - setting default values, 31
 - setting environment variables, 32
 - specifying a search path, 31
- creating, 20
- creating a
 - from scratch, 26
 - with the pkgproto command, 26
- description, 4, 20
- fine-tuning a, 27
 - example, 29
- format of, 20
- how to create, 32
- in a case study, 92, 95, 101, 104, 107, 109, 112, 116
- using environment variables in, 13
- valid file types, 21

R

- relocatable object, 22
- relocatable package, 136
 - traditional example, 136
- relocation
 - supporting in a heterogeneous environment, 135
- removef command, 61, 85, 149
 - in a case study, 114
- removing classes, 63
- request script, 5, 44, 50, 51, 89, 126 to 129, 149, 171, 172
 - and environment variables, 52
 - and package removal, 52

- behaviors, 55, 58
- design rules, 55
- example, 57, 59
- how to write a, 56
- in a case study, 92, 113
- writing a, 55
- reserving additional space on a target system, 48
- reverse dependency, 44

S

- scripts, *see* installation scripts,
- sed class
 - script, 66
 - in a case study, 104, 118
- software package, *see* package,
- space file, 4, 48
 - example, 49
 - how to create a, 48
 - in a case study, 96
- system object classes, 65

T

- transferring a package to a distribution medium, 87

U

- unbundled packages, 75, 140
- upgrading packages, 171

V

- verifying package installation, 76
 - the process, 71