
DECams User's Guide

December 1995

This guide explains how to use DECams software to detect and fix system availability problems. It also explains how to install DECams.

Revision/Update Information: This guide supersedes the *DECams User's Guide*, Version 6.2.

Operating System and Version: OpenVMS Alpha Version 7.0
OpenVMS VAX Version 7.0

Software Version: DECams Version 7.0

**Digital Equipment Corporation
Maynard, Massachusetts**

December 1995

Digital Equipment Corporation makes no representations that the use of its products in the manner described in this publication will not infringe on existing or future patent rights, nor do the descriptions contained in this publication imply the granting of licenses to make, use, or sell equipment or software in accordance with the description.

Possession, use, or copying of the software described in this publication is authorized only pursuant to a valid written license from Digital or an authorized sublicensor.

Digital conducts its business in a manner that conserves the environment and protects the safety and health of its employees, customers, and the community.

© Digital Equipment Corporation 1995. All rights reserved.

The postpaid Reader's Comments forms at the end of this document request your critical evaluation to assist in preparing future documentation.

The following are trademarks of Digital Equipment Corporation: AXP, Bookreader, DEC, DECams, DECdirect, DECnet, DECwindows, Digital, MicroVAX, OpenVMS, POLYCENTER, TK, VAX, VAXcluster, VAXft, VAXserver, VAXstation, VMS, VMScluster, and the DIGITAL logo.

The following are third-party trademarks:

IEEE is a registered trademark of the Institute of Electrical and Electronics Engineers, Inc.

Motif is a registered trademark of the Open Software Foundation, Inc.

OSI is a registered trademark of CA Management, Inc.

All other trademarks and registered trademarks are the property of their respective holders.

ZK5929

This document is available on CD-ROM.

Contents

Preface	ix
1 Overview of DECamds	
1.1 How Does DECamds Work?	1-1
1.2 System Requirements for DECamds	1-3
1.3 Security Features	1-4
1.3.1 Understanding DECamds Security Files	1-5
1.3.2 Customizing Security Files	1-7
1.3.2.1 Setting Up Node Groups	1-8
1.3.2.2 Defining Data Exchange Access Between Nodes	1-8
1.3.2.3 Defining Read Access for Specific Users	1-9
1.3.3 Sending Messages to OPCOM	1-9
1.3.4 Setting Broadcast Intervals for Node Availability Messages	1-10
2 Getting Started	
2.1 Starting DECamds	2-1
2.2 Using the System Overview Window	2-2
2.2.1 Expanding and Collapsing Group Information	2-4
2.2.2 Displaying Additional Data	2-4
2.2.3 Stopping Data Collection	2-5
2.3 Using the Event Log Window	2-5
2.3.1 Displaying Information About an Event Log Entry	2-8
2.3.2 Performing Corrective Action on an Event Log Entry	2-8
2.3.3 Sending Event Information to OPCOM	2-9
2.3.4 Removing an Event from the Event Log Window	2-9
2.3.5 Retaining and Releasing an Event in the Event Log Window	2-9
3 Managing DECamds Data Windows	
3.1 CPU Modes Summary Window	3-3
3.2 CPU Summary Window	3-4
3.3 Disk Status Summary Window	3-5
3.4 Volume Summary Window	3-8
3.5 Single Disk Summary Window	3-9
3.6 Lock Contention Summary Window	3-11
3.7 Memory Summary Window	3-14
3.8 Node Summary Window	3-15
3.9 Page/Swap File Summary Window	3-18
3.10 Process I/O Summary Window	3-19
3.11 Single Lock Summary Window	3-21
3.12 Single Process Summary Window	3-23
3.13 Cluster Transition/Overview Summary Window	3-29

3.13.1	Data Displayed	3-31
3.13.2	Notes About the Display	3-32
3.13.3	New Event in Window	3-32
3.13.4	From This Window...	3-32
3.14	System Communication Architecture (SCA) Summary Window	3-33
3.14.1	Notes About the Display	3-34
3.14.2	New Event in Window	3-34
3.14.3	From This Window...	3-35
3.15	NISCA Summary Window	3-35
3.15.1	Data Displayed	3-37
3.15.2	Notes About the Display	3-40

4 Performing Fixes

4.1	Understanding Fixes	4-1
4.2	Performing Fixes	4-2
4.2.1	Adjust Working Set Fix	4-3
4.2.2	Change Process Priority Fix	4-4
4.2.3	Crash Node Fix	4-4
4.2.4	Exit Image and Delete Process Fixes	4-5
4.2.5	Purge Working Set Fix	4-6
4.2.6	Suspend Process and Resume Process Fixes	4-6
4.3	Examples for Fixing Low Memory Availability	4-7
4.3.1	Performing a Fix Using Automatic Fix Settings	4-7
4.3.2	Performing a Fix Using Manual Investigation	4-7

5 Customizing DECamds

5.1	Customizing DECamds Defaults	5-1
5.1.1	Setting Default Data Collection	5-3
5.1.2	Setting Automatic Event Investigation	5-3
5.1.3	Setting Automatic Lock Investigation	5-3
5.2	Filtering Data	5-4
5.2.1	Filtering Events	5-5
5.2.2	Customizing Events	5-7
5.3	Sorting Data	5-13
5.4	Setting Collection Intervals	5-14
5.5	Optimizing Performance with System Settings	5-16
5.5.1	Setting Process Quotas	5-17
5.5.2	Setting LAN Load	5-17
5.5.3	Setting Data Link Read Operations	5-18
5.5.4	Setting the Communications Buffer	5-18
5.5.5	Setting Window Customizations	5-18
5.6	Optimizing Performance with Hardware	5-19

A Installing DECamds

A.1	Preparing to Install DECamds	A-1
A.2	Kit Location and Installation Information	A-1
A.3	Installation Requirements	A-2
A.4	OpenVMS Alpha System Installation	A-4
A.5	OpenVMS VAX System Installation	A-6
A.6	Postinstallation Tasks on Data Provider Nodes	A-13
A.6.1	Starting, Stopping, and Reloading DECamds	A-14

A.7	Postinstallation Tasks on the Data Analyzer Node	A-14
A.8	Determining and Reporting Problems	A-15
A.9	Running the Installation Verification Procedure Separately	A-15

B Files and Logical Names

B.1	Files and Logical Names for the Data Analyzer Node	B-1
B.2	Files and Logical Names for the Data Provider Nodes	B-2
B.3	Log Files	B-4
B.4	Event Log File	B-4
B.5	Lock Contention Log File	B-6
B.6	OPCOM Log	B-6

Glossary

Index

Examples

A-1	Sample OpenVMS Alpha Installation	A-5
A-2	Sample OpenVMS VAX Installation	A-10
B-1	Sample Event Log File	B-5
B-2	Sample Lock Contention Log File	B-6

Figures

1-1	DECamds Processing	1-3
2-1	System Overview Window	2-2
2-2	System Overview Window Menus	2-4
2-3	Event Log Window	2-6
2-4	Event Log Window Menus	2-7
2-5	Event Display Choice Dialog Box	2-8
3-1	DECamds Data Window Hierarchy	3-2
3-2	CPU Modes Summary Window	3-3
3-3	CPU Summary Window	3-4
3-4	Disk Status Summary Window	3-6
3-5	Volume Summary Window	3-8
3-6	Single Disk Summary Window	3-10
3-7	Lock Contention Summary Window	3-12
3-8	Filtering Lock Events	3-13
3-9	Memory Summary Window	3-14
3-10	Node Summary Window	3-16
3-11	Page/Swap File Summary Window	3-18
3-12	Process I/O Summary Window	3-19
3-13	Single Lock Summary Window	3-21
3-14	Single Process Summary Window	3-23
3-15	Cluster Transition/Overview Summary Window	3-30
3-16	SCA Summary Window	3-33

3-17	NISCA Summary Window	3-36
4-1	FIX Adjust Working Set Size Dialog Box	4-3
4-2	FIX Process Priority Dialog Box	4-4
4-3	FIX Crash Node Dialog Box	4-5
4-4	FIX Process State Dialog Box — Exit Image or Delete Process	4-5
4-5	FIX Purge Working Set Dialog Box	4-6
4-6	FIX Process State Dialog Box — Suspend or Resume Process	4-6
4-7	Sample Fix Dialog Box	4-8
4-8	DECamds Memory Summary Window	4-8
4-9	DECamds Node Summary Window	4-9
5-1	DECamds Application Customizations Dialog Box	5-1
5-2	Event Qualification	5-5
5-3	CPU Summary Filtering Dialog Box	5-7
5-4	Customize Events Dialog Box	5-8
5-5	LOWSQU Event Customization Window	5-9
5-6	Memory Summary Sorting Dialog Box	5-13
5-7	Memory Summary Collection Interval Dialog Box	5-14

Tables

1-1	Security Triplet Format	1-5
1-2	Security Triplet Verification	1-7
1-3	DECamds Logical Names for OPCOM Messages	1-9
1-4	Broadcast Availability Logical Names	1-10
2-1	System Overview Window Display Fields	2-3
2-2	Event Log Window Display Fields	2-6
2-3	Event Log Filters	2-7
3-1	DECamds Data Windows	3-1
3-2	CPU Modes Summary Window Data Fields	3-4
3-3	CPU Summary Window Data Fields	3-5
3-4	Disk Status Summary Window Data Fields	3-6
3-5	Volume Summary Window Data Fields	3-9
3-6	Data Items in the Single Disk Summary Window	3-11
3-7	Lock Contention Summary Window Data Fields	3-12
3-8	Memory Summary Window Data Fields	3-15
3-9	Node Summary Window Data Fields	3-17
3-10	Page/Swap File Summary Window Data Fields	3-18
3-11	Process I/O Summary Window Data Fields	3-20
3-12	Single Lock Summary Window Data Fields	3-22
3-13	Single Process Summary Window Data Fields	3-24
3-14	Data Items in the Summary Panel of the Cluster Transition/Overview Summary Window	3-31
3-15	Data Items in the Cluster Members Panel of the Cluster Transition/Overview Summary Window	3-31
3-16	Data Items in the SCA Summary Window	3-34
3-17	Data Items in the Transmit Panel	3-37
3-18	Data Items in the Receive Panel	3-37

3-19	Data Items in the Congestion Control Panel	3-38
3-20	Data Items in the Channel Selection Panel	3-39
3-21	Data Items in the VC Closures Panel	3-39
3-22	Data Items in the Packets Discarded Panel	3-40
4-1	Summary of DECamds Fixes	4-2
5-1	DECamds Application Defaults	5-2
5-2	CPU, I/O, and Memory Class Definitions	5-11
5-3	Memory Summary Collection Interval Fields	5-15
5-4	Default Window Collection Intervals	5-15
5-5	LAN Load	5-17
5-6	Monitoring Nodes	5-19
A-1	Recommended System Requirements	A-2
B-1	Files on the DECamds Data Analyzer	B-1
B-2	Logical Names Defined for the Data Analyzer	B-2
B-3	Files on Nodes Running the Data Provider	B-3
B-4	Logical Names Defined on Nodes Running the Data Provider	B-3

Intended Audience

This guide is intended for system managers who install and use DECamsds software.

Document Structure

This guide contains the following chapters and appendixes:

- Chapter 1 describes an overview of DECamsds software, including system software and hardware requirements, security features, and customizing security files.
- Chapter 2 describes how to start DECamsds, using online help, the system overview window, and the event log window.
- Chapter 3 describes how to use the DECamsds data windows.
- Chapter 4 describes how to take corrective actions, called **fixes**, to improve system availability.
- Chapter 5 describes the tasks you can perform to filter, sort, and customize the displaying of system data using DECamsds. It also describes how some of these tasks can optimize the performance of DECamsds.
- Appendix A contains instructions for installing DECamsds.
- Appendix B contains a description of all files and logical names and gives examples of the log files that DECamsds writes.
- The Glossary defines terms used for DECamsds.

Related Documents

The following manuals provide additional information:

- *OpenVMS Version 7.0 Release Notes* describes features and changes that apply to DECamsds software.
- *OpenVMS Version 7.0 New Features Manual* describes new features available in DECamsds Version 7.0.
- *OpenVMS System Manager's Manual* describes tasks you perform to manage an OpenVMS system. It also describes installing a product with the POLYCENTER Software Installation utility.
- *OpenVMS System Management Utilities Reference Manual* describes utilities you use to manage an OpenVMS system.
- *VMS DECwindows User's Guide* explains how to use DECwindows features.

- *OpenVMS Programming Concepts Manual* explains OpenVMS lock management concepts.
- *OpenVMS License Management Utility Manual* explains how to use the License Management utility to register a product license.
- *OpenVMS System Messages: Companion Guide for Help Message Users* explains how to use Help Message.

For additional information on OpenVMS products and services, access the Digital OpenVMS World Wide Web site. Use the following URL:

<http://www.openvms.digital.com>

Reader's Comments

Digital welcomes your comments on this manual.

Print or edit the online form SYSSHELP:OPENVMSDOC_COMMENTS.TXT and send us your comments by:

Internet **openvmsdoc@zko.mts.dec.com**
 Fax 603 881-0120, Attention: OpenVMS Documentation, ZK03-4/U08
 Mail OpenVMS Documentation Group, ZK03-4/U08
 110 Spit Brook Rd.
 Nashua, NH 03062-2698

How To Order Additional Documentation

Use the following table to order additional documentation or information. If you need help deciding which documentation best meets your needs, call 800-DIGITAL (800-344-4825).

Telephone and Direct Mail Orders

Location	Call	Fax	Write
U.S.A.	DECdirect 800-DIGITAL 800-344-4825	Fax: 800-234-2298	Digital Equipment Corporation P.O. Box CS2008 Nashua, NH 03061
Puerto Rico	809-781-0505	Fax: 809-749-8300	Digital Equipment Caribbean, Inc. 3 Digital Plaza, 1st Street, Suite 200 P.O. Box 11038 Metro Office Park San Juan, Puerto Rico 00910-2138
Canada	800-267-6215	Fax: 613-592-1946	Digital Equipment of Canada, Ltd. Box 13000 100 Herzberg Road Kanata, Ontario, Canada K2K 2A6 Attn: DECdirect Sales
International	—	—	Local Digital subsidiary or approved distributor
Internal Orders	DTN: 264-4446 603-884-4446	Fax: 603-884-3960	U.S. Software Supply Business Digital Equipment Corporation 10 Cotton Road Nashua, NH 03063-1260

ZK-7654A-GE

Conventions

The name of the OpenVMS AXP operating system has been changed to OpenVMS Alpha. Any reference to OpenVMS AXP or AXP are synonymous with OpenVMS Alpha or Alpha.

The following conventions are used to identify information specific to OpenVMS Alpha or to OpenVMS VAX:

Alpha

The Alpha icon denotes the beginning of information specific to OpenVMS Alpha.

VAX

The VAX icon denotes the beginning of information specific to OpenVMS VAX.

◆

The diamond symbol denotes the end of a section of information specific to OpenVMS Alpha or to OpenVMS VAX.

In this guide, every use of DECwindows and DECwindows Motif refers to DECwindows Motif for OpenVMS software.

The following conventions are used in this guide:

Ctrl/*x*

A sequence such as Ctrl/*x* indicates that you must hold down the key labeled Ctrl while you press another key or a pointing device button.

PF1 (GOLD) *x*

A sequence such as PF1 *x* indicates that you must first press and release the key labeled PF1 (defined as the GOLD key), then press and release another key or a pointing device button.

The GOLD key definition is often mapped to the PF1 key on the keypad. GOLD key sequences can also have a slash (/), dash (-), or underscore (_) as a delimiter in EVE commands.

Return

In examples, a key name enclosed in a box indicates that you press a key on the keyboard. (In text, a key name is not enclosed in a box.)

...

A horizontal ellipsis in examples indicates one of the following possibilities:

- Additional optional arguments in a statement have been omitted.
- The preceding item or items can be repeated one or more times.
- Additional parameters, values, or other information can be entered.

.
. .
.

A vertical ellipsis indicates the omission of items from a code example or command format; the items are omitted because they are not important to the topic being discussed.

()

In format descriptions, parentheses indicate that, if you choose more than one option, you must enclose the choices in parentheses.

[]	In format descriptions, brackets indicate optional elements. You can choose one, none, or all of the options. (Brackets are not optional, however, in the syntax of a directory name in an OpenVMS file specification, or in the syntax of a substring specification in an assignment statement.)
{ }	In format descriptions, braces indicate a required choice of options; you must choose one of the options listed.
boldface text	Boldface text represents the introduction of a new term or the name of an argument, an attribute, or a reason. Boldface text is also used to show user input in Bookreader versions of the manual.
<i>italic text</i>	Italic text indicates important information, complete titles of manuals, or variables. Italic text also represents information that can vary in system messages (for example, Internal error <i>number</i>), command lines (for example, /PRODUCER= <i>name</i>), and command parameters in text.
UPPERCASE TEXT	Uppercase text indicates a command, the name of a routine, the name of a file, or the abbreviation for a system privilege.
-	A hyphen in code examples indicates that additional arguments to the request are provided on the line that follows.
numbers	All numbers in text are assumed to be decimal, unless otherwise noted. Nondecimal radices—binary, octal, or hexadecimal—are explicitly indicated.

Overview of DECamds

This chapter describes the following:

- Overview of DECamds
- System requirements for DECamds
- Security features

The Digital Availability Manager for Distributed Systems (DECamds) is a real-time monitoring, diagnostic, and correction tool that assists system managers to improve OpenVMS system and VMSccluster availability. DECamds is also helpful to system programmers/analysts to target a specific node or process for detailed analysis, and system operators and service technicians to help determine hardware and software issues.

DECamds simultaneously collects and analyzes system data and process data from multiple nodes and displays the output on a DECwindows Motif display. Based on the analyzed data, DECamds detects events and proposes actions to correct resource availability and system denial issues in real time.

DECamds helps to improve OpenVMS system and VMSccluster availability as follows:

Availability	Alerts users to resource availability problems, suggests paths for further investigation, and recommends actions to improve availability.
Centralized Management	Provides centralizing management of remote nodes within an extended local area network (LAN).
Intuitive Interface	Provides an easy-to-learn and easy-to-use DECwindows Motif user interface.
Correction Capability	Allows real-time intervention, including adjustment of node and process parameters, even when remote nodes are hung.
Customization	Adjusts to site-specific requirements through a wide range of customization options.
Scalability	Makes job monitoring multiple OpenVMS systems and VMSccluster systems easier over a single site or over multiple sites.

1.1 How Does DECamds Work?

DECamds is a client/server application. It is installed in two parts:

1. Data Provider: gathers system data and transmits it to the Data Analyzer.
2. Data Analyzer: receives data from the Data Provider, analyzes the data, and displays it.

Overview of DECamds

1.1 How Does DECamds Work?

A node that has the DECamds **Data Provider** installed announces its availability, using a multicast LAN message, to any DECamds **Data Analyzer** that is installed and running. The Data Analyzer receives the Data Provider's availability announcement and a communications link is established.

Note

The Data Provider runs at a high interrupt priority level (IPL), so it gathers data and transmits it to the Data Analyzer even if the Data Provider is on a remote node that is hung. However, because of the high IPL collection, the Data Provider cannot collect nonresident memory data, restricting some data collection in process space.

The Data Analyzer portion of DECamds is a DECwindows Motif application that runs on any OpenVMS system. Although you can run the Data Analyzer as a member of a monitored cluster, it is typically run on an OpenVMS system that is not a member of the cluster being monitored. You can have more than one Data Analyzer application executing in a LAN, but only one can be running at a time on each OpenVMS system.

System data are analyzed and translated into meaningful values and rates that are displayed in DECwindows Motif windows. The data are screened for data points that exceed thresholds that might cause system or VMScluster availability problems. The Data Analyzer can also implement various system correction options if authorized to do so.

The Data Analyzer and Data Provider nodes communicate over an Extended LAN using an IEEE 802.3 Extended Packet format protocol. Once a secure connection is established, the Data Analyzer instructs the Data Provider to gather specific system and process data.


Figure 1-1 illustrates the interaction of the Data Analyzer and Data Provider on nodes in a cluster.

Nodes A, C, D, E, F, and H can exchange information with the Data Analyzer. Node B has defined its security to exclude the Data Analyzer from accessing its system data. Node G has not installed DECamds and does not communicate with the Data Analyzer.

Overview of DECamds

1.1 How Does DECamds Work?

Figure 1–1 DECamds Processing

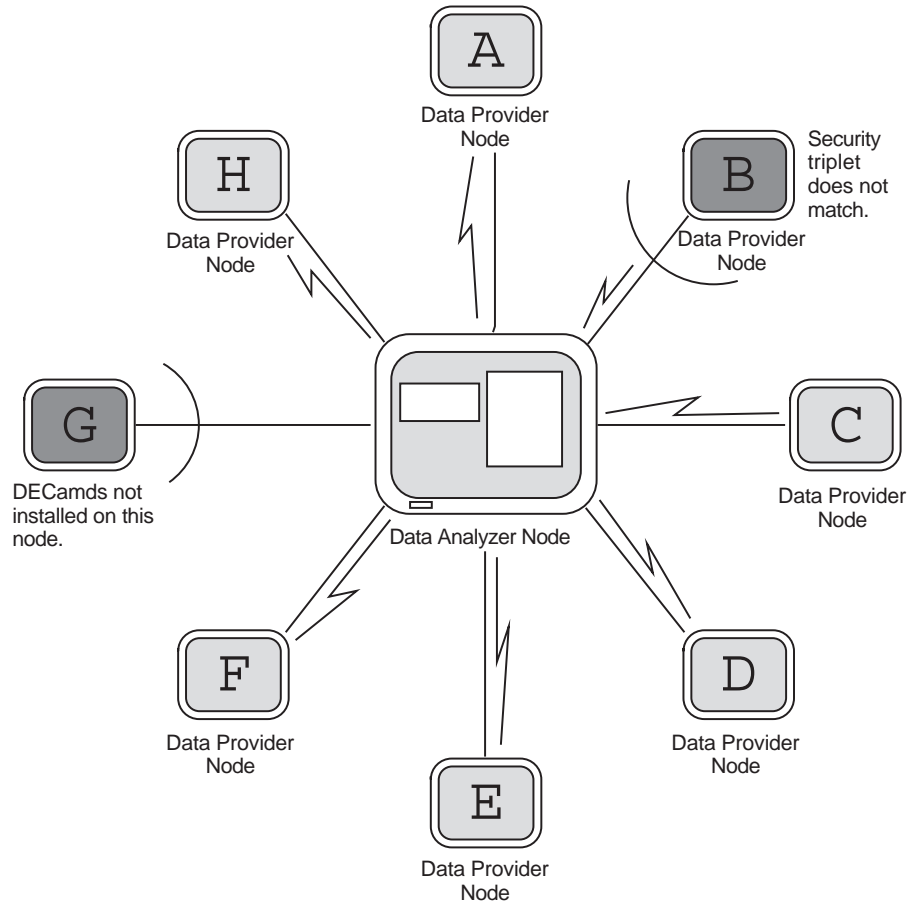

ZK-7946A-GE

1.2 System Requirements for DECamds

This section is an overview of DECamds system requirements. Appendix A describes the specific system hardware and software requirements for installing and running the DECamds Data Analyzer and Data Provider.

Any system that OpenVMS supports can install the DECamds Data Provider.

You can run the DECamds Data Analyzer from either a cluster member or a standalone system outside the cluster. However, Digital recommends that you run the Data Analyzer from outside a cluster because then you can monitor system information even if the nodes in the cluster pause or hang.

System requirements vary with the number of nodes to be monitored and the amount of data to be collected. See Appendix A for more information.

Overview of DECamds

1.3 Security Features

1.3 Security Features

DECamds has several security features, including the following:

- Private LAN transport

The DECamds protocol is based on the 802.3 Extended Packet Format (also known as SNAP). The IEEE DECamds protocol values are as follows:

```
Protocol ID:      08-00-2B-80-48
Multicast Address: 09-00-2B-02-01-09
```

If you filter protocols for bridges or routers in your network, add these values to your network protocols.

- DECamds data transfer security

Each node running DECamds as a Data Analyzer or a Data Provider has a file containing a list of three-part codes, called **security triplets**. See Section 1.3.1 for more information about triplets.

For Data Analyzer and Data Provider nodes to exchange data, at least one security triplet must match between the files on each system. Most DECamds nodes allow read access to view data collected from a node. Setting write access determines which nodes can act as the Data Analyzer to perform fixes.

- DECamds security log

The Data Provider logs all access denials and executed write instructions to OPCOM. Each log entry contains the network address of the initiator. If access is denied, the log entry also indicates whether a read or write was attempted. If a write operation was performed, the log entry indicates the process identification (PID) of the affected process.

- OpenVMS file protection and process privileges

When DECamds is installed, it sets directory and file protections on its system level directories so that only the SYSTEM account can read the files. For additional security on these system level directories and files, you can create access control lists (ACLs) to restrict and set alarms on write access to the security files. For more information about creating ACLs, see the *OpenVMS Guide to System Security*.

The AMDSSCONFIG logical translates to the location of the default security files, including the following:

- The AMDSSDRIVER_ACCESS.DAT file is installed on all Data Provider nodes. The file contains a list of Data Analyzer nodes to which system data can be sent. It also contains the type of access allowed for each of those nodes.
- The AMDSSCONSOLE_ACCESS.DAT file is installed on only those nodes that will run the Data Analyzer portion of DECamds. It contains a list of passwords to identify itself to Data Provider nodes.

You can create additional security files in the directory associated with the AMDSSCONFIG logical name. By default, this logical name is assigned to AMDSSSYSTEM. As you customize DECamds, you can change the logical assignment of AMDSSCONFIG to read input files from other locations.

The following sections describe what a security triplet is, where to find the security files, and how to set up your security files.

1.3.1 Understanding DECamds Security Files

A security triplet determines which systems can access system data from the node. The AMDS\$DRIVER_ACCESS.DAT and AMDS\$CONSOLE_ACCESS.DAT files on the Data Analyzer and Data Provider systems list security triplets.

A security triplet is a three-part record that is separated by backslashes (\) in either the AMDS\$DRIVER_ACCESS.DAT file or the AMDS\$CONSOLE_ACCESS.DAT file. A triplet consists of the following fields:

- A network address (DECnet address, hardware address, or a wildcard character)
- An 8-character (alphanumeric) password

The password is not case-sensitive, so the passwords “testtest” and “TESTTEST” are considered to be the same.

- A read or write (R or W) access verification code

The only restriction for the Data Analyzer is that the security triplets that allow write access are listed last in the AMDS\$CONSOLE_ACCESS.DAT security file.

The exclamation point (!) is a comment delimiter; any characters after the comment delimiter are ignored.

Table 1–1 describes the detailed format of each portion of the security triplet and then gives some examples for different situations.

Table 1–1 Security Triplet Format

Item	Description
DECnet Address (area.number)	Although DECnet is not required to run DECamds, the DECnet address is used to determine a node’s physical address. The DECnet address is created by using the <i>area.number</i> format, where area is a value from 1 to 63, and number is a value from 1 to 1023. This address is modified into a physical address of the form AA-00-04-00-xx-yy to conform to the standard IEEE 802.3 protocol for network addressing. The AA-00-04-00 prefix is associated with the Digital owned address. The xx-yy suffix is the hexadecimal representation of the address formula: area*1024+number

Note

If you are running on a system with more than one LAN adapter or are running DECnet/OSI networking software, then this format is not valid for you. Instead, you must use the hardware address or wildcard address format for this field.

(continued on next page)

Overview of DECamds

1.3 Security Features

Table 1–1 (Cont.) Security Triplet Format

Item	Description
Hardware Address (08-00-2B-xx-xx-xx)	<p>The hardware address field is the physical hardware address in the LAN adapter chip. It is used if you have multiple LAN adapters or are running the DECnet/OSI networking software on the system (as opposed to the DECnet Phase IV networking software).</p> <p>For adapters provided by Digital, the hardware address is in the form 08-00-2B-xx-xx-xx, where the 08-00-2B portion is Digital's valid range of LAN addresses as defined by the IEEE 802 standards and the xx-xx-xx portion is chip specific.</p> <p>To determine the value of the hardware address on a system, use the OpenVMS System Dump Analyzer (SDA) as follows:</p> <pre data-bbox="618 640 824 688">\$ ANALYZE/SYSTEM SDA> SHOW LAN</pre> <p>The previous commands display a list of available devices. Choose the template device of the LAN adapter you will be using and then enter the following command:</p> <pre data-bbox="618 804 935 825">SDA> SHOW LAN/DEVICE=xxA0</pre>
Wildcard Address (*)	<p>The wildcard character allows any incoming triplet with a matching password field to access the Data Provider node. Use the wildcard character to allow read access and to run the console application from any node in your network.</p> <p>Because the Data Analyzer does not use this field, you should use the wildcard character in this field in the AMDS\$CONSOLE_ACCESS.DAT file.</p>

Caution

Use of the wildcard character for write access security triplets enables any system to perform system-altering fixes.

The following steps show how DECamds uses the security triplets to ensure security among DECamds nodes:

1. A message is broadcast at regular intervals to all nodes within the LAN to indicate the availability of a node to communicate with a node that is running DECamds to gather system data.
2. The node running the Data Analyzer receives the availability message and returns a security triplet, identifying itself to the Data Provider, and requests system data from the Data Provider.
3. The Data Provider examines the security triplet to determine if the Data Analyzer is listed in the AMDS\$DRIVER_ACCESS.DAT file to permit access to the system.
 - If the AMDS\$DRIVER_ACCESS.DAT file lists Data Analyzer access information, then the Data Provider and the Data Analyzer can exchange information.

- If the Data Analyzer is not listed in the AMDSS\$DRIVER_ACCESS.DAT file, or does not have appropriate access information, then access is denied and a message is logged to OPCOM; the Data Analyzer receives a message stating that access to that node is not permitted.

Table 1–2 describes how the Data Provider node interprets a security triplet match.

Table 1–2 Security Triplet Verification

Security Triplet	Interpretation
08-00-2B-12-34-56\HOMETOWN\W	The Data Analyzer has write access to the node only when the Data Analyzer is run from the node with this hardware address (multi-adapter or DECnet/OSI system) and with the password HOMETOWN.
2.1\HOMETOWN\R	The Data Analyzer has read access to the node when run from a node with DECnet Phase IV address 2.1 and the password HOMETOWN.
*\HOMETOWN\R	Any Data Analyzer with the password HOMETOWN has read access to the node.

1.3.2 Customizing Security Files

Security files define which Data Analyzers can access data on nodes that have a Data Provider. The security files let you group nodes according to specific criteria.

Digital recommends that you group nodes according to VMScluster membership. A node can be in only one group at a time. Installing DECamds initially assigns all nodes to one group. Each node that is assigned to a group is listed under the group name heading in the System Overview window.

Consider the following items when you set up customized groups:

- VMSclusters and data integrity
 - For data in the disk volume and lock contention windows to be complete and accurate, all nodes in a VMScluster must be in the same group.
It is possible to include two clusters in one group, but if a cluster is divided between two groups or only partially included, the data might not be accurate.
 - Adding standalone nodes to the group does not affect the accuracy of the data, as long as the entire VMScluster is in the same group. For sites where disk volume and lock contention data are not critical, this might be acceptable.

- Partitioning for analysis

Specific users can have read or write access to certain subsets of nodes. For example, one Data Analyzer can be designated to monitor a certain hardware type or cluster. *This is entirely independent of the group to which the nodes of that hardware type or cluster are assigned.* Apart from strict security considerations, this mechanism is often used to partition systems for convenience.

Your site might already have criteria relevant to defining groups. These could include a system management division of labor, hardware type, physical location, or work function.

Overview of DECamds

1.3 Security Features

Digital recommends that you correlate your security files to your group definitions so that all nodes in the group are visible in the System Overview window. Section 1.3 explains how to set up security files.

1.3.2.1 Setting Up Node Groups

To assign a node to a group, perform the following steps on each Data Provider node that is to be part of the group:

1. Assign a unique name of up to 15 alphanumeric characters to the `AMDS$GROUP_NAME` logical name in the `AMDS$SYSTEM:AMDS$LOGICALS.COM` file. For example:

```
$ AMDS$DEF AMDS$GROUP_NAME FINANCE ! Group FINANCE; VMScluster alias
```

2. Apply the logical name by restarting the Data Provider, as follows:

```
$ @SYS$STARTUP:AMDS$STARTUP.COM START
```

For more information about the other logical names contained in `AMDS$LOGICALS.COM`, see Appendix B.

1.3.2.2 Defining Data Exchange Access Between Nodes

The Data Provider stores access security triplets in a file called `AMDS$DRIVER_ACCESS.DAT`, which indicates the Data Analyzer nodes that are allowed to request that data be provided. If a Data Analyzer node is not listed in the file, access is denied.

Examples

All Data Provider nodes in Group FINANCE have the following `AMDS$DRIVER_ACCESS.DAT` file:

```
*\FINGROUP\R ! Let anyone with FINGROUP password read
!
2.1\DEVGROUP\W ! Let only DECnet node 2.1 with
! DEVGROUP password perform fixes (writes)
!
2.2\FINGROUP\W ! Let DECnet node 2.2 perform fixes
```

All Data Provider nodes in Group DEVELOPMENT have the following `AMDS$DRIVER_ACCESS.DAT` file:

```
*\GROUPBRD\R ! Let anyone with GROUPBRD password read
!
2.1\DEVGROUP\W ! Let only DECnet node 2.1 with
! DEVGROUP password perform fixes
```

AMDS\$CONSOLE_ACCESS.DAT file for a Data Analyzer

For a Data Analyzer to access information on any node in Groups FINANCE or DEVELOPMENT, the following access security triplets must be listed in the Data Analyzer node's `AMDS$CONSOLE_ACCESS.DAT` file:

```
*\FINGROUP\R ! To access data on nodes in Group FINANCE
!
*\GROUPBRD\R ! To access data on nodes in Group DEVELOPMENT
!
*\DEVGROUP\W ! Assumes you are the owner of DECnet
! address 2.1 so you can access data and
! perform fixes on both Group FINANCE and
! Group DEVELOPMENT nodes.
!
*\FINGROUP\W ! Assumes you are the owner of DECnet
! address 2.2 so you can access data and
! perform fixes on Group FINANCE nodes.
```

After you modify the `AMDS$CONSOLE_ACCESS.DAT` security file, restart the Data Analyzer with the `AVAIL` command to use the changes. For more information about starting DECamsds, see Chapter 2.

1.3.2.3 Defining Read Access for Specific Users

You can restrict write access to certain users by performing the following steps:

1. Assign a search list of directories to the `AMDS$CONFIG` logical name in the `AMDS$SYSTEM:AMDS$LOGICALS.COM` file. For example:

```
$ DEFINE AMDS$CONFIG SYS$LOGIN,AMDS$SYSTEM
```

Execute the procedure as follows:

```
$ @AMDS$SYSTEM:AMDS$LOGICALS
```

2. Copy the `AMDS$CONSOLE_ACCESS.DAT` security file to the `SYS$LOGIN` directory of a user and edit the file for that user.
3. Restart the Data Analyzer with the `AVAIL` command. For more information about starting the Data Analyzer, see Chapter 2.

The next time the user starts DECamsds, the new security file will be found in their `SYS$LOGIN` directory and will be used. The security file found in `AMDS$SYSTEM` will not be read.

1.3.3 Sending Messages to OPCOM

The logical names shown in Table 1–3 control the sending of messages to OPCOM and are defined in the `AMDS$LOGICALS.COM` file.

Table 1–3 DECamsds Logical Names for OPCOM Messages

<code>AMDS\$RM_OPCOM_READ</code>	A value of TRUE logs read failures to OPCOM.
<code>AMDS\$RM_OPCOM_WRITE</code>	A value of TRUE logs write failures to OPCOM.

To use the changes, restart the Data Analyzer with the following command on each system or use `SYSMAN` to run the command on all systems within the `VMScluster`:

```
$ @SYS$STARTUP:AMDS$STARTUP RESTART
```

Overview of DECamds

1.3 Security Features

1.3.4 Setting Broadcast Intervals for Node Availability Messages

Availability messages are broadcast by the Data Provider on nodes at regular intervals until a node establishes a link with the Data Analyzer. After a link has been established, the interval varies depending on the amount of data collection (and other factors) occurring between nodes.

You can modify the logical names in the AMDS\$LOGICALS.COM file (shown in Table 1-4) to change the broadcast availability intervals.

Table 1-4 Broadcast Availability Logical Names

AMDS\$RM_DEFAULT_INTERVAL	Defines from 15- to 300-second intervals between availability message broadcasts.
AMDS\$RM_SECONDARY_INTERVAL	Defines from 15- to 1800-second intervals between availability message broadcasts after a link has been established between nodes.

To use the changes, restart the Data Analyzer with the following command on each system or by using SYSMAN to run the command on all systems within the VMScluster:

```
$ @SYS$STARTUP:AMDS$STARTUP RESTART
```

Getting Started

This chapter describes the following:

- How to start DECamds
- How to use the System Overview window to monitor resource availability problems on your system
- How to use the Event Log window to correct resource availability problems on your system

2.1 Starting DECamds

To start the DECamds Data Analyzer, enter the following command and any of the following qualifiers that you want:

AVAIL /qualifiers

Qualifiers

/CONFIGURE

Specifies the directories from which input files are read. This can be a search list of directories or a logical defining a search list of directories.

/LOG_DIRECTORY

Specifies the directory to which log files are written. Output files can be directed to the null device, NLA0:.

/GROUP

A comma-separated list of the groups of Data Provider nodes you want the Data Analyzer to access.

Note

If you have not already set up a group hierarchy of nodes during DECamds installation, refer to Section 1.3.2 for information about setting up node groups.

The following commands start DECamds with input files read first from SYS\$LOGIN, and then from AMDS\$SYSTEM (if the files are not found in SYS\$LOGIN). All output files are written to the SYS\$LOGIN directory. Only data from group KUDOS is collected.

```
$ DEFINE/JOB AMDS$CONFIG SYS$LOGIN,AMDS$SYSTEM
$ AVAIL/CONFIGURE=AMDS$CONFIG/LOG_DIRECTORY=SYS$LOGIN/GROUP=(KUDOS)
```

When DECamds starts, it displays the System Overview and Event Log windows.

To obtain help about DECamds, choose a menu item from the Help menu.

Getting Started

2.2 Using the System Overview Window

2.2 Using the System Overview Window

The System Overview window allows you to focus on resource usage activity at a high level and to display more specific data when necessary. The System Overview window displays CPU, memory, I/O data, number of processes in CPR queues, operating system version, and hardware model for each node and group it recognizes. Figure 2-1 shows a sample System Overview window, which displays the nodes that DECams can currently reach and monitor.

Figure 2-1 System Overview Window

Group (node cnt)	% Utilization	Rate / sec / CPU	# procs in	Q. S.	Hardware		
NodeName	CPU	MEM	BIO	DIO	CPU Qs	Version	Model
EVHS (29)	8	57	3	5	1		
ZEQYS	0	79	0	0	0	V6.2	DEC 3000 Model 400
GNATEK	2	70	0	0	0	dir V6.2	VAXstation 3100-M76/SPX
ALMOS	19	34	19	105	1	V6.2	DEC 7000 Model 630
ALMOSHA	34	30	2	0	0	V6.2	DEC 7000 Model 630
AEESUN	0	37	0	1	0	V6.2	DEC 4000 Model 620
BERNBY	4	50	0	0	0	V6.2	VAXstation 3100/SPX
CRIPAL	5	47	1	0	0	V6.2	VAX 6000-440
CHOBE	1	29	1	0	0	V6.2	DEC 7000 Model 630
CLAIR	32	71	29	0	0	V6.2	VAXstation 3100/SPX
CLAWS	0	40	2	0	0	V6.2	DEC 4000 Model 610
CRNPOP	2	71	4	0	0	V6.2	VAXstation 4000-VLC
DEODIL	3	72	5	0	0	V6.2	VAXstation 3100/GPX
WFOSHA	1	25	2	1	0	V6.2	DEC 7000 Model 630
FARKLE	1	69	0	0	0	V6.2	VAXstation 3100-M76/SPX
FEMOVE	10	69	1	0	0	V6.2	VAXstation 3100/GPX
GLOBBP	4	68	0	0	0	V6.2	VAXstation 3100/GPX
GRBS	0	49	0	0	0	V6.2	DEC 3000 Model 500
LOADQ	3	35	3	32	0	V6.2	VAX 7000-620
MACHU	3	71	0	1	0	V6.2	VAXstation 4000-VLC
MILADY	6	70	0	1	0	V6.2	VAXstation 3100/SPX
QENOT	11	55	13	1	0	V6.2	VAX 6000-440
PITMOD	4	64	0	0	0	V6.2	VAXstation 3100/SPX
RUMAD	1	88	0	3	0	V6.2	DEC 3000 Model 400
SUB4	2	69	0	0	0	V6.2	VAXstation 3100/GPX
TRAVO	1	28	9	3	0	V6.2	DEC 7000 Model 630
VAX5	6	72	13	0	0	V6.2	VAX 6000-540
VMSRMS	21	73	1	0	0	V6.2	VAXstation 3100/GPX
ZAFNOE	24	70	2	17	0	V6.2	VAX 6000-440
.....ROON.....	4	76	0	0	0	V6.2	VAXstation 3100/SPX

ZK-8543A-GE

The System Overview window contains two kinds of information:

- Group information, displayed in the row next to the Group name, shows averages for all nodes in the group.
- Node information, displayed in the row next to the node name, shows averages for the node.

If the View menu is set to Hide Nodes, node information is not displayed.

Table 2-1 explains the fields displayed in the System Overview window.

Getting Started

2.2 Using the System Overview Window

Table 2–1 System Overview Window Display Fields

Field	Description
Group	Displays the group names in alphabetical order and the number of nodes recognized by DECamds. A group is a defined set of nodes that appear together in the System Overview window. A group can be defined by type of hardware, physical location, function, or VMScluster alias.
NodeName	Displays the name of the node in a node row.
CPU (CPU usage)	In a group row, displays the average of the percentage of CPU time used by all processors weighted toward the present. In a node row, displays the percentage of CPU time used by all processes on the node, expressed as an exponential average, weighted toward the present. On Symmetric Multiprocessing (SMP) nodes, rates for CPU time are added and divided by the number of CPUs.
MEM (Memory rate)	In a group row, displays the average of the sampled values (over time) for all processes on all nodes in a group. In a node row, displays the percent of space in physical memory that all processes on the node are currently occupying. The value represents 100 percent minus the amount of free memory.
BIO (Buffered I/O rate)	In a group row, displays the average of BIO operations of all processes on all nodes. In a node row, displays the BIO rate for all processes on the node across the number of CPUs.
DIO (Direct I/O usage)	In a group row, displays the average of DIO operations of all processes on all nodes. In a node row, displays the DIO rate for all processes on the node.
# procs in CPU Qs (Number of processes in CPU queues)	Represents the number of processes the Node Summary data collection found in the COM, COMO, MWAIT, and PWAIT CPU queues.
O.S. Version (Version of the operating system)	Lists the currently loaded version of OpenVMS on the node being monitored (not the node doing the monitoring).
Hardware Model	Lists the hardware model of the node being monitored.

A percentage of a used resource is shown both by number and a dynamic status bar. For group rows, the values are averaged for all nodes in the group when Node Summary collection is active.

Resource availability problems are indicated by highlighting. When an event occurs, DECamds highlights the status bar that represents the resource. Highlighting is shown in red on color monitors, by default; it is bold on monochrome monitors. You can change the highlight color. (See Chapter 5 for more information.)


When data appears dimmed, the data is more than 60 seconds old due to a user action that stopped Node Summary data collection. When the data is updated, the display returns to normal resolution.

Figure 2–2 shows the System Overview window options.

Getting Started

2.2 Using the System Overview Window

Figure 2–2 System Overview Window Menus

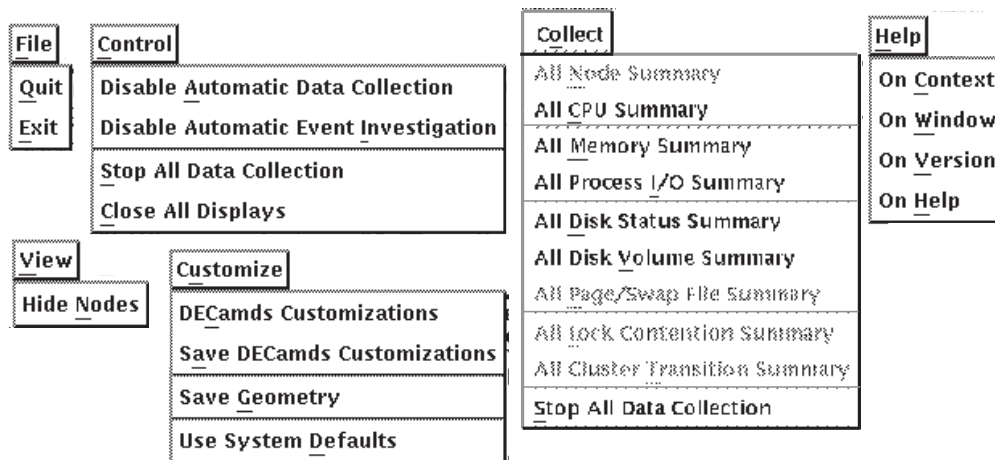

ZK-7968A-GE

2.2.1 Expanding and Collapsing Group Information

Use the View menu to display **group** or group and node status in the System Overview window. Typically a group is a VMScluster. Groups are displayed in alphabetical order. Nodes within a group are also displayed in alphabetical order.

You can also expand and collapse specific group displays by clicking MB3 while the cursor is on the selected group and choosing either the Hide Nodes or Show Nodes menu item.

2.2.2 Displaying Additional Data

By default, the Data Analyzer collects, analyzes, and displays four categories of data from the Data Provider nodes:

- Node Summary
- Page/Swap File Summary
- Lock Contention Summary
- Cluster Transition Summary

In addition to the default data, you can choose any of these categories of additional data to be collected, analyzed, and displayed:

- CPU Summary
- Memory Summary
- Process I/O Summary
- Disk Status Summary
- Disk Volume Summary

You can change the default data windows with the DECamds Application Customization dialog box. For more information about customizing DECamds, see Chapter 5.

Note

Data gathering and display consume CPU time and network bandwidth. Request only the data you need to conclude an investigation, and then stop collecting the data (see Section 2.2.3). Whenever possible, collect data for just a node, not the entire group.

To request a specific data category, do one of the following:

- In the Event Log window, click MB3 on a selected event and choose Display from the menu.
- For data on a single node or a group, in the System Overview window, click MB3 on a selected node or group, choose Collect from the menu, and choose a category from the submenu.
- For data on all nodes, in the System Overview window, choose a category from the Collect menu.

2.2.3 Stopping Data Collection

To stop collecting data, choose one of the following options:

- Stop All Data Collection from the Collect menu or Control menus of the System Overview or Event Log windows.

This stops collecting for all nodes. Events are removed from the Event Log, and data values in the System Overview window go to zero and are dimmed. Use this item if you lose track of data you are collecting in the background. Then restart data collection as needed; new events appear once data collection resumes.

- Stop All Data Collection from the Collect submenu of the MB3 menu for a group or node name in the System Overview window.

This stops all data collection for the group or node you select. Node or group data in the System Overview window is zeroed.

- Stop Collecting from the File menu of any data window.

If the data window is specific to a node or group, this option stops collecting for the node or group.

Note

Close Display in the File menu closes the window but continues data collection as a background task.

- Exit or Quit from the File menu.


2.3 Using the Event Log Window

The Event Log window (Figure 2–3) allows you to identify and correct a system problem. The Event Log window displays a warning message whenever DECamds detects a resource availability problem.

Getting Started

2.3 Using the Event Log Window

Figure 2-3 Event Log Window

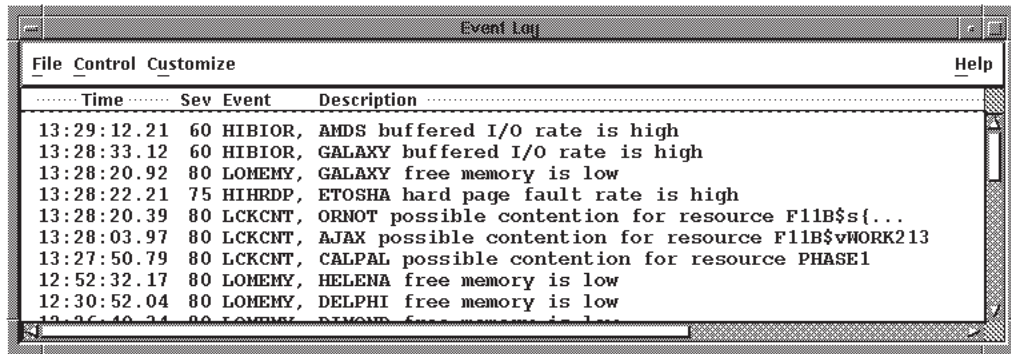

ZK-7951A-GE

Note

DECamds writes all events to a log file (AMDS\$LOG:AMDS\$EVENT_LOG.LOG). You can read this file in the Event Log window while the application is running.

Ignore event messages that report the system process "SWAPPER" as having used all its quotas. The SWAPPER process is the OpenVMS memory management process; it does not have its quotas defined in the same way other system and user processes do.

Table 2-2 explains the fields displayed in the Event Log window.

Table 2-2 Event Log Window Display Fields

Field	Description
Time	Displays an event, in real time, when it is detected.
Severity	Displays a value from 0 to 100. By default, events are listed in the Event Log window in order of decreasing severity. 0 is an informational message; 100 is a severe event. An event severity of 80 is high and indicates a potentially serious problem. Events with a severity of less than 50 appear dimmed, to indicate that they are less important. See Chapter 5 for information about how to change the severity. Events that are critical are also sent to the OpenVMS operator communication manager (OPCOM).
Event	Displays an alphanumeric identifier of the type of event.
Description	Displays the node or group name and a short description of the resource availability problem.

When an event "times out" by an improvement in availability, it is removed from the display. Events that are not triggered by a condition are timed out after 30 seconds (for example, the "CFGDON, *node* configuration done" event). When you select an event, the event remains displayed for 15 seconds (or until you initiate another task in the window), even if the event times out.

Figure 2-4 shows the Event Log window options.

Figure 2–4 Event Log Window Menus

File	Control	Customize	Help
Quit	Disable Automatic Data Collection	DECamds Customizations	On Context
Exit	Disable Automatic Event Investigation	Save DECamds Customizations	On Window
	Stop All Data Collection	Save Geometry	On Version
	Close All Displays	Use System Defaults	On Help
		Customize Events	
		Save Event Customizations	
		Sort Data...	
		Filter Data...	
		Use Last Saved Settings	
		Save Sort Changes	
		Save Filter Changes	

ZK-7952A-GE

To customize the Event Log window display, choose Filter Data... from the Customize menu. Table 2–3 describes the filter options.

Table 2–3 Event Log Filters

Filter	Description
Severity	Controls the severity level at which events are displayed in the Event Log menu. By default, all events are displayed.
Event Bell	Determines which events are marked by an audible signal by specifying a minimum event severity value. When a new event is displayed, if the severity value is the same or greater than the specified value, an audible notification is given. To disable the sound, specify a value of 101.
Bell Volume	The pitch or sound level at which the bell is rung when an event is signalled whose priority is greater than the Event Bell filter.
Event Highlight	Determines which events are marked by a visual signal by specifying a minimum event severity value. When a new event is displayed, if the severity value is the same or greater than the specified value, an event is highlighted. To disable highlighting, specify a value of 101.
Event Signal	Determines which events get displayed in the Event Log window by specifying a minimum event severity value. When a new event is received, if the severity value is the same or greater than the specified value, it is displayed; events with a severity level less than the specified value are ignored.
Event Timeout (secs)	Determines how long an informational event is displayed (in seconds).
Event Escalation Time (secs)	Determines how long an event must be signaled before it is sent to the operator communication manager (OPCOM). DECamds uses this value along with the Event Escalation Severity value. Both criteria must be met before the event is signaled to OPCOM.

(continued on next page)

Getting Started

2.3 Using the Event Log Window

Table 2-3 (Cont.) Event Log Filters


Filter	Description
Event Escalation Severity	Determines which events are sent to the operator communication manager (OPCOM). DECamds uses this value along with the Event Escalation Time (secs) value. Both criteria must be met before the event is signaled to OPCOM.

For more information about customizing event log information, see Section 5.1.

2.3.1 Displaying Information About an Event Log Entry

To display information, click MB3 on any event in the Event Log window, and then choose Display. Depending on the event, you have one or more event display choices that give you more information about the event. Figure 2-5 shows a sample event display choice dialog box.

Figure 2-5 Event Display Choice Dialog Box

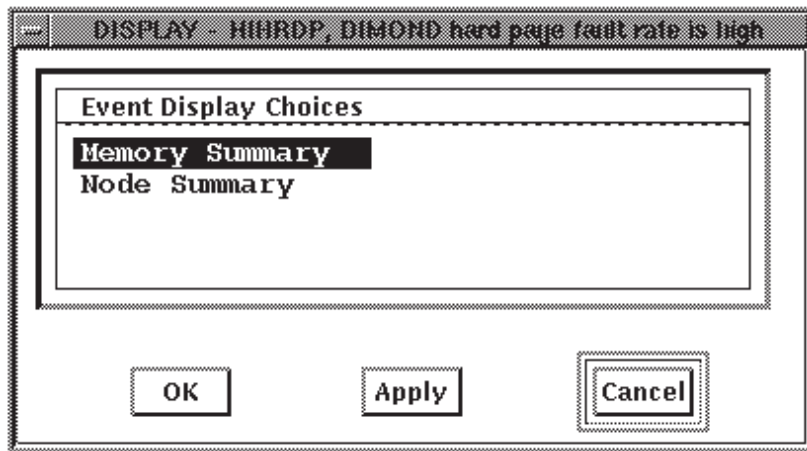

ZK-7950A-GE

2.3.2 Performing Corrective Action on an Event Log Entry

To take corrective action, click MB3 on any event in the Event Log window, and then choose Fix. Depending on the event, you have one or more of the following event fix choices. (Not all events have all fix options.)

- Adjust process working set
- Crash node
- Delete a process
- Exit an image
- Lower process priority
- Purge process working set
- Raise process priority
- Resume a process
- Suspend a process

See Chapter 4 for detailed information about performing fixes.

2.3.3 Sending Event Information to OPCOM

DECamds sends critical events to the operator communication manager (OPCOM) so that POLYCENTER products might be able to access the events.

By default, events that meet *both* of the following criteria are sent to OPCOM:

- Have a severity level of 90 or above
- Occur continuously for 600 seconds (10 minutes)

You can change either criterion by choosing Filter Data... from the Customize menu of the Event Log window. For more information on changing Event Log filters, see Chapter 5.

2.3.4 Removing an Event from the Event Log Window

To remove an event from the Event Log window, click MB3 on an event, and choose Remove from the menu. An event reappears if DECamds routine sampling detects the same situation that caused the original log entry.

2.3.5 Retaining and Releasing an Event in the Event Log Window

Event Log entries are removed when the underlying cause is removed, so an event might disappear from the Event Log window. To retain the selected event in the Event Log window, click MB3 on an event and choose Freeze. When an event is frozen, the Time field is highlighted.

To release the selected event, click MB3 on the event and choose Unfreeze.

Managing DECams Data Windows

This chapter describes the DECams data windows that you can display from the System Overview and Event Log windows. Table 3–1 shows the data windows and their functions.

Table 3–1 DECams Data Windows

Window	Reference	Opened from Window	Displays
CPU Modes Summary	Section 3.1	Node Summary	A graphic representation of each CPU's processor modes, listing the process currently executing in the CPU.
CPU Summary	Section 3.2	Event Log Node Summary System Overview	Statistics about CPU utilization by process, including process state, priority, execution rate, CPU time, and wait time.
Disk Status Summary	Section 3.3	Event Log System Overview	Disk device data including path, volume name, status, and mount, transaction, error, and resource wait counts.
Volume Summary	Section 3.4	Event Log System Overview	Disk volume data, including path, volume name, disk block utilization, queue length, and operation count rate.
Single Disk Summary	Section 3.5	Disk Status Summary Volume Summary	Summary data about each node in the group in which a disk is available.
Lock Contention Summary	Section 3.6	Event Log System Overview	Data about each resource for which a potential lock contention situation exists.
Memory Summary	Section 3.7	Event Log Node Summary System Overview	Statistics about memory usage by process, including process working set count, quota and extent, and paging rates.
Node Summary	Section 3.8	Event Log System Overview	Overview of a specific node's resource demand on the CPU state queues and processor modes, memory utilization, page faults, and I/O.
Page/Swap File Summary	Section 3.9	Event Log System Overview	Data about page and swap names and utilization, including free, used, and reserved pages.
Process I/O Summary	Section 3.10	Event Log Node Summary System Overview Single Disk Summary	Statistics about I/O utilization by process, including Buffered I/O, Direct I/O, Page Write I/O, and also lists various I/O quotas.
Single Lock Summary	Section 3.11	Lock Contention Summary Window Event Log	Specific data about the blocking lock and any other locks in the granted, conversion, or waiting queues.

(continued on next page)


Managing DECamds Data Windows

Table 3–1 (Cont.) DECamds Data Windows

Window	Reference	Opened from Window	Displays
Single Process Summary	Section 3.12	Any data window	Specific data about a process, basically a combination of data elements from the CPU, Memory, and Process I/O displays, as well as data for specific quota utilization, current image, specific process information, and wait queue time.
Cluster Transition /Overview Summary	Section 3.13	Event Log System Overview	Summary information about each node's membership in a VMScluster.
System Communication Architecture Summary	Section 3.14	Cluster Transition /Overview Summary	System Communication Architecture (SCA) information about a selected node's connection or connections to other nodes in a cluster.
NISCA Summary	Section 3.15	System Communication Architecture Summary	Summary information about the Network Interconnect System Communication Architecture (NISCA) protocol, which is responsible for carrying messages to other nodes in the cluster.

Figure 3–1 shows the hierarchy of the DECamds data windows.

Figure 3–1 DECamds Data Window Hierarchy

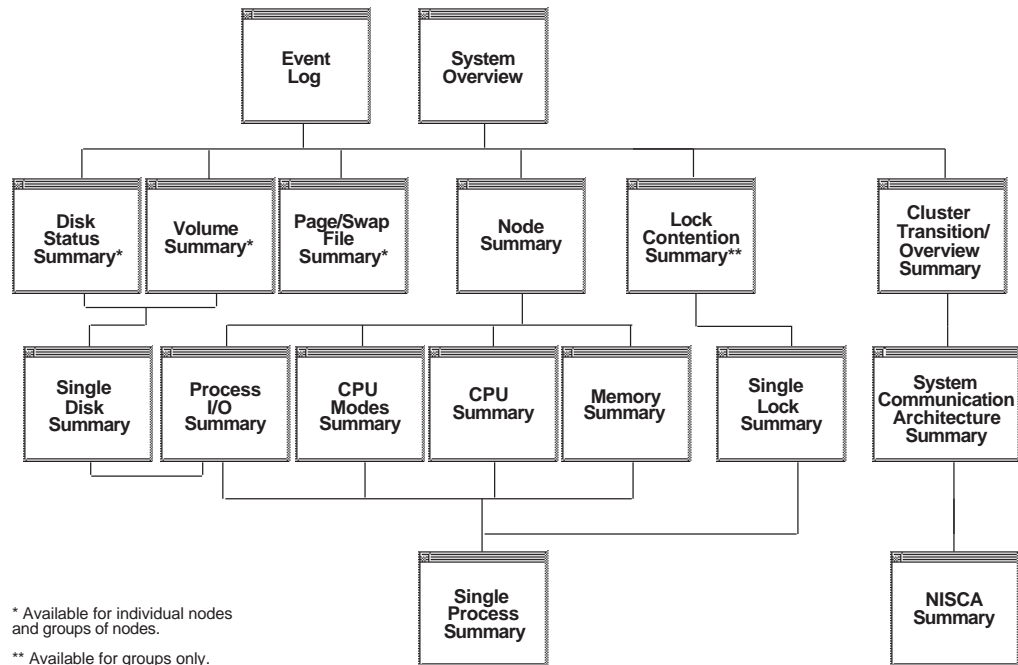

ZK-7970A-GE

3.1 CPU Modes Summary Window

The CPU Modes Summary window shown in Figure 3–2 displays more detailed summary statistics about CPU mode usage than the Node Summary window. Use the CPU Modes Summary window to diagnose issues that may be caused by CPU-intensive users or CPU bottlenecks.

Figure 3–2 CPU Modes Summary Window

CPU Id	State	Capabilities	Mode	% Used	PID Rate	Name Peak
CPU #01	Run					*** None ***
	PRIMARY		Kernel		0%	13%
	RUN		Executive		0%	3%
	QUORUM		Supervisor		0%	0%
			User		0%	36%
			Interrupt		4%	13%
			Compatibility		0%	0%
			MP Synch		0%	0%
			Null		95%	54%
CPU #03	Run					*** None ***
			Kernel		7%	26%
	RUN		Executive		4%	7%
	QUORUM		Supervisor		0%	9%
			User		14%	60%
			Interrupt		1%	3%
			Compatibility		0%	0%
			MP Synch		0%	2%
			Null		74%	34%
CPU #04	Run				2EA031EB	APAS1_CALENDAR
			Kernel		8%	42%
	RUN		Executive		7%	8%
	QUORUM		Supervisor		0%	10%
			User		24%	63%
			Interrupt		1%	1%

ZK-7940A-GE

To open a CPU Modes Summary window, do one of the following:

- In the Node Summary window, double-click MB1 in the CPU Modes area. You can also click MB3, and choose Display from the menu.
- In the Node Summary window View menu, choose Display Modes Summary.

You can open a window about a specific process in the CPU Modes Summary window by double-clicking on the process name.

Table 3–2 describes the CPU Modes Summary window data fields.

Managing DECams Data Windows

3.1 CPU Modes Summary Window

Table 3–2 CPU Modes Summary Window Data Fields

Field	Displays
CPU ID	A decimal value representing the identity of a process in a multiprocessing system. On a uniprocessor, this value will always be CPU #00.
Capabilities	One of the the following CPU capabilities: Primary, Quorum, Run, or Vector.
State	One of the following CPU states: Boot, Booted, Init, Rejected, Reserved, Run, Stopped, Stopping, or Timeout.
Mode	One of the following values for CPU modes supported for the architecture: Compatibility, Executive, Interrupt, Kernel, MP Synch, Null, Supervisor, or User. Note: Compatibility mode does not exist on OpenVMS Alpha systems.
% Used	A bar graph, by CPU, representing the percentage of the CPU utilization for each mode.
PID	The process identifier value of the process that is using the CPU. If the PID is unknown to the console application, the IPID will be listed.
Name	The process name of the process found in the CPU. If no process is found in the CPU, this will be listed as *** None ***.
Rate	A numerical percentage of CPU time for each mode.
Peak	The peak CPU usage determined for each mode.

3.2 CPU Summary Window

The CPU Summary window shown in Figure 3–3 displays summary statistics about process CPU usage issues that might be caused by CPU-intensive users or CPU bottlenecks.

Figure 3–3 CPU Summary Window

The screenshot shows a window titled "VAX CPU Summary" with a menu bar containing "File", "View", "Fix", "Customize", and "Help". The main content is a table with the following columns: PID, Process Name, Priority, State, Rate, CPU Wait, and Time. The table lists four processes with their respective statistics.

PID	Process Name	Priority	State	Rate	CPU Wait	Time
41C029F6	BATCH_54B	3/ 3	LEP	25.63%	0.00%	0 00:09:32.39
41C02C6C	SYSEBK_286B	6/ 6	LEP	23.77%	0.00%	0 00:01:11.60
41C02C55	SYSEBK_28DA	6/ 6	LEP	9.71%	0.00%	0 00:05:47.91
41C0286B	SYSEBK_2185_3	7/ 6	LEP	5.01%	0.00%	0 00:00:14.08

ZK-7942A-GE

To open a CPU Summary window, do one of the following:

- In the System Overview window, double-click on the CPU field of any node. You can also click MB3 on an event that is related to CPU usage, choose Display from the menu, and choose CPU Summary from the list.
- In the Node Summary window, double-click on CPU Process State Queues.

- In the Event Log window, click MB3 on an event that is related to CPU usage, choose Display from the menu, and choose CPU Summary from the list.

You can open a window about a specific process in the CPU Summary window by double-clicking on the process name.

Table 3–3 describes the CPU Summary window data fields.

Table 3–3 CPU Summary Window Data Fields

Field	Displays
PID	The Process Identifier, a 32-bit value that uniquely identifies a process.
Name	The process name.
Priority	Computable (<i>xx</i>) and base (<i>yy</i>) process priority in the format <i>xx/yy</i> .
State	One of the values listed under the Single Process Summary description in Section 3.12.
Rate	The percent of CPU time used by this process. This is the ratio of CPU time to elapsed time. The CPU rate is also displayed in the bar graph.
Wait	The percent of time process is in the COM or COMO state.
Time	The amount of actual CPU time charged to the process.

DECamds detects the following CPU-related events and displays them in the Event Log window. *Node* is replaced by the name of the node to which the event is related. *Process* is replaced by the name of the process to which the event is related.

- PRCCOM, *Node Process* waiting in COM or COMO
- PRCCVR, *Node Process* has high CPU rate
- PRCMWT, *Node Process* waiting in MWAIT
- PRCPWT, *Node Process* waiting in COLPG, PFW, or FPG

3.3 Disk Status Summary Window

The Disk Status Summary window shown in Figure 3–4 displays data about availability, count, and errors of disk devices on the system.

Managing DECams Data Windows

3.3 Disk Status Summary Window

Figure 3–4 Disk Status Summary Window

The screenshot shows a window titled "AMDS Disk Status Summary" with a menu bar containing "File", "View", "F13", "Customize", and "Help". The main content is a table with the following data:

Device Name	Path	Volume Name	Status	Count			
				Error	Trans	Mount	Rwait
DAD18	AMDS V50121		Mounted wtlck	0	1	1	0
DAD19	AMDS DECLEARN010		Mounted wtlck	0	1	1	0
DAD20	AMDS OPTMOD		Mounted wtlck	0	1	1	0
DAD15	AMDS VAKDOCJUL942		Mounted wtlck	0	1	1	0
DAD16	AMDS VAKDOCJUL943		Mounted wtlck	0	1	1	0
DAD17	AMDS VAKDOCJUL944		Mounted wtlck	0	1	1	0
DAD22	AMDS V4RESD		Mounted wtlck	0	1	1	0
DAD26	AMDS V46_RESD		Mounted wtlck	0	1	1	0
DAD27	AMDS V47RES		Mounted wtlck	0	1	1	0
DAD28	AMDS ESS_KITSDISK		Mounted wtlck	0	1	1	0
DAD23	AMDS V43_RESD		Mounted wtlck	0	1	1	0
DAD24	AMDS V44RES		Mounted wtlck	0	1	1	0
DAD25	AMDS V45RES		Mounted wtlck	0	1	1	0
DAD3	AMDS VAKBINJUL942		Mounted wtlck	0	1	1	0

ZK-7947A-GE

To open a Disk Status Summary window, do one of the following:

- In the System Overview window, click MB3 on a node or group line, choose Display from the menu, and choose Disk Status Summary from the submenu.
- In the Event Log window, click MB3 on any Disk Status-related event, and choose Display from the menu.

Table 3–4 describes the Disk Status Summary window data fields.

Table 3–4 Disk Status Summary Window Data Fields

Field	Displays
Device Name	The standard OpenVMS device name that indicates where the device is located, as well as a controller or unit designation.
Path	The primary path (node) from which the device receives commands.
Volume Name	The name of the media that is currently mounted.

(continued on next page)

Managing DECamds Data Windows

3.3 Disk Status Summary Window

Table 3–4 (Cont.) Disk Status Summary Window Data Fields

Field	Displays
Status	One or more of the following disk status values: <i>Alloc</i> Disk is allocated to a specific user <i>Clustran</i> Disk status is uncertain due to a cluster state transition in progress <i>Dismount</i> Disk in process of dismounting; may be waiting for a file to close <i>Foreign</i> Disk is mounted with the /FOREIGN qualifier <i>Invalid</i> Disk is in an invalid state (likely Mount Verify Timeout) <i>Mount Verify</i> Disk is waiting for a mount verification <i>Mounted</i> Disk is logically mounted by a MOUNT command or service call <i>Offline</i> Disk is no longer physically mounted in device drive <i>Online</i> Disk is physically mounted in device drive <i>Shadow Set Member</i> Disk is a member of a shadow set <i>Unavailable</i> Disk is set /UNAVAILABLE <i>Wrong Volume</i> Disk has been mounted with the wrong volume name <i>Wrtlck</i> Disk is mounted and write locked
Errors ¹	The number of errors generated by the disk, (a quick indicator of device problems).
Trans ¹	The number of currently-in-progress file system operations for the disk.
Mount ¹	The number of nodes that have the specified disk mounted.
Rwait ¹	An indicator that a system I/O operation is stalled, usually during normal connection failure recovery or volume processing of host-based shadowing.

¹For the group window, the sum of the node window values is displayed.

DECamds detects the following disk status-related events and displays them in the Event Log window. *Node* refers to the name of the node that is signalling the event. *Disk* refers to the name of the disk to which the event is related.

DSKERR, *Node Disk* disk error count is high
 DSKINV, *Node Disk* disk is in an invalid state
 DSKMNV, *Node Disk* disk mount verify in progress
 DSKOFF, *Node Disk* disk is off line
 DSKRWT, *Node Disk* disk Rwait count is high
 DSKUNA, *Node Disk* disk is unavailable
 DSKWRV, *Node Disk* wrong volume mounted

Managing DECamds Data Windows

3.4 Volume Summary Window

3.4 Volume Summary Window

The Volume Summary window shown in Figure 3–5 displays summary data about disk volumes mounted in the system. Volume summary data is accurate when every node in a VMSccluster environment is in the same group. Multiple VMScclusters can share a group, but VMScclusters cannot be divided into different groups without losing accuracy.

Figure 3–5 Volume Summary Window

Device Name	Path	Volume Name	Disk Space (blocks)		Free	Queue	OpRate
			Used	% Used			
DSA4010	EVMS	WORK9	3815570	[Progress Bar]	104380	1.26	45.14
DSA4006	EVMS	WORK5	3920478	[Progress Bar]	12	1.00	27.14
DSA67	EVMS	FOLKLORE	2252727	[Progress Bar]	688218	0.00	7.66
\$64\$DUA113	CALPAL	SCRATCH.1	2890557	[Progress Bar]	50394	0.89	6.35
\$64\$DUA178	MI CLIT	EVMS_SYS_061	3850054	[Progress Bar]	70404	0.00	5.16
DSA4005	EVMS	WORK4	3020402	[Progress Bar]	900088	0.00	4.90
DSA64	EVMS	VMSCMASTER	3097410	[Progress Bar]	823080	0.00	4.38
\$64\$DUA203	LOADQ	AXPVMS061	3917270	[Progress Bar]	3220	0.00	3.37
\$64\$DUA114	CALPAL	SCRATCH.2	2881599	[Progress Bar]	59352	0.00	2.02
DSA4009	EVMS	WORK6	3207386	[Progress Bar]	713104	0.00	0.83
DSA4004	EVMS	WORK3	3449114	[Progress Bar]	471344	0.00	0.29
DSA4007	EVMS	WORK7	2924410	[Progress Bar]	996080	0.00	0.17
DSA4008	EVMS	WORK8	3441786	[Progress Bar]	478540	0.00	0.08

ZK-7948A-GE

Note

The group value for Free blocks used is determined from the node with the mastering lock on the volume resource.

To open a Volume Summary window, do one of the following:

- In the System Overview window, click MB3 on a node or group line, and choose Display from the menu and Volume Summary from the submenu.
- In the Event Log window, click MB3 on any volume-related event, and choose Display from the menu.

Note

DECamds does not collect Volume Summary data on remote disks mounted using the VAX Distributed File Service (DFS).

Table 3–5 describes the Volume Summary window data fields.

Table 3–5 Volume Summary Window Data Fields

Field	Displays
Device Name	The standard OpenVMS device name that indicates where the device is located, as well as a controller or unit designation.
Path	The primary path (node) from which the device receives commands.
Volume Name	The name of the mounted media.
Used	The number of volume blocks in use.
% Used	The percentage of the number of volume blocks in use in relation to the total volume blocks available.
Free	The number of blocks of volume space available for new data.
Queue	The average number of I/O operations pending for the volume (an indicator of performance; less than one is optimal).
OpRate	The rate at which the Operations Count to the volume has changed since the last sampling, and measures the amount of activity on a volume; the optimal load is device specific.

DECamds detects the following volume-related events and displays them in the Event Log window. *Node* refers to the name of the node that is signalling the event. *Disk* refers to the name of the disk to which the event is related. *Group* refers to the name of the group to which the event is related.

DSKQLN, *Node Disk* disk volume queue length is high
 LOVLSP, *Group Disk* disk volume free space is low

3.5 Single Disk Summary Window

The Single Disk Summary window shown in Figure 3–6 displays summary data about each node in the group in which a disk is available. This window is a node-by-node display of the data that is summarized in the Disk Status Summary and Volume Summary windows. The values displayed are those you would see if you displayed Disk Status Summary or Volume Summary for each node within the group.

You can use this display to determine both of the following:

- Which node in the group has a disk with high I/O rates
 Determining which node has a high I/O rate to the disk is useful because you can sort by Direct I/O rate and learn which process or processes are causing the high I/O rates to the disk.
- If a disk is in a state that is inconsistent with other nodes
 Determining which node or nodes might be in an abnormal state is useful because you can then discover if, for some reason, one node believes that the disk is in the *MntVerify* or *CluTran* state, thus holding up processing in the cluster in which the node resides.

Managing DECamds Data Windows

3.5 Single Disk Summary Window

Figure 3–6 Single Disk Summary Window

Node	Status	Errors	Trans	Rwait	Free	QLen	OpRate
ARUNEA	Mounted	0	1	0	909	0.00	0.00
ZBOYS	Mounted	0	1	0	0	0.00	0.00
CHOBE	Mounted	0	1	0	909	0.00	0.00
VMSNS	Mounted	0	1	0	909	0.00	0.00
CLAWS	Mounted	0	1	0	0	0.00	0.00
RUMAD	Mounted	0	1	0	909	0.00	0.00
ZAPNOT	Mounted	0	1	0	909 (M)	0.00	0.00
BABNEY	Mounted	0	1	0	909	0.00	0.00
MILADY	Mounted	0	1	0	909	0.00	0.00
MACHU	Mounted	0	1	0	909	0.00	0.00
LOADQ	unknown	0	0	0	0	0.00	0.00
DFODIL	Mounted	0	1	0	909	0.00	0.00
FAKLE	Mounted	0	1	0	909	0.00	0.00
ZOON	Mounted	0	1	0	909	0.00	0.00
ALROS	Mounted	0	1	0	909	0.00	0.00
CRNPOF	Mounted	0	1	0	909	0.00	0.00
GLOBE	Mounted	0	1	0	909	0.00	0.00
GNBS	Mounted	0	1	0	909	0.00	0.00

ZK-8544A-GE

To open a Single Disk Summary window, follow these steps:

1. In the System Overview window, click MB3 on a group or node name.
The system displays a pop-up menu.
2. Choose Display from the menu and Disk Status Summary (or Volume Summary) from the submenu.
The system displays the Disk Status Summary window (or Volume Summary window).
3. In the Disk Status Summary window (or Volume Summary window), click MB3 on a device name.
The system displays a pop-up menu.
4. Choose Display Disk.
The system displays the Single Disk Summary window.

As an alternative to steps 3 and 4, you can double-click MB1 on a line in the Disk Status Summary or Volume Summary window to display the Single Disk Summary window.

Table 3–6 lists the Single Disk Summary window data fields.

Table 3–6 Data Items in the Single Disk Summary Window

Data Item	Description
Node	Name of the node
Status	Status of the disk: mounted, online, offline, and so on
Errors	Number of errors on the disk
Trans	Number of currently-in-progress file system operations on the disk (number of open files on the volume)
Rwait	Indication of an I/O stalled on the disk
Free	Count of free disk blocks on the volume An (M) after the free block count indicates this node holds the lock on the volume that DECamds uses to obtain the true free block count on the volume. Other nodes might not have accessed the disk, so their free block count might not be up to date.
QLen	Average number of operations in the I/O queue for the volume
OpRate	Count of rate of change to operations on the volume

Note: When you click on an item, DECamds temporarily stops updating the window for 15 seconds or until you choose an item from a menu.

In the Single Disk Summary window, you can display the Process I/O Summary window. To do so, follow these steps:

1. Click MB3 anywhere on a node line.
The system displays a pop-up menu.
2. Choose Display Process I/O Summary.
The system displays the Process I/O Summary window.

Alternatively, to display the Process I/O Summary window, you can do either of the following:

- Double-click MB1 on a node line.
- Click MB1 on a node line and then select Display Process I/O on the View pulldown menu.

3.6 Lock Contention Summary Window

The Lock Contention Summary window shown in Figure 3–7 is used to determine which resources are under contention. It displays all the OpenVMS Lock Manager resources that have potential lock contention situations. The Lock Contention Summary window is available only for groups; attempting to open a Lock Contention Summary for a node opens the node's group window.

Managing DECamds Data Windows

3.6 Lock Contention Summary Window

Figure 3–7 Lock Contention Summary Window

Resource Name	Master Node	Parent Resource	Duration	Status
DECW\$SERVER_2680009D_0066_0	LCKPAG		0 00:09:10	VALID
DECW\$SERVER_268000A7_0069_0	LCKPAG		0 00:09:10	VALID
DECW\$CLIENT_268000A6_0071_0	LCKPAG		0 00:09:10	VALID
DECW\$CLIENT_268000A7_0069_0	LCKPAG		0 00:09:10	VALID
DECW\$CLIENT_2680009B_003A_0	LCKPAG		0 00:09:10	VALID
DECW\$CLIENT_2680009E_0067_0	LCKPAG		0 00:09:10	VALID
DECW\$CLIENT_2680009B_003C_0	LCKPAG		0 00:09:10	VALID

ZK-7956A-GE

Locks are written to AMDS\$LOCK_LOG.LOG; see Section B.3 for more information. To interpret the information displayed in the Lock Contention Summary window, you should have an understanding of OpenVMS lock management services. For more information, see the *OpenVMS System Services Reference Manual*.

Note

Lock contention data is accurate only if every node in a VMScluster environment is in the same group. Multiple clusters can share a group, but VMSclusters cannot be divided into different groups without losing accuracy.

You can open a Lock Contention Summary window from the Event Log or System Overview windows, as follows:

- In the Event Log window, click MB3 on any lock contention-related event and choose Display from the menu.
- In the System Overview window:
 1. Click MB3 on any node or group line, and choose Display from the menu.
 2. Choose Lock Contention Summary from the submenu.

Table 3–7 describes the Lock Contention Summary window data fields.

Table 3–7 Lock Contention Summary Window Data Fields

Field	Displays
Resource Name	The resource name associated with the \$ENQ routine call.
Master Node	The node on which the resource is mastered.
Parent Resource	The name of the parent resource. If no name is displayed, the resource listed is the parent resource.
Duration	The amount of time elapsed since DECamds first detected the contention situation.

(continued on next page)

Managing DECamds Data Windows

3.6 Lock Contention Summary Window

Table 3–7 (Cont.) Lock Contention Summary Window Data Fields


Field	Displays
Status	The status of the lock. See the \$ENQ(W) description in the <i>OpenVMS System Services Reference Manual</i> .

You can open a Single Lock Summary window from the Lock Contention Summary window. See Section 3.11 for more information.

Figure 3–8 shows how you can determine which filters can or cannot be displayed. To filter specific locks from the display, choose Filter Data... from the Customize menu on the Lock Contention Summary window. A filter dialog box appears with a list of locks currently being filtered from the display. You can add a filter by typing the name of a filter in the Input Lock Name to Filter field and clicking on the Add button. You can use the asterisk (*) wildcard character to specify a range of filters. For example, \$DSA*\$SWAITER will filter all locks beginning with \$DSA and ending with \$SWAITER and anything in between.

You can also click on an existing lock in the Lock Contention Summary window and it will be placed in the Input Lock Name to Filter field (as shown in Figure 3–8). You must click on the Add button to add the filter.

Figure 3–8 Filtering Lock Events

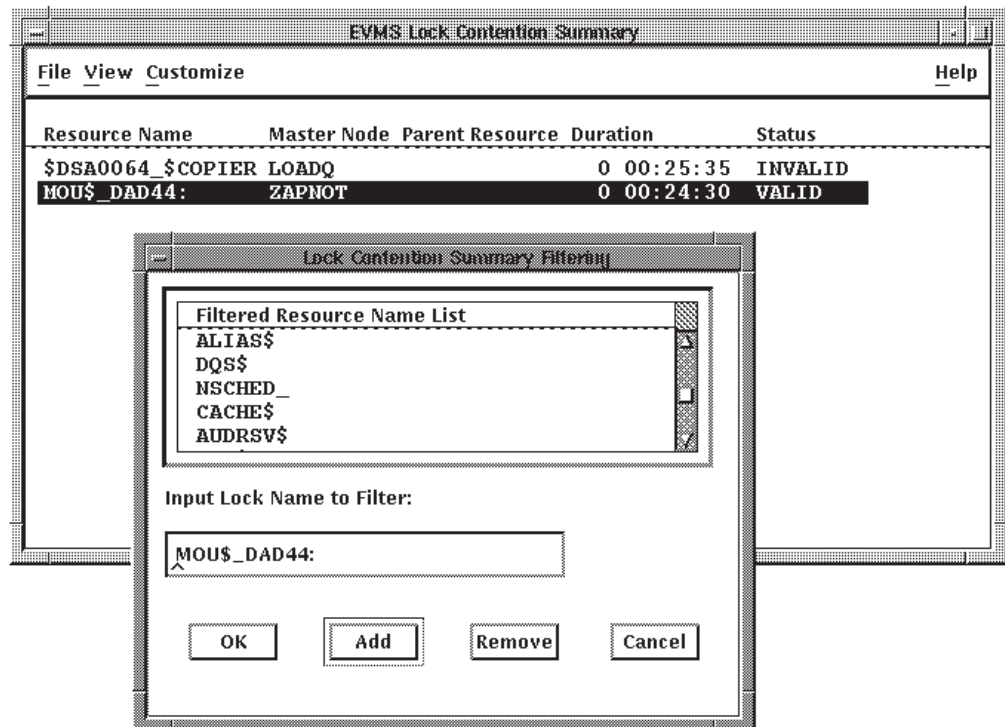

ZK-7957A-GE

You can remove a lock from the filter list by selecting a lock and clicking on the Remove button. Any lock contentions affected by the removed filter will be displayed.

Managing DECamds Data Windows

3.6 Lock Contention Summary Window

DECamds detects the following lock contention-related events and displays them in the Event Log window. Italicized words are replaced with actual values.

LCKCNT, *node* possible contention for resource *resource*
 LRGHSH, *node* lock hash table too large *n* entries
 RESDNS, *node resource* hash table dense *percentage* full *n* resources, hash table size *n*
 RESPRS, *node resource* hash table sparse, only *percentage* full *n* resources, table size *n*

3.7 Memory Summary Window

The Memory Summary window shown in Figure 3–9 displays memory usage data for processes on a node so that you can identify processes that use large amounts of memory or have high page fault rates.

Figure 3–9 Memory Summary Window

The screenshot shows a window titled "AMDS Memory Summary" with a menu bar containing "File", "View", "Fix", "Customize", and "Help". The main area contains a table with the following data:

PID	Process Name	Count	Working Set		Page Fault Rate	I/O
			Size	Extent		
000001D5	_FTA24:	390	512	32768	0.00	0.00
000001CE	VUE\$SYSTEM_4	337	512	32768	0.00	0.00
000001CD	VUE\$SYSTEM_3	271	512	32768	0.00	0.00
000001C5	DECW\$NTH	1290	5762	32768	0.00	0.00
000001C2	DECW\$SESSION	490	6512	32768	0.00	0.00
000001AB	DECW\$SERVER_0	4423	5581	32768	0.00	0.00
00000091	DECW\$TE_0091	2768	3264	32768	0.02	0.00
00000065	LATACP	395	680	2048	0.00	0.00
0000004F	NETACP	249	500	2048	0.00	0.00
0000004A	QUEUE_MANAGER	500	2048	32768	0.00	0.00

ZK-7960A-GE

To open a Memory Summary window, do one of the following:

- In the Node Summary window, double-click on the Page Faults or Memory area. You can also click MB3 on the Page Faults or Memory area, and choose Display from the menu.
- In the View menu of the Node Summary window, choose Display Memory Summary.
- In the System Overview window, double-click on the Memory field for any node. You can also click MB3 on any field for any node, choose Display from the pop-up menu, and choose Memory Summary from the submenu.
- To display a memory summary of every node in a group from the System Overview window, click MB3 on the group line, choose Display from the menu, and choose Memory Summary from the submenu.
- In the Event Log window, click MB3 on an event related to memory usage, and choose Display from the menu.

Managing DECamds Data Windows

3.7 Memory Summary Window

You can open a window about a specific process in the Memory Summary window by double-clicking on the process name.

Table 3–8 describes the Memory Summary window data fields.

Table 3–8 Memory Summary Window Data Fields

Field	Displays
PID	The process identifier, a 32-bit value that uniquely identifies a process.
Process Name	The process name.
Working Set Count ¹	The number of physical pages or pagelets of memory that the process is using. The bar graph represents the percentage of working set count used to the working set extent.
Working Set Size ¹	The number of pages or pagelets of memory the process is allowed to use. This value is periodically adjusted by the operating system based on analysis of page faults relative to CPU time used. When the value increases in large units, this indicates a process is receiving a lot of page faults and its memory allocation is increasing.
Working Set Extent ¹	The number of pages or pagelets of memory in the process's WSEXTENT quota as defined in the User Authorization File (UAF). The number of pages or pagelets will not exceed the value of the system parameter WSMAX.
Page Fault Rate	The number of page faults per second for the process. The bar graph represents a relative number of page faults per second.
Page Fault I/O Rate	The rate of READ attempts necessary to satisfy page faults (also known as Page Read I/O or the Hard Fault Rate).

¹Working Set Value = Total Physical Memory / Maximum Process Count

DECamds detects the following memory-related events and displays them in the Event Log window. *Node process* is replaced by the name of the process to which the event is related.

LOWEXT, *node process* working set extent is too small
LOWSQU, *node process* working set quota is too small
PRPGFL, *node process* high page fault rate
PRPIOR, *node process* paging I/O rate is high


3.8 Node Summary Window

The Node Summary window shown in Figure 3–10 displays a high-level graphic summary of node resource demands on the CPU, Memory, and I/O.

Managing DECams Data Windows

3.8 Node Summary Window

Figure 3-10 Node Summary Window

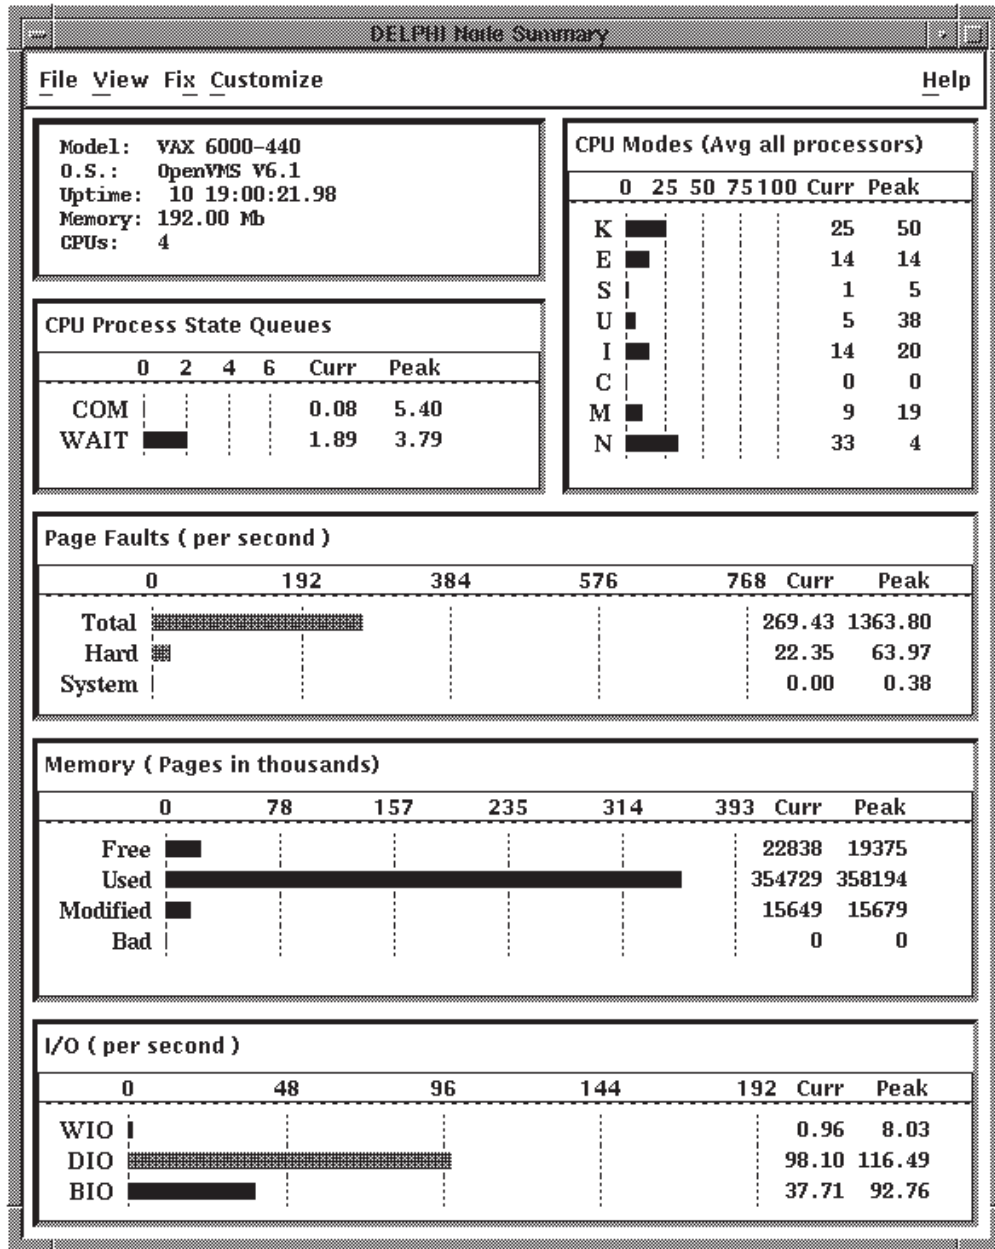

ZK-7963A-GE

To open a Node Summary window, do one of the following:

- In the System Overview window, double-click on any node name. You can also click MB3 on any node name, and choose Display from the menu.
- In the Event Log window, double-click on any node name. You can also click MB3 on an event that is related to node summary data, and choose Display from the menu.

Dynamic bar graphs display the current values for each field. Peak values are also displayed from when DECams begins collecting node summary data. A peak value is typically the highest value received; however, for the Free Memory field it is the lowest value seen.

Managing DECamds Data Windows

3.8 Node Summary Window

You can open the following windows from the Node Summary Window by double-clicking in the space for each category:

- CPU Summary
- CPU Modes Summary
- Memory Summary
- Process I/O summary

Table 3–9 describes the Node Summary window data fields.

Table 3–9 Node Summary Window Data Fields

Field	Displays
Hardware Model	The system hardware model name.
Operating System	The name and version of the operating system.
Total Memory	The total amount of physical memory found on the system.
Uptime	The time since last reboot measured in days, hours, minutes, and seconds.
Active	The number of active CPUs on the node.
CPU Process State Queues	One of the following: <i>COM</i> Sum of the queue lengths of processes in the COM and COMO states. <i>WAIT</i> Sum of the queue lengths of processes in the MWAIT, COLPG, CEF, PFW, and FPG states.
CPU Modes	The CPU usage by mode (kernel, executive, supervisor, user, interrupt, compatibility, multiprocessor synchronization, and null). On Symmetric Multiprocessing (SMP) nodes, percentages are averaged across all the CPUs and displayed as one value.
Page Faults	The rate of system hard and soft page faulting, as well as peak values seen during a DECamds session. System page faults are those taken from kernel processes.
Memory	The histogram listing memory distribution (Free, In Use, Modified, Bad) as absolute values of number of thousands of pages or pagelets. Peak values are also listed, with Free using lowest seen value as peak.
I/O	The histogram listing Buffer, Direct, and Page Write I/O rates per second. Also included is the peak value seen.

DECamds detects the following node events and displays them in the Event Log window. *Node* is replaced by the name of the node to which the event is related.

- HIBIOR, *node* buffered I/O rate is high
- HICOMQ, *node* many processes waiting for CPU
- HIDIOR, *node* direct I/O rate is high
- HIHRDP, *node* hard page fault rate is high
- HIMWTQ, *node* process waiting in MWAIT
- HINTER, *node* interrupt mode time is high
- HIPWIO, *node* paging write I/O rate is high
- HIPWTQ, *node* many processes waiting in COLPG, PFW, or FPG
- HITTLF, *node* total page fault rate is high
- HMPSYN, *node* MP synchronization mode time is high
- HISYSP, *node* system page fault rate is high
- LOMEMY, *node* free memory is low
- NOPROC, *node* cannot find process names *process*


Managing DECamds Data Windows

3.9 Page/Swap File Summary Window

3.9 Page/Swap File Summary Window

The Page/Swap File Summary window shown in Figure 3–11 displays data about a node's page/swap file usage and is used to identify page or swap files that are overused or underconfigured. It is also used to find nodes that lack a page or swap file.

Figure 3–11 Page/Swap File Summary Window

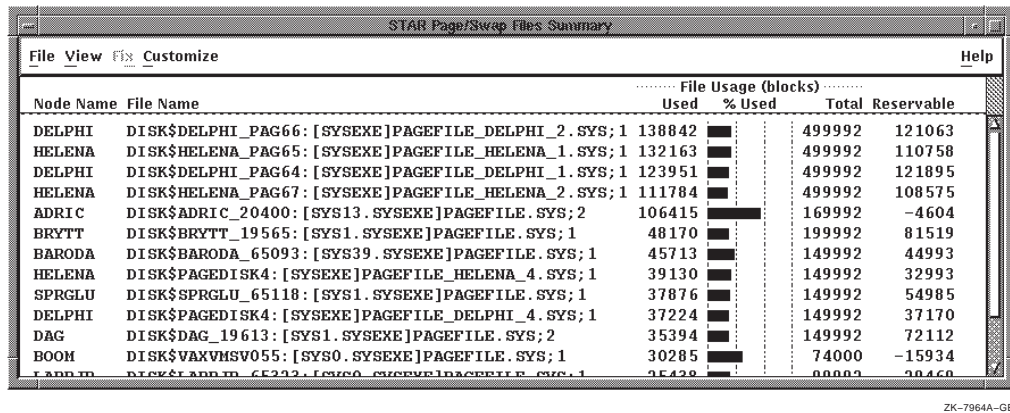

You can open a Page/Swap File Summary window from the Event Log or System Overview windows, as follows:

- In the Event Log window, click MB3 on any Page/Swap space low-related event, and choose Display from the menu.
- In the System Overview window:
 1. Click MB3 on any node or group line, and choose Display from the menu.
 2. Choose Page/Swap File Summary from the submenu.

Table 3–10 describes the Page/Swap File Summary window data fields.

Table 3–10 Page/Swap File Summary Window Data Fields

Field	Displays
Node Name	The name of the node on which the page/swap file resides.
File Name	The name of the page/swap file. For secondary page/swap files, the file name is obtained by a special AST to the job controller on the remote node. DECamds makes one attempt to retrieve the file name.
Used	The number of used pages or pagelet blocks within the file.
% Used	A graph representing the percentage of the blocks from the available page or pagelet blocks in each file.
Total	The total number of pages or pagelet blocks within the file.

(continued on next page)

Table 3–10 (Cont.) Page/Swap File Summary Window Data Fields

Field	Displays
Reservable	The number of pages or pagelet blocks that can be logically claimed by a process for future physical allocation. This value can be listed as a negative value, since it is merely a value of a process's interest in getting pages from the file. If every process currently executing needed to use the file, then this value is the debt that is owed.

DECamds detects the following page and swap file-related events and displays them in the Event Log window. *Node* is replaced by the name of the node to which the event is related.

- LOPGSP, *node* file page file space is low
- LOSWSP, *node* file swap file space is low
- NOPGFL, *node* has no page file
- NOSWFL, *node* has no swap file

3.10 Process I/O Summary Window

The Process I/O Summary window shown in Figure 3–12 displays summary statistics about process I/O rates and quotas. Use the Process I/O Summary window for I/O issues that may be caused by I/O-intensive users or I/O bottlenecks.

Figure 3–12 Process I/O Summary Window

EDISON Process I/O Summary										
File View Fix Customize										Help
PID	Process Name	I/O Rates per second			Open Files	Remaining Quotas				
		DIO	BIO	PIO		DIO	BIO	Bytes	Files	
20A0005B	DECH\$SERVER_0	0.00	0.83	0.00	21	100	92	38224	179	
20A000A4	Dana's Dad 2	1.08	0.33	0.00	9	250	249	11984	591	
20A000A6	AMDS\$COMH	0.00	14.69	0.00	9	100	199	11984	591	
20A00094	Dana's Dad	0.00	0.00	0.00	8	250	246	75728	592	
20A0004D	AUDIT_SERVER	0.00	0.00	0.00	7	200	198	97632	93	
20A0006B	SMISERVER	0.00	0.00	0.00	6	100	97	37312	94	
20A00063	SQLSRV\$SERVER	0.00	0.00	0.00	5	100	254	39552	95	
20A00056	EVL				4	100	97	37184	96	
20A0009A	DECH\$MNM	0.00	0.00	0.00	3	250	249	89168	597	
20A00050	SECURITY_SERVER	0.00	0.00	0.00	3	200	199	66528	97	
20A0004E	JOB_CONTROL	0.00	0.00	0.00	3	200	199	1637824	197	

ZK-7965A-GE

To open a Process I/O Summary window, do one of the following:

- In the Node Summary window, double-click in the I/O area.
- On the View menu in the Single Disk Summary window, choose Display Process I/O Summary.
- In the System Overview window, double-click on the BIO or DIO fields for any node. You can also click MB3 on any field for any node, choose Display from the menu, and choose Process I/O Summary from the submenu.
- To open a Process I/O Summary window for every node in a group, in the System Overview window, click MB3 on a group line, choose Display from the menu, and choose Process I/O Summary from the submenu.

Managing DECamds Data Windows

3.10 Process I/O Summary Window

- In the Event Log window, click MB3 on any process I/O-related event, and choose Display from the menu.

You can open a window about a specific process in the Process I/O Summary window by double-clicking on the process name.

Table 3–11 describes the Process I/O Summary window data fields.

Table 3–11 Process I/O Summary Window Data Fields

Field	Displays
PID	The process identifier, a 32-bit value that uniquely identifies a process.
Process Name	The current process name.
Direct I/O Rate (DIO)	The rate at which I/O transfers occur between the system devices and the pages or pagelets that contain the process buffer that the system locks in physical memory.
Buffered I/O Rate (BIO)	The rate at which I/O transfers occur between the process buffer and an intermediate buffer from the system buffer pool.
Paging I/O Rate (PIO)	The rate of READ attempts necessary to satisfy page faults (also known as Page Read I/O or the Hard Fault Rate).
Open Files	The number of open files.
Direct I/O Limit Remaining (DIO)	The number of remaining direct I/O limit operations available before the process reaches its quota. DIOLM quota is the maximum number of direct I/O operations a process may have outstanding at one time.
Buffered I/O Limit Remaining (BIO)	The number of remaining buffered I/O operations available before the process reaches its quota. BIOLM quota is the maximum number of buffered I/O operations a process may have outstanding at one time.
Byte Limit Remaining (Bytes)	The number of buffered I/O bytes available before the process reaches its quota. BYTLM is the maximum number of bytes of nonpaged system dynamic memory that a process can claim at one time.
Open File Limit Remaining (Files)	The number of additional files the process can open before reaching its quota. FILLM quota is the maximum number of files that can be opened simultaneously by the process, including active network logical links.


DECamds detects the following process I/O-related events and displays them in the Event Log window. *Node process* is replaced by the name of the process to which the event is related.

LOBIOQ, *node process* has used most of its BIOLM process quota
 LOBYTQ, *node process* has used most of its BYTLM job quota
 LODIOQ, *node process* has used most of its DIOLM process quota
 LOFILQ, *node process* has used most of its FILLM job quota
 PRBIOR, *node process* buffered I/O rate is high
 PRDIOR, *node process* direct I/O rate is high
 PRPIOR, *node process* paging I/O rate is high

3.11 Single Lock Summary Window

The Single Lock Summary window shown in Figure 3–13 displays data about a blocking lock and all locks in the granted, conversion, and waiting queues. You can use it to get detailed information about a lock contention situation. The lock name is specified in the title bar. All locks are written to AMDS\$LOCK_LOG.LOG; see Section B.3 for more information.

Figure 3–13 Single Lock Summary Window

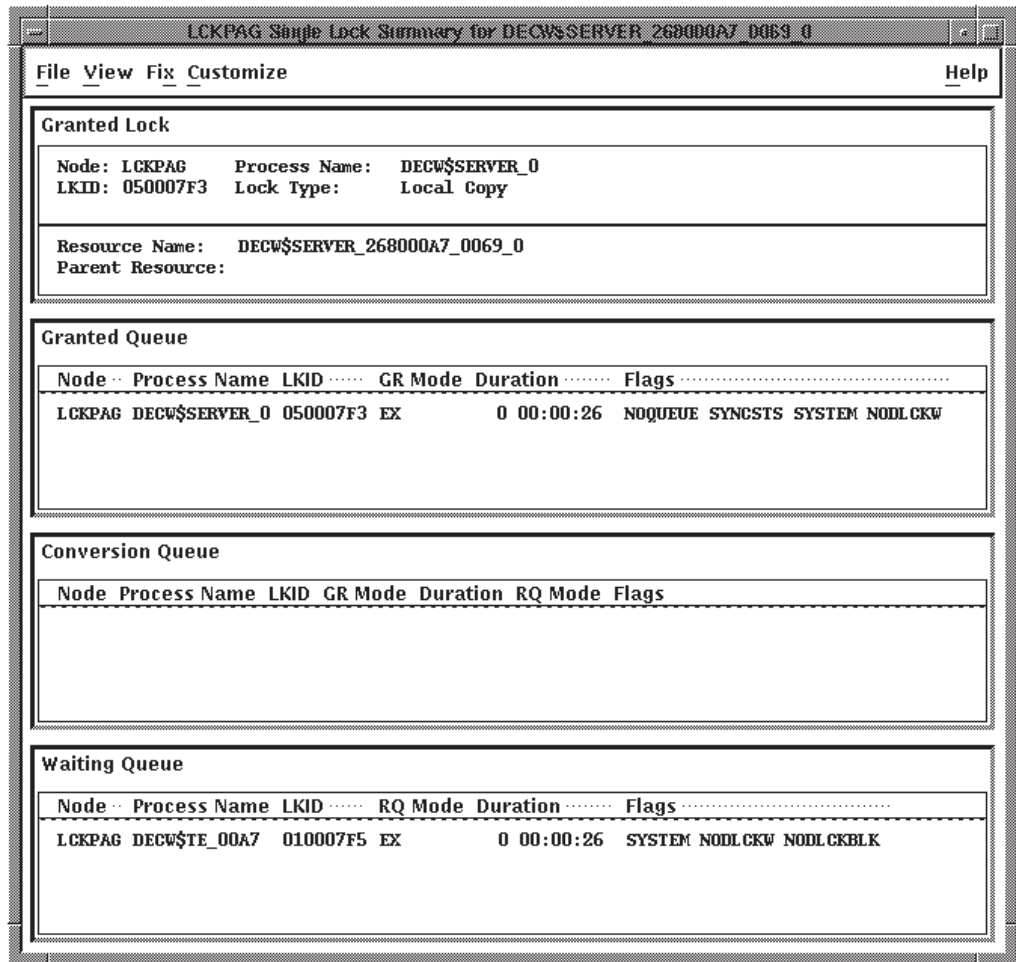

ZK-7966A-GE

If a Single Lock Summary window cannot determine the node name for the group, it uses the Cluster System Identification (CSID) value, which the VMScluster software uses to uniquely identify cluster members.

To open a Single Lock Summary window, do one of the following:

- In the Lock Contention Summary window, double-click on any field. You can also click MB3 on any field, and choose Display Lock from the menu.
- In the View menu of the Lock Contention Summary window, choose Display Lock.
- In the Event Log window, click MB3 on any lock blocking-related or lock waiting-related event, and choose Display from the menu.

Managing DECamds Data Windows

3.11 Single Lock Summary Window

Table 3–12 describes the Single Lock Summary window data fields.

Table 3–12 Single Lock Summary Window Data Fields

Field	Displays
Granted Lock	
Type	One of the following: Local Copy, Process Copy, or Master Copy.
Node	The node name on which the lock is granted.
Process Name	The name of the process owning the blocking lock.
LKID	The lock ID value (which is useful with SDA).
Resource Name	The name of the resource.
Parent Resource Name	The name of the parent resource (if any).
Granted, Conversion, and Waiting Queue	
Node	The node on which the lock block resides.
Process Name	The process name of the process owning the lock.
LKID	The Lock ID value (which is useful with SDA).
GR Mode	One of the following modes at which the lock is granted: EX, CW, CR, PW, PR, NL.
RQ Mode	One of the following modes at which the lock is requested: EX, CW, CR, PW, PR, NL.
Duration	The length of time lock has been in current queue with respect to time the console application has found it.
Flags	The flags specified with the \$ENQ(W) request.

You can open a window about a specific process in the Single Lock Summary window by double-clicking on the process name.

Note

Processes that are labeled *unknown* are associated with system locks. They cannot be opened.


DECamds detects the following single lock-related events and displays them in the Event Log window. Italicized words are replaced with actual values.

LCKBLK, *node process* blocking resource *resource*
 LCKWAT, *node process* waiting for resource *resource* granted to process on
 node *node*

3.12 Single Process Summary Window

The Single Process Summary window shown in Figure 3–14 displays summary data about a process, including Execution Rates, Process Quotas in Use, Wait States, and Job Quotas in Use.

Figure 3–14 Single Process Summary Window

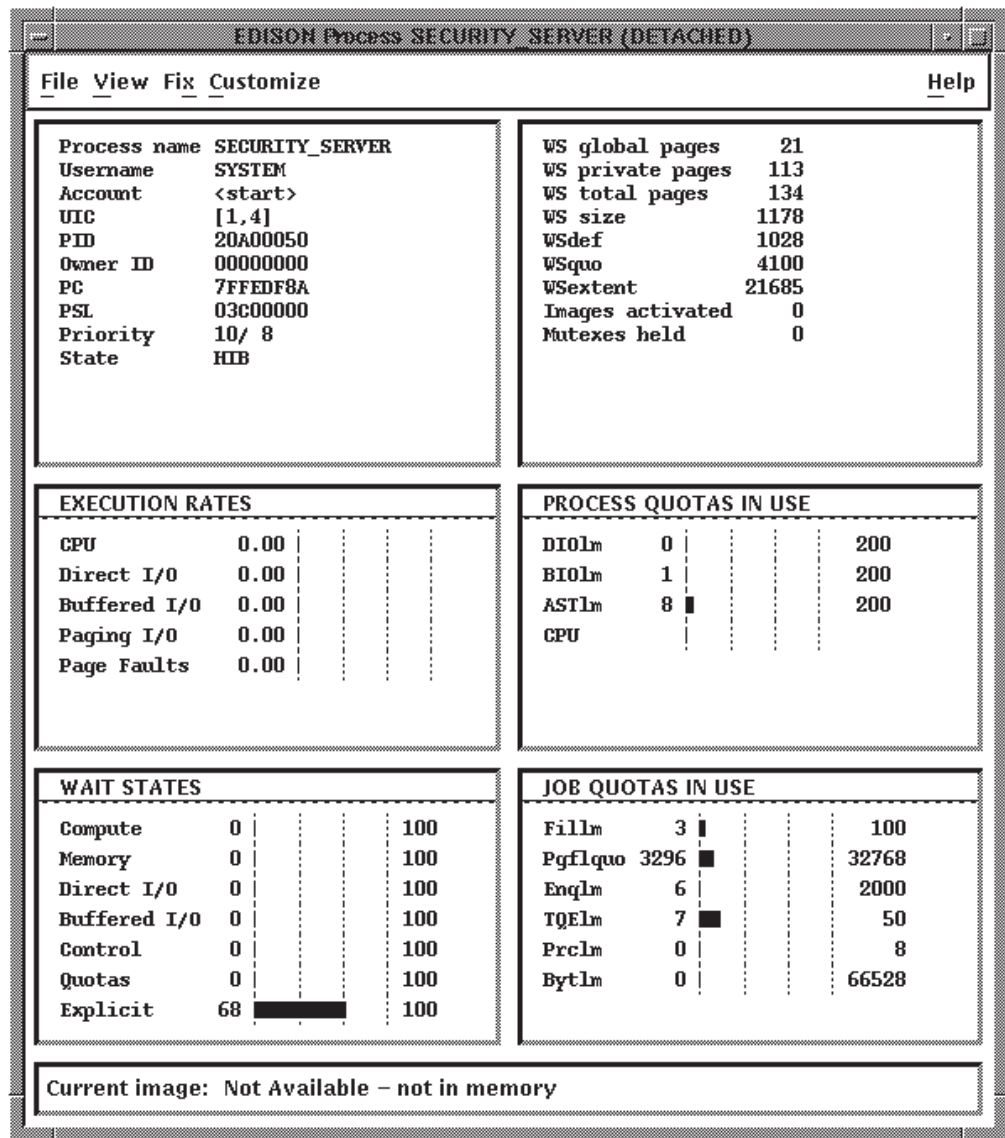

ZK-7967A-GE

To open a Single Process Summary window, do one of the following:

- In any window that displays processes (CPU, CPU Modes, Memory, Process I/O, and Single Lock Summary), double-click on any field. You can also click MB3 on any field in a process line, and choose Display from the pop-up menu.
- You can also click on any field in a process line, and choose Display Process from the View menu.

Managing DECamds Data Windows

3.12 Single Process Summary Window

- In the Event Log window, double-click on a process-related event. You can also click MB3 on a process-related event, choose Display from the menu, and choose Single Process in the dialog box.

Table 3–13 describes the Single Process Summary window data fields.

Table 3–13 Single Process Summary Window Data Fields

Field	Displays
Process Name	The name of the process.
Username	The username of the user owning the process.
Account	The string assigned to the user by the system manager.
UIC	The user identification code (UIC), a pair of numbers or character strings designating the group and user.
PID	The process identifier, a 32-bit value that uniquely identifies a process.
Owner ID	The process identifier (PID) of the process that created the process displayed in the window. If 0, then the process is a parent process.
PC	The program counter. On OpenVMS VAX systems, this is the address of the next instruction the CPU will execute. On OpenVMS Alpha systems, this value is displayed as 0, since the data is not readily available to the Data Provider node.
PSL	The Processor Status Longword (PSL). On OpenVMS VAX systems, this indicates the current processor mode (user, kernel, and so on) and its interrupt level. On OpenVMS Alpha systems, this value is displayed as 0, since the data is not readily available to the Data Provider node.
Priority	The computable and base priority of the process. Priority is an integer between 0 and 31. Processes with higher priority get more CPU time.

(continued on next page)

Managing DECamds Data Windows

3.12 Single Process Summary Window

Table 3–13 (Cont.) Single Process Summary Window Data Fields

Field	Displays
State	One of the following process states:
<i>CEF</i>	Common Event Flag, waiting for a Common Event Flag
<i>COLPG</i>	Collided Page Wait, involuntary wait state; likely indicates a memory shortage, waiting for hard page faults
<i>COM</i>	Computable; ready to execute
<i>COMO</i>	Computable Outswapped, COM, but swapped out
<i>CUR</i>	Current, currently executing in a CPU
<i>FPW</i>	Free Page Wait, involuntary wait state; likely indicates a memory shortage
<i>LEF</i>	Local Event Flag, waiting for a Local Event Flag
<i>LEFO</i>	Local Event Flag Outswapped; LEF, but outswapped
<i>HIB</i>	Hibernate, voluntary wait state requested by the process; it is inactive
<i>HIBO</i>	Hibernate Outswapped, hibernating but swapped out
<i>MWAIT</i>	Miscellaneous Resource Wait, involuntary wait state; possibly caused by a shortage of a systemwide resource such as no page or swap file capacity or synchronizations for single threaded code
<i>PFW</i>	Page Fault Wait, involuntary wait state; possibly indicates a memory shortage, waiting for hard page faults
<i>RWAST</i>	Resource Wait State, waiting for delivery of an asynchronous system trap (AST) that signals a resource availability; usually an I/O is outstanding or a process quota is exhausted
<i>RWBRK</i>	Resource Wait for BROADCAST to finish
<i>RWCAP</i>	Resource Wait for CPU Capability
<i>RWCLU</i>	Resource Wait for Cluster Transition
<i>RWCSV</i>	Resource Wait for Cluster Server Process
<i>RWIMG</i>	Resource Wait for Image Activation Lock
<i>RWLCK</i>	Resource Wait for Lock ID data base
<i>RWMBX</i>	Resource Wait on MailBox, either waiting for data in mailbox (to read) or waiting to place data (write) into a full mailbox (some other process has not read from it; mailbox is full so this process cannot write).
<i>RWMPB</i>	Resource Wait for Modified Page writer Busy
<i>RWMPE</i>	Resource Wait for Modified Page list Empty
<i>RWNPG</i>	Resource Wait for Non Paged Pool
<i>RWPAG</i>	Resource Wait for Paged Pool
<i>RWPFF</i>	Resource Wait for Page File Full
<i>RWQUO</i>	Resource Wait for Pooled Quota
<i>RWSCS</i>	Resource Wait for System Communication Services
<i>RWSWP</i>	Resource Wait for Swap File space
<i>SUSP</i>	Suspended, wait state process placed into suspension; it can be resumed at the request of an external process
<i>SUSPO</i>	Suspended Outswapped, suspended but swapped out

(continued on next page)

Managing DECamds Data Windows

3.12 Single Process Summary Window

Table 3–13 (Cont.) Single Process Summary Window Data Fields

Field	Displays
WS Global Pages	The shared data or code between processes listed in pages or pagelets.
WS Private Pages	The amount of accessible memory, listed in pages or pagelets.
WS Total Pages	The sum of global and private pages or pagelets.
WS Size	The working set size, number of pages or pagelets of memory the process is allowed to use. This value is periodically adjusted by the operating system based on analysis of page faults relative to CPU time used. When it increases in large units, this indicates a process is taking a lot of page faults and its memory allocation is increasing.
WSdef	The working set default, the initial limit to the number of physical pages or pagelets of memory the process can use. This parameter is listed in the user authorization file (UAF); discrepancies between the UAF value and the displayed value are due to page/longword boundary rounding or other adjustments made by the operating system.
WSquo	The working set quota, the maximum amount of physical pages or pagelets of memory the process can lock into its working set. This parameter is listed in the UAF; discrepancies between the UAF value and the displayed value are due to page/longword boundary rounding or other adjustments made by the operating system.
WSextent	The working set extent, the maximum number of physical pages or pagelets of memory the system will allocate for the process. The system provides memory to a process beyond its quota only when it has an excess of free pages and can be recalled if necessary. This parameter is listed in the UAF; any discrepancies between the UAF value and the displayed value are due to page/longword boundary rounding or other adjustments made by the operating system.
Images Activated	The number of times an image is activated.
Mutexes Held	The number of mutual exclusions (mutexes) held. Persistent values other than zero (0) require analysis. A mutex is similar to a lock but is restricted to one CPU. When a process holds a mutex, its priority is temporarily incremented to 16.

(continued on next page)

Managing DECamds Data Windows

3.12 Single Process Summary Window

Table 3–13 (Cont.) Single Process Summary Window Data Fields

Field	Displays
Execution Rates	
CPU Rate	The percent of CPU time used by this process. This is the ratio of CPU time to elapsed time. CPU rate is also displayed in the bar graph.
Direct I/O Rate (DIO)	The rate at which I/O transfers take place from the pages or pagelets containing the process buffer that the system locks in physical memory to the system devices.
Buffered I/O Rate (BIO)	The rate at which I/O transfers take place for the process buffer from an intermediate buffer from the system buffer pool.
Paging I/O Rate (PIO)	The rate of READ attempts necessary to satisfy page faults. This is also known as Page Read I/O or the Hard Fault Rate.
Page Fault Rate	The page faults per second for the process. The bar graph visually represents page faults per second.
Process Quotas in Use¹	
Direct I/O Limit (DIOLM)	A bar graph representing current count of DIOs used with respect to the limit that can be attained.
Buffered I/O Limit (BIOLM)	A bar graph representing current count of BIOs used with respect to the limit that can be attained.
Asynchronous System Traps Limit (ASTLM)	A bar graph representing current count of ASTs used with respect to the limit that can be attained.
CPU Time Limit (CPULM)	A bar graph representing current count of CPU Time used with respect to the limit that can be attained. If the limit is 0, then this value is not used.
Wait States²	
Compute	A relative value indicating that the process is waiting for CPU time. The included states are COM, COMO, RWCAP.
Memory	A relative value indicating that the process is waiting for a page fault that requires data to be read from disk; common during image activation. The included states are PFW, COLPG, FPG, RWPAG, RWNPG, RWMPE, RWMPB.
Direct I/O	A relative value indicating that the process is waiting for data to be read from or written to a disk. The included state is DIO.
Buffered I/O	A relative value indicating that the process is waiting for data to be read from or written to a slower device such as a terminal, line printer, or mailbox. The included state is BIO.
Control	A relative value indicating that the process is waiting for another process to release control of some resource. The included states are CEF, MWAIT, LEF, LEFO, RWAST, RWMBX, RWSCS, RWCLU, RWCSV, RWUNK, and LEF waiting for a ENQ.
Quotas	A relative value indicating that the process is waiting because the process has exceeded some quota. The included states are QUOTA and RWAST_QUOTA.

¹When you display the SWAPPER process, no values are listed in this section. The SWAPPER process does not have quotas defined in the same way other system and user processes do.

²The wait state specifies why a process cannot execute, based on application-specific calculations.

(continued on next page)

Managing DECamds Data Windows

3.12 Single Process Summary Window

Table 3–13 (Cont.) Single Process Summary Window Data Fields

Field	Displays
Wait States²	
Explicit	A relative value indicating that the process is waiting because process asked to wait, such as a hibernate system service. The included states are HIB, HIBO, SUSP, SUSPO, and LEF waiting for a TQE.
Job Quotas in Use	
File Limit (FILLM)	A bar graph representing current number of open files with respect to the limit that can be attained.
Page File Quota (PGFLQUO)	A bar graph representing current number of disk blocks in page file that the process can use with respect to the limit that can be attained.
Enqueue Limit (ENQLM)	A bar graph representing current count of resources (lock blocks) queued with respect to the limit that can be attained.
Timer Queue Entry Limit (TQELM)	A bar graph representing current count of timer requests with respect to the limit that can be attained.
Process Limit (PRCLM)	A bar graph representing current count of subprocesses created with respect to the limit that can be attained.
Buffered I/O Byte Limit (BYTLM)	A bar graph representing current count of bytes used for buffered I/O transfers with respect to the limit that can be attained.
Image Name	The name of the currently executing image - if available. If this field does not appear, then the data is not resident in memory.

²The wait state specifies why a process cannot execute, based on application-specific calculations.

DECamds detects the following single process-related events and displays them in the Event Log window. *Node* is replaced by the name of the node to which the event is related. *Process* is replaced by the name of the process to which the event is related.

LOASTQ, *node process* has used most of its ASTLM process quota
 LOBIOQ, *node process* has used most of its BIOLM process quota
 LOBYTQ, *node process* has used most of its BYTLM job quota
 LODIOQ, *node process* has used most of its DIOLM process quota
 LOENQU, *node process* has used most of its ENQLM job quota
 LOFILQ, *node process* has used most of its FILLM job quota
 LOPGFQ, *node process* has used most of its PGFLQUOTA job quota
 LOPRCQ, *node process* has used most of its PRCLM process quota
 LOTQEQ, *node process* has used most of its TQELM job quota
 LOWEXT, *node process* working set extent is too small
 LOWSQU, *node process* working set quota is too small
 PRBIOR, *node process* buffered I/O rate is high
 PRBIOW, *node process* waiting for buffered I/O
 PRCCOM, *node process* waiting in COM or COMO
 PRCCUR, *node process* has high CPU rate
 PRCMUT, *node process* waiting for a mutex
 PRCPUL, *node process* has used most of its CPULIM process quota
 PRCPWT, *node process* waiting in COLPG, PFW, or FPG
 PRCQUO, *node process* waiting for a quota
 PRCRWA, *node process* waiting in RWAST
 PRCRWC, *node process* waiting in RWCAP

Managing DECamds Data Windows

3.12 Single Process Summary Window

PRCRWM, *node process* waiting in RWMBX
PRCRWP, *node process* waiting in RWPAG, PWNPG, RWMPE, or RWMPB
PRCRWS, *node process* waiting in RWSCS, RWCLU, or RWCSV
PRCUNK, *node process* waiting for a system resource
PRDIOR, *node process* direct I/O rate is high
PRDIOW, *node process* waiting for direct I/O
PRLCKW, *node process* waiting for a lock
PRPGFL, *node process* high page fault rate
PRPIOR, *node process* paging I/O rate is high

3.13 Cluster Transition/Overview Summary Window

The Cluster Transition/Overview Summary window shown in Figure 3–15 displays information about each node in a VMScluster. This window is very similar to the System Overview window; however, the Cluster Transition window lists only one cluster for each set of nodes in a cluster, while the System Overview window lists all the nodes and the user-defined groups the nodes are in.

The window displays summary information as well as information about individual nodes: System Communication Services (SCS) name, SCS ID, Cluster System ID, Votes, Lock Directory Weight value, cluster status, and last transition time.

The data items shown in the window correspond to data that the Show Cluster utility displays for the SYSTEM and MEMBERS classes. A status field display of "unknown" usually indicates that DECamds is not communicating with the node.

Managing DECamds Data Windows

3.13 Cluster Transition/Overview Summary Window

Figure 3-15 Cluster Transition/Overview Summary Window

The screenshot shows a window titled "Cluster Transition/Overview Summary". It has a menu bar with "File", "View", "Fix", "Customize", and "Help". The window is divided into two main sections: "Summary" and "Cluster Members".

Summary

Formed:	29-JUL-1995 11:47	Members In:	29
Last Trans:	1-NOV-1995 10:46	Members Out:	2
Votes:	12	Quorum:	8
Expected Votes:	15	QD Votes:	65535
Failover Step:	55	Failover ID:	672

Cluster Members

SCS Name	SCS Id	CSID	Votes	Expect	Quorum	LclDirWt	Status	Transition Time
SAREKS	4D12	100E5	0	1	1	0	UNKNOWN	16-OCT-1995 14:25
WEEKS	4EF0	100DD	0	15	8	0	UNKNOWN	10-OCT-1995 09:43
MACHU	FD77	20002	0	5	3	0	MEMBER	28-OCT-1995 12:06
RUMAD	4C60	100F7	0	13	7	0	MEMBER	28-OCT-1995 11:52
DFODIL	FF60	100FC	0	3	2	0	MEMBER	28-OCT-1995 11:55
AZSUN	4D56	20006	1	13	7	0	MEMBER	30-OCT-1995 21:43
CLAWS	4C39	100EB	1	13	7	0	MEMBER	16-OCT-1995 16:22
CALPAL	4C34	100C8	1	13	7	1	MEMBER	21-SEP-1995 06:48
VARS	4C32	100EA	1	13	7	1	MEMBER	1-NOV-1995 10:46
CENPOP	FD22	20003	0	15	8	0	MEMBER	28-OCT-1995 12:11
LOADQ	4C31	100A2	1	13	7	1	MEMBER	8-SEP-1995 08:47
GNRS	FC2E	100F9	0	15	8	0	MEMBER	28-OCT-1995 11:54
PITHOD	FE29	20008	0	3	2	0	MEMBER	31-OCT-1995 11:08
4X4TRK	FE26	100FF	0	15	8	0	MEMBER	28-OCT-1995 12:01
VMSRMS	FD24	100FA	0	15	8	0	MEMBER	28-OCT-1995 11:55
ALTOS	4D0F	100DB	1	13	7	1	MEMBER	6-OCT-1995 06:41
FARKLE	FE03	20001	0	3	2	0	MEMBER	28-OCT-1995 12:01
TSAVO	4CFE	100CF	1	13	7	1	MEMBER	2-OCT-1995 06:56
ETOSHA	4CF3	100CE	1	13	7	1	MEMBER	29-SEP-1995 08:19
CLAIR	4C0F	100F4	0	15	8	0	MEMBER	24-OCT-1995 09:10
MILADY	4ED6	100FG	0	3	2	0	MEMBER	28-OCT-1995 11:51
CHOBE	4CD6	20009	1	13	7	1	MEMBER	1-NOV-1995 10:46
ZOON	4CC7	20004	0	3	2	0	MEMBER	30-OCT-1995 15:47
ZAPNOT	4CBB	100ED	1	13	7	1	MEMBER	17-OCT-1995 13:38
ZBOYS	FDAA	100C5	0	13	7	0	MEMBER	15-SEP-1995 13:36
GRNOT	4CA7	100CO	1	13	7	1	MEMBER	13-SEP-1995 13:51
BARNEY	FFA2	100FE	0	3	2	0	MEMBER	28-OCT-1995 11:56
ARUSHA	4CA1	100FO	1	13	7	1	MEMBER	20-OCT-1995 06:43
SUB4	FE94	100D9	0	3	2	0	MEMBER	4-OCT-1995 16:37
GLOBBO	4C93	100FD	0	15	8	0	MEMBER	28-OCT-1995 11:55

ZK-8545A-GE

To open the Cluster Transition/Overview Summary window, follow these steps:

1. In the System Overview window, click MB3 on a node line.
The system displays a pop-up menu.
2. Choose Display from the menu and Cluster Transition Summary from the submenu.
The system displays the Cluster Transition/Overview Summary window.

Managing DECamds Data Windows

3.13 Cluster Transition/Overview Summary Window

To open the Cluster Transition window from the Event Log window, click MB3 on a cluster-related event, choose Display from the menu, and choose Cluster Transition Summary from the list.

Note: The Cluster Transition Summary menu option is not available for nodes that are not in the cluster, nor is it available from group lines in the display.

3.13.1 Data Displayed

The Cluster Transition/Overview window has two panel displays:

- Summary (top) panel: displays VMScLuster summary information.
- Cluster Members (bottom) panel: lists each node in the cluster.

Table 3–14 describes the Summary panel data fields.

Table 3–14 Data Items in the Summary Panel of the Cluster Transition/Overview Summary Window

Data Item	Description
Formed	Date and time the VMScLuster was formed.
Last Trans	Date and time of the most recent VMScLuster state transition.
Votes	Total number of quorum votes being contributed by all cluster members and quorum disk.
Expected Votes	Number of votes expected to be contributed by all members of the cluster as determined by the connection manager. This value is based on the maximum of EXPECTED_VOTES and the maximized value of VOTES.
Failover Step	Current failover step index.
Members In	Number of members of the cluster DECamds has a connection to.
Members Out	Number of members of the cluster DECamds either has no connection to or has lost connection to.
Quorum	Number of votes required to keep cluster above quorum.
QD Votes	Number of votes given to Quorum Disk. A value of 65535 means there is no Quorum Disk.
Failover ID	Failover Instance Identification.

Table 3–15 describes the Cluster Members panel data fields.

Table 3–15 Data Items in the Cluster Members Panel of the Cluster Transition/Overview Summary Window

Data Item	Description
SCS Name	System Communication Services name for the node (system parameter SCSNODE)
SCS Id	System Communication Services identification for the node (system parameter SCSYSTEMID)
CSID	Cluster System Identification
Votes	Number of votes the member contributes
Expect	Expected votes to be contributed as set by the EXPECTED_VOTES

(continued on next page)

Managing DECamds Data Windows

3.13 Cluster Transition/Overview Summary Window

Table 3–15 (Cont.) Data Items in the Cluster Members Panel of the Cluster Transition/Overview Summary Window

Data Item	Description
Quorum	Recommended quorum value derived from the expected votes
LckDirWt	Lock Manager distributed directory weight as determined by the LCKDIRWT system parameter
Status	Current cluster member status: MEMBER, UNKNOWN, or BRK_NON (break non-member)
Transition Time	Time cluster member had last transition

3.13.2 Notes About the Display

Following are notes about the display of data in the window:

- No highlighting conventions are used in the window; all data items are displayed in bright mode.
- You cannot filter out any data.
- The data items in the window are sorted on an "as-found" basis. You cannot change the sort criteria.
- When you click on an item, DECamds temporarily stops updating the window for 15 seconds or until you choose an item from a menu.
- You can change collection intervals.

3.13.3 New Event in Window

The following new event has been created for the display in this window:

```
LOVOTE, 'node' VOTES count is close to or below QUORUM
```

DECamds signals this event when the difference between the cluster's QUORUM and VOTES values *is less than* the threshold for the event. The default threshold for the event is 1.

3.13.4 From This Window...

From this window, you can do the following:

- Double-click MB1 on a line to open a Node Summary display.
- Highlight a node and select a menu option to display either of the following:
 - Node Summary display of nodes that DECamds recognizes. DECamds ignores nodes that are unknown or break_non-member.
 - SCA Summary display of nodes that DECamds recognizes. DECamds ignores nodes that are unknown or break_non-member.
- Perform the Cluster Quorum Adjustment fix.

This fix forces a cluster quorum adjustment on the entire OpenVMS cluster on which the fix is run.

To perform the fix, first select the Fix option on the menu bar. Then the Quorum option on the menu displayed. DECamds moves through the cluster membership to find the first member node it can communicate with and performs a Quorum Adjustment fix on that node.

3.14 System Communication Architecture (SCA) Summary Window

3.14 System Communication Architecture (SCA) Summary Window

The System Communication Architecture Summary (SCA Summary) window shown in Figure 3-16 displays information about a selected node's virtual circuits and connections to other nodes in a cluster. (The display represents the view one node has of other nodes in the cluster.) More than one type of virtual circuit indicates that more than one path to the remote node exists.

Figure 3-16 SCA Summary Window

DFODIL System Communication Architecture Summary													
File View Fix Customize Help													
NodeName	VC (Type)	Local SysApp	Remote SysApp	State	Messages		LB Mapped	Block Data (KB)		Block Transfer		Datagrams	
					Sent	Rcvd		Sent	Rcvd	Sent	Rcvd	Sent	Rcvd
							*MB3	to	tw	Rate	of	Rate	display
MACHU	FEAD: (LAN)			OPEN	0.00	0.00	24	0	18	0	50	0	0
RUNAD	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0
DFODIL	FEAD: (LAN)			OPEN	0.00	0.00	0	0	0	0	0	0	0
AGSUI	FEAD: (LAN)			OPEN	0.04	0.04	16	0	7	0	25	0	0
CLAMS	FEAD: (LAN)			OPEN	0.04	0.04	65	15	22	14	39	0	0
CALPAL	FEAD: (LAN)			OPEN	0.00	0.00	916	3	148	12	561	0	0
VAKS	FEAD: (LAN)			OPEN	0.01	0.00	6413	31	432	22	1772	0	0
CENPCP	FEAD: (LAN)			OPEN	0.00	0.00	17	0	7	0	25	0	0
LOADR	FEAD: (LAN)			OPEN	0.04	0.04	16089	15	118	35	447	0	0
CHRS	FEAD: (LAN)			OPEN	0.00	0.00	15	0	7	0	25	0	0
PITWOD	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0
4H4TK	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0
VMSRHS	FEAD: (LAN)			OPEN	0.00	0.00	26	0	8	0	29	0	0
ALLOS	FEAD: (LAN)			OPEN	0.01	0.00	258	18	225	21	388	0	0
FARKLE	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0
TSRUC	FEAD: (LAN)			OPEN	0.00	0.00	163	4	155	12	610	0	0
ETOSHA	FEAD: (LAN)			OPEN	0.04	0.04	148	8	135	17	505	0	0
CLAIR	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0
HILARY	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0
CHOBE	FEAD: (LAN)			OPEN	0.00	0.00	46	0	38	4	154	0	0
BOON	FEAD: (LAN)			OPEN	0.04	0.04	16	0	7	0	25	0	0
ZAPNWT	FEAD: (LAN)			OPEN	0.00	0.00	3025	4	171	14	596	0	0
2BOYS	FEAD: (LAN)			OPEN	0.04	0.04	47	0	7	0	25	0	0
ORNOE	FEAD: (LAN)			OPEN	0.01	0.00	3284	2	268	6	927	0	0
BARNEY	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0
LEUSHA	FEAD: (LAN)			OPEN	0.04	0.04	234	13	191	29	698	0	0
SURE4	FEAD: (LAN)			OPEN	0.00	0.00	16	0	7	0	25	0	0

ZK-8546A-GE

Each line in the window shows either a summary of all system applications (SysApps) using the virtual circuit communication or the communication on the connection between a local and a remote SysApp. The data displayed in the window is similar to the information that the Show Cluster utility displays for the CIRCUITS, CONNECTIONS, and COUNTERS classes. Unlike Show Cluster, however, this display shows only SCA connections to other OpenVMS nodes; it does not show SCA connections to the Disk Storage Architecture (DSA) or to devices such as FDDI or DSSI disk controllers.

By clicking MB3 on a node name and choosing View SysApps from the pop-up menu, you can display the system applications that are using virtual circuits. This option expands the list below a virtual circuit to show all the system applications that contribute to that virtual circuit. (The SysApp lines are dimmed and right-justified.)

To hide the display of system applications, click MB3 and choose Hide SysApps from the pop-up menu.

To display a menu that allows you to toggle between Raw and Rate data, click MB3 on the data to the right of "State." (For messages, the default is the display of rate data; raw data is the default for all other types of data.)

Managing DECamds Data Windows

3.14 System Communication Architecture (SCA) Summary Window

To open an SCA Summary window, follow these steps:

1. In the Cluster Transition/Overview Summary window, click MB1 or MB3 on an SCS name.

The system displays a pop-up menu.

2. Choose Display SCA Summary.

The system displays the System Communication Architecture (SCA) Summary window.

Table 3–16 describes the SCA Summary window data fields.

Table 3–16 Data Items in the SCA Summary Window

Data Item	Description
NodeName	SCS name of the remotely connected node.
VC(Type)	The virtual circuit being used and its type.
State	The state of the virtual circuit connection.
Messages	Relatively small data packets sent and received between nodes for control information.
Block Transfer	Fields listing the count of the number of block data transfers and requests initiated.
KB Mapped	Field listing the number of kilobytes mapped for block data transfer. Note: This field is available in RAW data format only.
Block Data (KB)	Fields listing in kilobytes the data transferred via block data transfer.
Datagrams	Number of unacknowledged messages sent between virtual circuits.
Credit Wait	Number of times the connection had to wait for a send credit.
BDT Wait	Number of times the connection had to wait for a buffer descriptor.
Local SysApp	Name of the local system application using the virtual circuit.
Remote SysApp	Name of the remote system application being communicated to.

3.14.1 Notes About the Display

Following are notes about the display of data in the window:

- The window does not follow highlighting conventions: virtual circuit lines are displayed brightly and are left-aligned; SysApp lines are dimmed and are indented by a column.
- You cannot filter out any data.
- The data items in the window are sorted on an "as-found" basis. You cannot change sort criteria at this time.
- You can change collection intervals.

3.14.2 New Event in Window

The following new event has been created for the display in this window:

```
LOSTVC, <node> lost virtual circuit (<string>) to node <node>
```

DECamds signals this event when a virtual circuit between two nodes has been lost. This loss might be due either to a cluster node crashing or to cluster problems that caused the virtual circuit to close.

3.14 System Communication Architecture (SCA) Summary Window

3.14.3 From This Window...

From this window, you can display the Network Interconnect System Communication Architecture (NISCA) Summary window. DECams displays one window per virtual circuit provided the virtual circuit is running over a PEA0: device. See Section 3.15 for instructions.

3.15 NISCA Summary Window

The Network Interconnect System Communication Architecture (NISCA) is the transport protocol responsible for carrying messages such as disk I/Os and lock messages across Ethernet and FDDI LANs to other nodes in the cluster. More detailed information about the protocol is in *VMScluster Systems for OpenVMS* in the OpenVMS documentation set.

The NISCA Summary window shown in Figure 3-17 displays detailed information about the LAN (Ethernet or FDDI) connection between two nodes. DECams displays one window per virtual circuit provided the virtual circuit is running over a PEA0: device.


This window is designed to view statistics in real time and to troubleshoot problems found in the NISCA protocol. The window is intended primarily as an aid to diagnosing LAN-related problems. Section F.4 in Appendix F of the *VMScluster Systems for OpenVMS* describes the parameters shown in this window and tells how to use them to diagnose LAN-related cluster problems.

The window provides the same information as the OpenVMS System Dump Analyzer (SDA) command `SHOW PORTS/VC=VC_nodex`. (Nodex is a node in the cluster; the system defines VC-nodex after a `SHOW PORTS` command is issued from SDA.)

Managing DECamds Data Windows

3.15 NISCA Summary Window

Figure 3–17 NISCA Summary Window

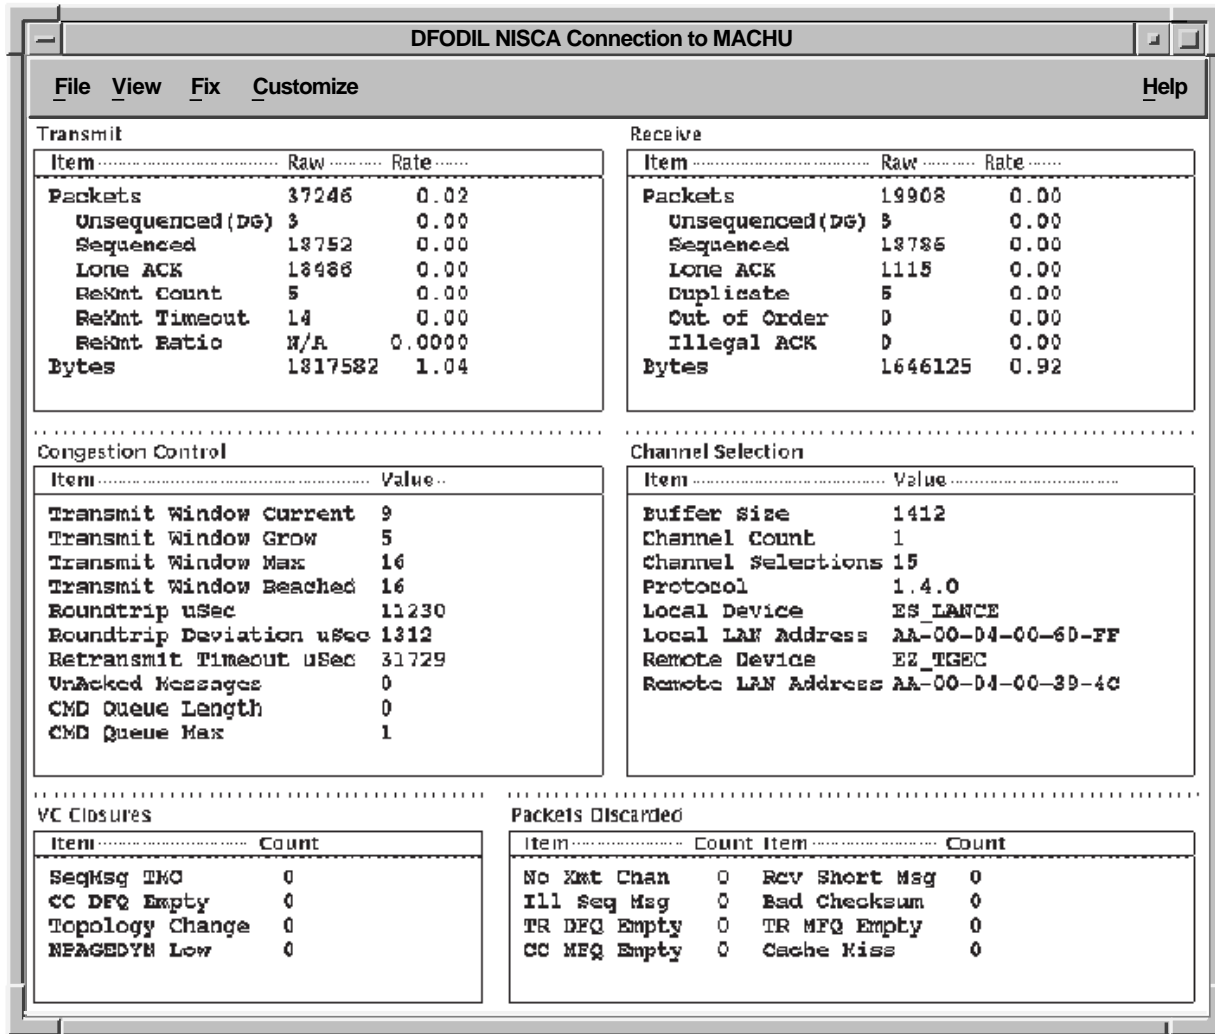

ZK-8547A-GE

To open an NISCA Summary window, follow these steps:

1. In the SCA Summary window, click MB3 on a row with the PEA0: Virtual Circuit.
The system displays a pop-up menu.
2. Choose View SysApps.
The system displays an expanded list below the node name.
3. Click MB3 on a SysApps node.
The system displays a pop-up menu.
4. Choose Display NISCA.
The system displays the NISCA Summary window.

Note: If the Display NISCA option is dimmed, the NISCA protocol is not running for that system application.

Alternatives:

- Instead of steps 1 and 2, you can double-click MB1 on a row with a PEA0: to display an expanded list below the node name.
- Instead of step 3, you can double-click MB1 on a SysApps node to display the NISCA Summary window.

3.15.1 Data Displayed

Panels in the NISCA Summary window contain the data described in the following tables.

Table 3–17 lists data items displayed in the Transmit Panel, which contains data packet transmission information.

Table 3–17 Data Items in the Transmit Panel

Data Item	Description
Packets	Number of packets transmitted through the virtual circuit to the remote node, including both sequenced and unsequenced (channel control) messages, and lone acknowledgments.
Unsequenced (DG)	Count and rate of the number of unsequenced datagram packages transmitted.
Sequenced	Count and rate of the number of sequenced packages transmitted. Sequenced messages are used for application data.
Lone ACK	Count and rate of the number of lone acknowledgments.
ReXmt Count	Number of packets retransmitted. Retransmission occurs when the local node does not receive an acknowledgment for a transmitted packet within a predetermined timeout interval.
ReXmt Timeout	Number of retransmission timeouts that have occurred.
ReXmt Ratio	Ratio of ReXmt Count current and past to the current and past number of sequenced messages sent.
Bytes	Count and rate of the number of bytes transmitted through the virtual circuit.

Table 3–18 describes data items displayed in the Receive Panel, which contains data packet reception information.

Table 3–18 Data Items in the Receive Panel

Data Item	Description
Packets	Number of packets transmitted through the virtual circuit to the remote node, including both sequenced and unsequenced (channel control) messages, and lone acknowledgments.
Unsequenced (DG)	Count and rate of the number of unsequenced packages received.
Sequenced	Count and rate of the number of sequenced packages received. Sequenced messages are used for application data.
Lone ACK	Count and rate of the number of lone acknowledgments.
Duplicate	Number of redundant packets received by this system.
Out of Order	Number of packets received out of order by this system.

(continued on next page)

Managing DECamds Data Windows

3.15 NISCA Summary Window

Table 3–18 (Cont.) Data Items in the Receive Panel

Data Item	Description
Illegal Ack	Number of illegal acknowledgments received.
Bytes	Count and rate of the number of bytes received through the virtual circuit.

Table 3–19 describes data items displayed in the Congestion Control Panel, which contains transmit congestion control information.

The values in the panel list the number of messages that can be sent to the remote node before receiving an acknowledgment and the retransmission timeout.

The system parameter PEDRIVER varies the pipe quota and the timeout value to control the amount of network congestion.

Table 3–19 Data Items in the Congestion Control Panel

Data Item	Description
Transmit Window Current	Current value of the pipe quota (transmit window). After a timeout, the pipe quota is reset to 1 to decrease congestion and is allowed to increase quickly as acknowledgments are received.
Transmit Window Grow	The slow growth threshold: size at which the rate of increase is slowed to avoid congestion on the network again.
Transmit Window Max	Maximum value of pipe quota currently allowed for the virtual circuit based on channel limitations.
Transmit Window Reached	Number of times the entire transmit window was full. If this number is small as compared with the number of sequenced messages transmitted, the local node is not sending large bursts of data to the remote node.
Roundtrip uSec	Average roundtrip time for a packet to be sent and acknowledged. The value is displayed in microseconds.
Roundtrip Deviation uSec	Average deviation of the roundtrip time. The value is displayed in microseconds.
Retransmit Timeout uSec	Value used to determine packet retransmission timeout. If a packet does not receive either an acknowledging or a responding packet, the packet is assumed to be lost and will be resent.
UnAcked Messages	Number of unacknowledged messages.
CMD Queue Length	Current length of all command queues.
CMD Queue Max	Maximum number of commands in queues so far.

Table 3–20 describes data items displayed in the Channel Selection Panel, which contains channel selection information.

Table 3–20 Data Items in the Channel Selection Panel

Data Item	Description
Buffer Size	Maximum PPC data buffer size for this virtual circuit
Channel Count	Number of channels connected to this virtual circuit
Channel Selections	Number of channel selections performed
Protocol	NISCA Protocol version
Local Device	Name of the local device that the channel uses to send and receive packets
Local LAN Address	Address of the local LAN device that performs sends and receives
Remote Device	Name of the remote device that the channel uses to send and receive packets
Remote LAN Address	Address of the remote LAN device performing the sends and receives

Table 3–21 describes data items displayed in the VC Closures panel, which contains information about the number of times a virtual circuit has closed for a particular reason.

Table 3–21 Data Items in the VC Closures Panel

Data Item	Description
SeqMsg TMO	Number of sequence transmit timeouts
CC DFQ Empty	Number of times the channel control DFQ was empty
Topology Change	Number of times PEDRIVER performed a failover from FDDI to Ethernet, necessitating the closing and reopening of the virtual circuit
NPAGEDYN Low	Number of times the virtual circuit was lost because of a pool allocation failure on the local node

Table 3–22 lists data items displayed in the Packets Discarded Panel, which contains information about the number of times packets were discarded for a particular reason.

Managing DECamds Data Windows

3.15 NISCA Summary Window

Table 3–22 Data Items in the Packets Discarded Panel

Data Item	Description
No Xmt Chan	Number of times there was no transmit channel
Ill Seq Msg	Number of times an illegal sequenced message was received
TR DFQ Empty	Number of times the Transmit DFQ was empty
CC MFQ Empty	Number of times the Control Channel MFQ was empty
Rcv Short Msg	Number of times a short transport message was received
Bad Checksum	Number of times there was a checksum failure
TR MFQ Empty	Number of times the Transmit MFQ was empty
Cache Miss	Number of messages that could not be placed in the cache

3.15.2 Notes About the Display

Following are notes about the display of data in the window:

- No highlighting conventions are used within the NISCA Summary window.
- You cannot sort or filter the data displayed in this window.
- You can change collection intervals.

Performing Fixes

You can perform **fixes** to resolve resource availability problems and improve system availability. However, performing certain actions to fix a problem can have serious repercussions on a system including possibly causing a system failure. Therefore, only experienced system managers should perform fixes.

This chapter covers the following topics:

- Understanding fixes
- Performing fixes
- Typical fix examples

4.1 Understanding Fixes

When DECamds detects a resource availability problem, it analyzes the problem and proposes one or more fixes to improve the situation. Most fixes correspond to an OpenVMS system service call.

The following fixes are available from DECamds:

Fix Category	Possible Fixes	System Service Call
Memory usage fixes	Adjust working set size	\$ADJWSL
	Purge working set	\$PURGWS
Process fixes	Delete a process	\$DELPRC
	Exit an image	\$FORCEX
Process Quota Limit Adjust	Change limits for AST, BIO, DIO, ENQ, FIL, PRC, and TQE process quota limits	none
Process state fixes	Resume a process	\$RESUME
	Suspend a process	\$SUSPND
Process priority fixes	Lower or raise a process priority	\$SETPRI
Quorum fix	Adjust cluster quorum	None
System fix	Crash node	None

Before you perform a fix, you should understand the following information:

- Fixes are optional.
- You must have write access to perform a fix. (See Section 1.3 for more information about DECamds security.)
- You cannot undo many fixes. (After using the crash node fix, for example, the node must be rebooted.)
- The exit image, delete process, and suspend process fixes should not be applied to system processes. Doing so can also require rebooting the node.

Performing Fixes

4.1 Understanding Fixes

- Whenever you exit an image, you cannot return to that image.
- Processes that have exceeded their job or process quota cannot be deleted.
- DECamds ignores fixes applied to the SWAPPER process.

4.2 Performing Fixes

Standard OpenVMS privileges restrict write access of users. When you run the Data Analyzer, you must have the CMKRNL privilege to send a write (fix) instruction to a node with a problem.

To initiate a fix, perform one of the following actions:

- From any of the data windows, double-click on a process, and then choose an action from the Fix menu.
- Click MB3 on an event, and choose Fix from the menu.

DECamds displays a dialog box listing the fixes you can perform for the selected event. The recommended choice is highlighted. When you click on OK or Apply, DECamds performs one of the following actions:

- If the event you selected is not specific to a certain process, DECamds automatically performs the fix. Some fixes are performed automatically when “(automatic)” is displayed next to the selection.
- If the event is specific to a process, DECamds displays another dialog box in which you can specify the fix parameters. For example, for the Adjust Working Set Size fix, you specify a new working set size for the process.

DECamds performs the highlighted fix as long as the event still exists. If the event you are fixing has changed, the dialog box disappears when you click on OK, Apply, or Cancel, and the fix is not performed.

Table 4–1 summarizes all fixes along with the windows from which they are available.

Table 4–1 Summary of DECamds Fixes

Problem to be Solved	Fix	Available From	Effects
Cluster hung	Adjust Quorum	Node Summary	Quorum for cluster is adjusted
Node or process low memory	Purge Working Set	Event Log Memory Summary Single Process Summary	Free memory, initial increment to page fault rate
Node resource hanging cluster	Crash Node	System Overview Node Summary Single Lock Summary	Node crashes with operator requested shutdown
Process looping, intruder	Delete Process	Any process window	Process no longer exists
Process loop in same PC range endlessly	Exit Image Process	Any process window	Exit from current image

(continued on next page)

Table 4–1 (Cont.) Summary of DECamsd Fixes


Problem to be Solved	Fix	Available From	Effects
Process previously suspended	Resume Process	Event Log Memory Summary CPU Summary Process I/O Summary Single Process Summary	Process will start from point it was suspended
Process quota has reached its limit and has entered RWAIT state	Adjust Process Quota Limit	Single Process Summary Event Log	Process receives greater limit
Runaway process	Change Process Priority	CPU Summary Single Process Summary Event Log	Priority stays at selected setting
Runaway process, unwelcome intruder	Suspend Process	Event Log Memory Summary CPU Summary Process I/O Summary Single Process Summary	Process gets no computes
Working set too high or low	Adjust Working Set Size	Memory Summary Single Process Summary Event Log	Page faulting might occur, might take up too much memory

The following sections in this chapter provide reference information about each DECamsd fix.

4.2.1 Adjust Working Set Fix

When you perform the Adjust Working Set fix, DECamsd displays a dialog box similar to the one shown in Figure 4–1.

Figure 4–1 FIX Adjust Working Set Size Dialog Box

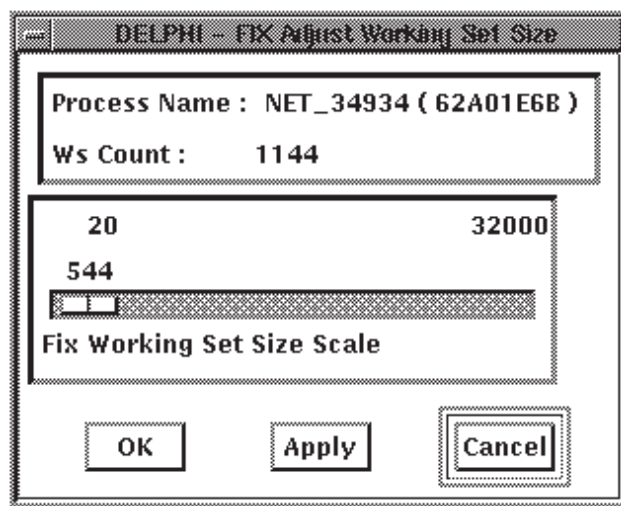

ZK-7953A-GE

Adjusting the working set can give needed memory to other processes that are page faulting. The adjustment made should attempt to bring the working set size closer to the actual count being used by non-page faulting processes.

Performing Fixes

4.2 Performing Fixes


Caution

If the automatic working set adjustment is enabled for the system, a fix to Adjust Working Set will disable the automatic adjustment for the process.

4.2.2 Change Process Priority Fix

When you perform the Change Process Priority fix, DECamds displays a dialog box similar to Figure 4-2.

Figure 4-2 FIX Process Priority Dialog Box

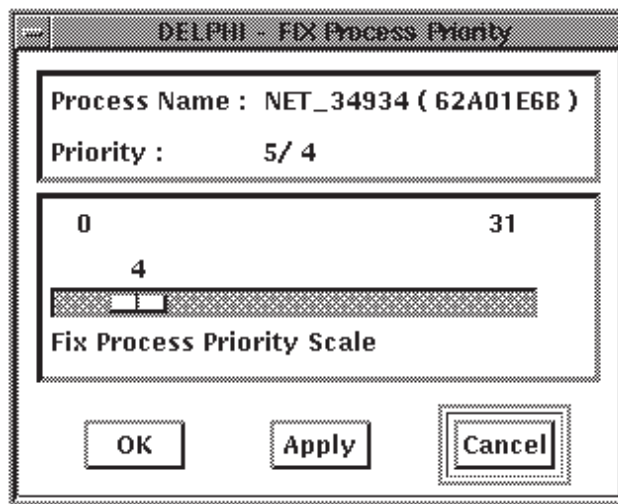


ZK-7972A-GE

Setting a priority too high for a compute-bound process allows it to consume all the CPU cycles on the node, which can affect performance dramatically. On the other hand, setting a priority too low prevents the process from getting enough CPU cycles to do its job, which can also affect performance.

4.2.3 Crash Node Fix

When you perform the Crash Node fix, DECamds displays a dialog box similar to Figure 4-3.

Figure 4–3 FIX Crash Node Dialog Box

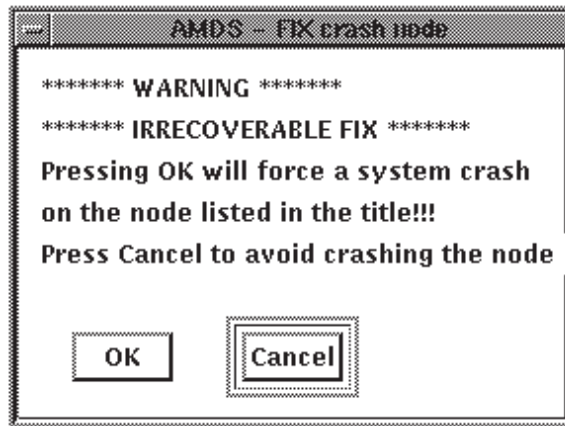

ZK-7954A-GE

Caution


The crash node fix is an operator-requested bugcheck from the driver. It happens immediately when you click on OK in the Fix Crash Node dialog box. After performing this fix, the node cannot be restored to its previous state. After a crash, the node must be rebooted.

4.2.4 Exit Image and Delete Process Fixes

This section describes the Process State fixes.

When you perform either the Exit Image or Delete Process fix, DECamds displays a dialog box similar to Figure 4-4.

Figure 4–4 FIX Process State Dialog Box — Exit Image or Delete Process

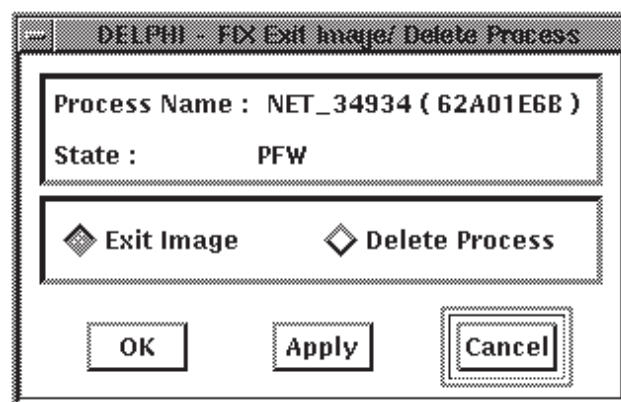

ZK-7971A-GE

You cannot reverse the action when you delete a process that is in a resource wait state. You must reboot the node. Deleting a process on a node that is in a resource wait state might not have an effect on the process.

Performing Fixes

4.2 Performing Fixes

Exiting an image on a node can stop an application that is required by the user. Check the single process window first to determine what image it is running.


Caution

Deleting or exiting a system process could corrupt the kernel.

4.2.5 Purge Working Set Fix

When you perform the Purge Working Set fix, DECamds displays a dialog box similar to Figure 4-5.

Figure 4-5 FIX Purge Working Set Dialog Box

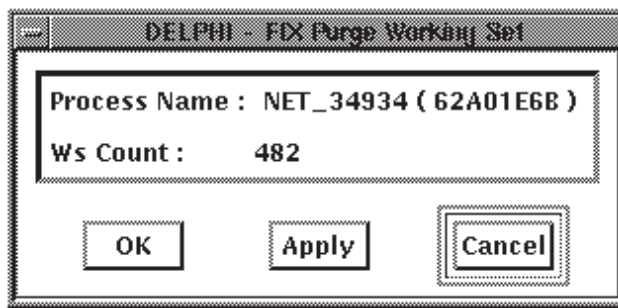


ZK-7973A-GE

Continual purging of a working set on a node could force excessive page faulting, which affects system performance.

4.2.6 Suspend Process and Resume Process Fixes

When you perform either the Suspend Process or Resume Process fix, DECamds displays a dialog box similar to the one shown in Figure 4-6.

Figure 4-6 FIX Process State Dialog Box — Suspend or Resume Process

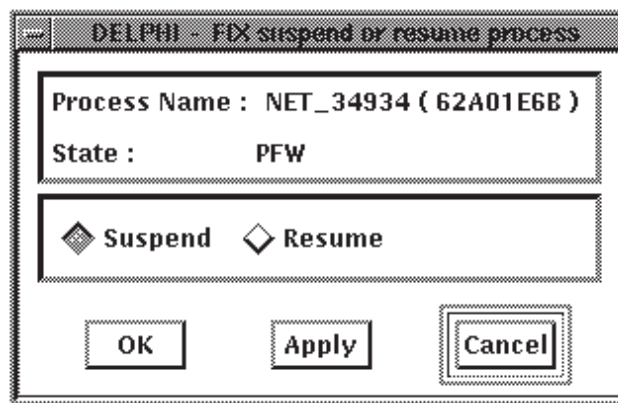

ZK-7955A-GE

Suspending a process that is consuming excess CPU time can improve perceived CPU performance by freeing the CPU for use by other processes. Conversely, resuming a process that was using excess CPU time while running, may reduce perceived CPU performance.

Caution

Do not suspend system processes, especially JOB_CONTROL.

4.3 Examples for Fixing Low Memory Availability

This section describes two approaches for solving a low memory problem, which is a common resource availability problem.

The first example uses DECamds default settings. The second example shows how you can use DECamds to make a more detailed analysis and investigation. Both examples begin at the Event Log window entry.

4.3.1 Performing a Fix Using Automatic Fix Settings

When a process is page faulting, for example, it may signal a problem of available memory. A low memory (LOMEMY) event is generated. To fix this problem, you should purge the working sets of inactive processes. This will free up memory for the process that is page faulting. DECamds offers a quick, direct way to fix this and similar problems by performing the following steps:

1. Click MB3 on the event and choose Fix.

If the event is related to a specific process, DECamds displays a dialog box with fixes you can perform. If the event is not related to a specific process but may be related to more than one process, DECamds automatically performs the fix.

In the low memory example, DECamds displays a dialog box suggesting the automatic Purge Working Set fix.

2. Click on OK or Apply to perform the fix.

The Purge Working Set fix purges the working set of the five processes that are the highest consumers of memory and are not page faulting. If this fix is not sufficient and the low memory event entry returns, repeat the fix every 15 or 20 seconds until enough working sets are purged to eliminate the event message. If two or three purges are not sufficient, then you should investigate manually.

4.3.2 Performing a Fix Using Manual Investigation

DECamds lets you manually display additional information related to an event before performing a fix. The following example uses the same low memory problem described in the previous section to investigate and select specific fixes for the problem.

For this example, manually select the processes you want to fix from the Memory Summary window. You also may want to refer to data in the CPU Summary window.

To investigate the low memory event before fixing it, perform the following steps:


1. Click MB3 on the event to display the menu and choose Display.

Performing Fixes

4.3 Examples for Fixing Low Memory Availability

DECamds displays a dialog box with a window name highlighted to indicate the recommended path for information. In the example shown in Figure 4-7, the Memory Summary window is recommended.

Figure 4-7 Sample Fix Dialog Box

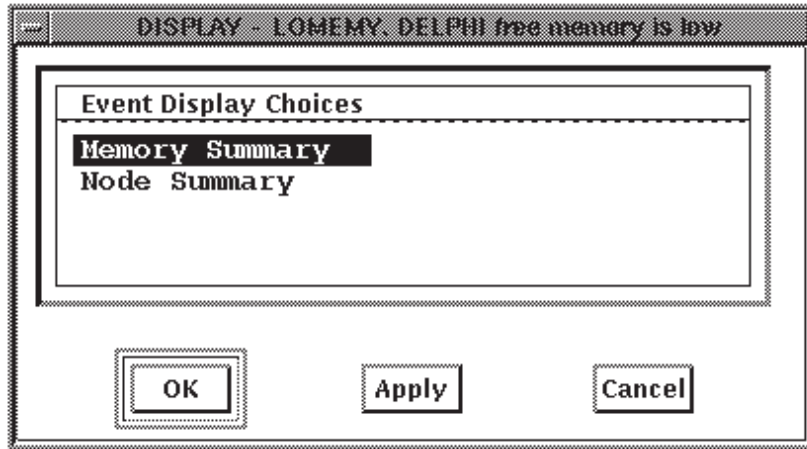

ZK-7958A-GE

- Click on Apply to open the Memory Summary window shown in Figure 4-8 and keep the dialog box.

Figure 4-8 DECamds Memory Summary Window

PID	Process Name	Count	Working Set		Page Fault		I/O
			Size	Extent	Rate		
62A0E8C1	UCK\$BOOT_BG6112	774	1144	32000	0.80	0.05	
62A0E8B4	BATCH_2878	2537	3394	32000	0.00	0.00	
62A0E8BB	REINER_1	1032	1448	32004	0.00	0.00	
62A0E873	_RTA57:	1235	1744	32000	0.00	0.00	
62A0E86B	YURYAN	5233	6994	32000	0.00	0.00	
62A0E85E	CWINSOR	740	994	32000	0.00	0.00	
62A0E83A	ABRAMSON	1028	1444	32000	0.00	0.00	
62A0E802	TGOODWIN_2	5576	9548	32004	0.00	0.00	
62A0E61D	TGOODWIN_1	8542	11498	32004	35.44	0.00	
62A0E614	DECW\$TE_E614	831	6094	32000	0.00	0.00	
62A0E611	... the Giant!	2469	3544	32000	0.01	0.00	
62A0E58B	FAL_31989	234	844	32000	0.00	0.00	

ZK-7959A-GE


- To determine which process consumes the most memory and is not page faulting, you can sort and examine the data in the Memory Summary window. In this example, the process DECW\$SERVER_0 is consuming the most memory and not page faulting.

Performing Fixes

4.3 Examples for Fixing Low Memory Availability

4. Select the Node Summary window from the Low Memory dialog box and click on Apply to display the window. DECams displays a window similar to Figure 4-9.

Figure 4-9 DECams Node Summary Window

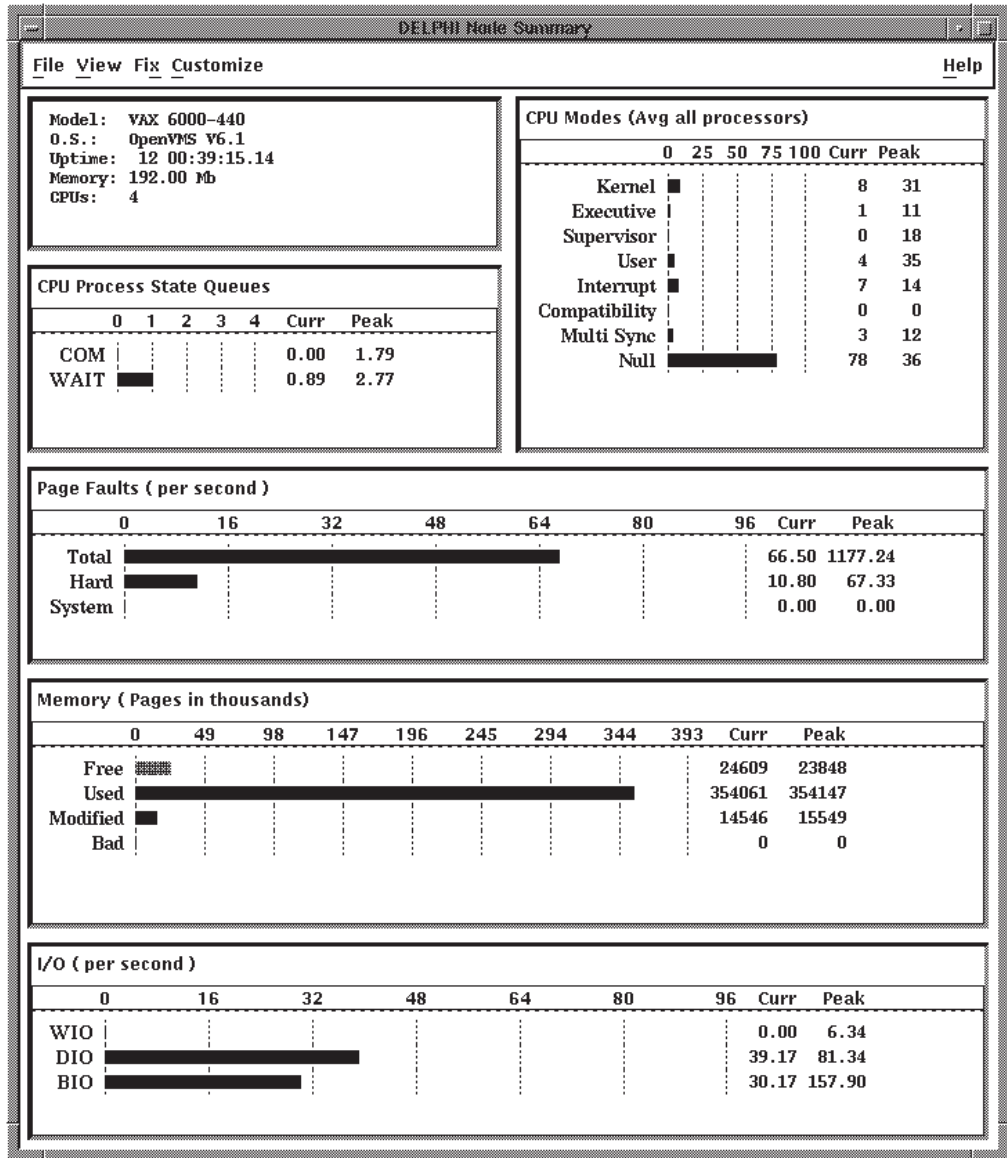

ZK-7962A-GE

- The Node Summary window in Figure 4-9 confirms there is little free memory available. (The Node Summary window also can show other activity relevant to diagnosing the problem such as high page faults.)
5. Purge the working sets. You choose which process's working sets are to be purged by performing the following steps:
 - a. In the Memory Summary window, select any process, click MB3 on the count field, and choose Fix from the menu.
 - b. Click on OK or Apply in the Fix dialog box.


Customizing DECams

This chapter describes how to organize data collection, analysis, and display by filtering, sorting, and customizing DECams. It also describes how some of these tasks can optimize the performance of DECams.

5.1 Customizing DECams Defaults

To set DECams application values such as bar graph colors and automatic collection options, choose DECams Customizations from the Customize menu of the Event Log or System Overview windows. DECams displays the DECams Applications Customizations dialog box as shown in Figure 5-1.

Figure 5-1 DECams Application Customizations Dialog Box

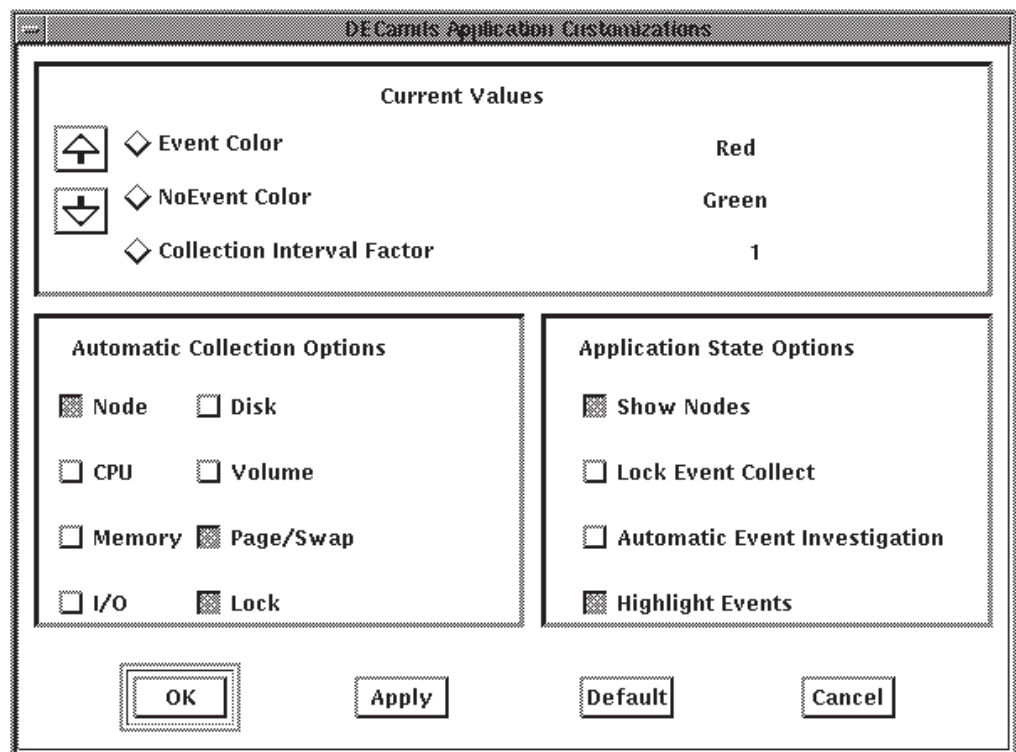

ZK-7938A-GE

Table 5-1 lists the items you can customize.

To save your changes from use to use, choose Save DECams Customizations from the Customize Menu of the Event Log or System Overview window. The changes are stored in the AMDS\$APPLIC_CUSTOMIZE.DAT file.

Customizing DECamds

5.1 Customizing DECamds Defaults

Note

Subsequent installations of DECamds will not overwrite existing customization files. The installation procedure will check for the existence of each of the customization files. If found, the procedure will provide the new file with the .TEMPLATE file extension. The installer must check the new .TEMPLATE files for new features implemented in future releases; any changes will be stated in the online release notes in the following location:

`SYS$HELP:AMDS070.RELEASE_NOTES`

Table 5–1 DECamds Application Defaults

Field	Default	Function
Current Values		
Event Color	Red	Specifies the bar graph color used for signaled events.
No Event Color	Green	Specifies the bar graph color used for non-signaled events.
Collection Interval Factor	1	This value is multiplied by a window's collection interval definition. Used to force windows to have longer time spans between data collection. Increasing this number decreases the use of the Data Analyzer's CPU and LAN.
Automatic Collection Options		
CPU	Off	Do not automatically collect CPU data at startup.
Disk	Off	Do not automatically collect disk data at startup.
I/O	Off	Do not automatically collect I/O data at startup.
Memory	Off	Do not automatically collect memory data at startup.
Node	On	Collect node data at startup.
Page/Swap	On	Collect page and swap data at startup.
Lock	On	Collect lock contention data at startup.
Volume	Off	Do not automatically collect volume data on startup.
Application State Options		
Show Nodes	On	Determines whether the System Overview window starts up with individual node names displayed.
Lock Event Collect	Off	Determines whether DECamds automatically collects additional data about all the processes waiting for a locked resource.
Automatic Event Investigation	Off	Determines whether additional data is collected when DECamds detects an event.
Highlight Events	On	Determines whether event-related data is highlighted.

5.1.1 Setting Default Data Collection

By default, DECamds collects the following categories of data when started: Node Summary, Page/Swap File Summary, and Lock Contention Summary.

You can change the default amount of data collected when DECamds starts by choosing Customizations from the Customize menu in the Event Log or System Overview window. The DECamds Application Customizations dialog box appears and you can click on the Automatic Collection Options buttons to select or disable the categories you want. To save the settings for the next time you run DECamds, choose Save DECamds Customizations from the Customize menu.

5.1.2 Setting Automatic Event Investigation

Automatic Event Investigation enhances the speed with which you can pursue a specified event. When this option is enabled, DECamds automatically collects follow-up data on the event. When this option is disabled, you must initiate follow-up data collection when an event occurs.

To enable automatic event investigation, choose Enable Automatic Event Investigation from the Control menu of the System Overview or Event Log window. To disable it, choose the Disable Automatic Event Investigation menu item.

You also can set Automatic Event Investigation by choosing Customizations from the Customize menu, then click on the Automatic Event Investigation button in the resulting DECamds Application Customizations dialog box. To save the settings for the next time you run DECamds, choose Save DECamds Customization from the Customize menu.

Note

Enabling this option can significantly increase CPU, memory, and LAN traffic load. By default, DECamds does not automatically investigate events that might require attention.

Also, automatic investigation applies only to events that are detected after you enable the option. It does not apply to lock-related events. To control automatic investigation for lock-related events, use the DECamds Customizations dialog box.

5.1.3 Setting Automatic Lock Investigation

With Automatic Lock Investigation, the Data Analyzer automatically investigates any signalled Lock Contention events. Setting this option allows you to determine more quickly the blocking lock in a resource contention situation.

Note

This option sometimes uses more DECamds memory, CPU, and LAN bandwidth to investigate locks that are very transient.

To enable automatic investigation of locks, click on the Lock Event Collect button in the DECamds Application Customization dialog box.

Customizing DECamds

5.2 Filtering Data


5.2 Filtering Data

DECamds can collect and display every event regardless of how important or unimportant an event is to you. However, you can narrow the focus so that the events that you want to see are displayed. You can use the following methods to determine which events qualify for your attention:

- Filter all events on a global severity basis. For example, you might not want to see any event that has less than a 40 severity value.
- Define specific event criteria. For example, you can refine the global filtering by also defining that DSKRWT event (high disk device Rwait count) must pass your specifications before being considered an event worth displaying or logging.

Figure 5-2 shows the process an event must pass through to qualify as important enough to be logged or displayed for your attention.

Figure 5–2 Event Qualification

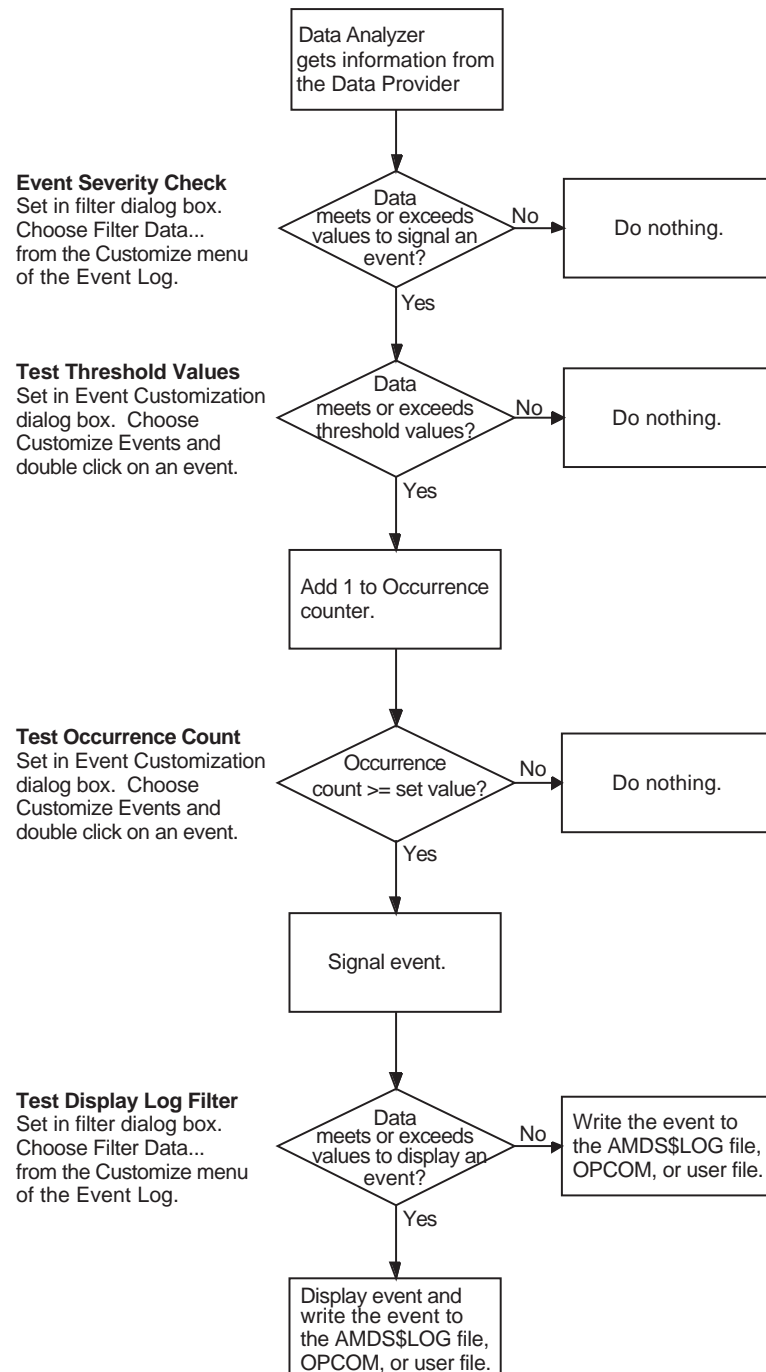

ZK-7949A-GE

5.2.1 Filtering Events

To determine the events to be displayed, perform the following steps:

1. Choose Filter Data... from the Customize menu. A filter dialog box appears. You can filter data in the following data windows:

CPU Summary
Lock Contention Summary

Customizing DECamds

5.2 Filtering Data


Memory Summary
Process I/O Summary
Disk Status Summary
Volume Summary
Page/Swap File Summary

The filter dialog box has the following modifiable options:

- **Severity** — Determines the severity value at which DECamds writes an event in the Event Log window. Only events that meet or exceed this value are displayed in the Event Log window. Increasing this value reduces the number of event messages in the Event Log window and can improve perceived response time.
 - **Event Signal** — Determines the severity value at which DECamds signals an event for attention. Only events that qualify are passed on to be checked by any filters you may set for a specific event. Increasing this value reduces the number of event messages that need to be tested to see if further attention is warranted and can improve perceived response time.
2. Modify the settings, which will apply to the current session. To save these settings from session to session, choose **Save Filter Changes** from the **Customize** menu in the Event Log window.

Figure 5–3 shows the CPU Summary Filtering dialog box. For a process to be displayed using the CPU Summary window shown in Figure 5–3, it must have a Current Priority of 5 or more, a CPU Rate of 2.5 or more, and be in any of the process states indicated except HIB or HIBO. No other processes are displayed.

Figure 5–3 CPU Summary Filtering Dialog Box

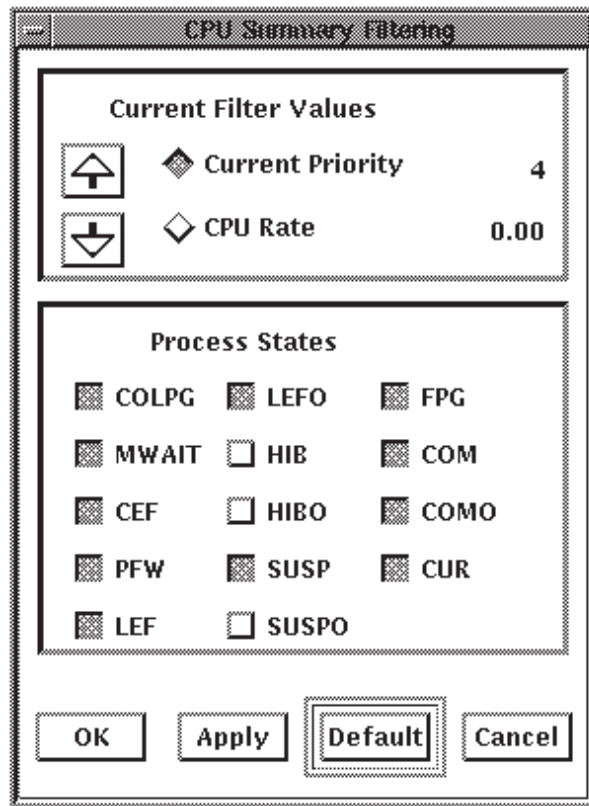

ZK-7943A-GE

If the Enable Highlighting option is on, any process that signals an event is included in the display, regardless of whether it meets the filter criteria.

To change the value of a filter, click the filter button on, and then click the up or down arrow. Click on OK or Apply for the filter to take effect. To return to system default values, click on Default.

Changing a Filter Category

Some data windows also allow you to filter data by category. For example, in the CPU Summary window, you also can filter by the Process State category to display only processes in certain states. Category buttons that are selected display the associated information.

In the CPU Summary window, to display only inactive processes, select the HIB and HIBO buttons under Process States, and deselect all other process states. When you click on OK or Apply, only inactive processes appear in the CPU Summary window.

5.2.2 Customizing Events


You can define criteria by which specific events are qualified for your attention. For example, you can refine the global filtering by also defining that DSKRWT event (high disk device Rwait count) must pass your specifications before being considered an event worth displaying or logging. To define specific event criteria, perform the following steps:

Customizing DECamds

5.2 Filtering Data

1. Choose Customize Events from the Customize menu in the Event Log window. Figure 5-4 shows the Customize Events dialog box that appears.

Figure 5-4 Customize Events Dialog Box

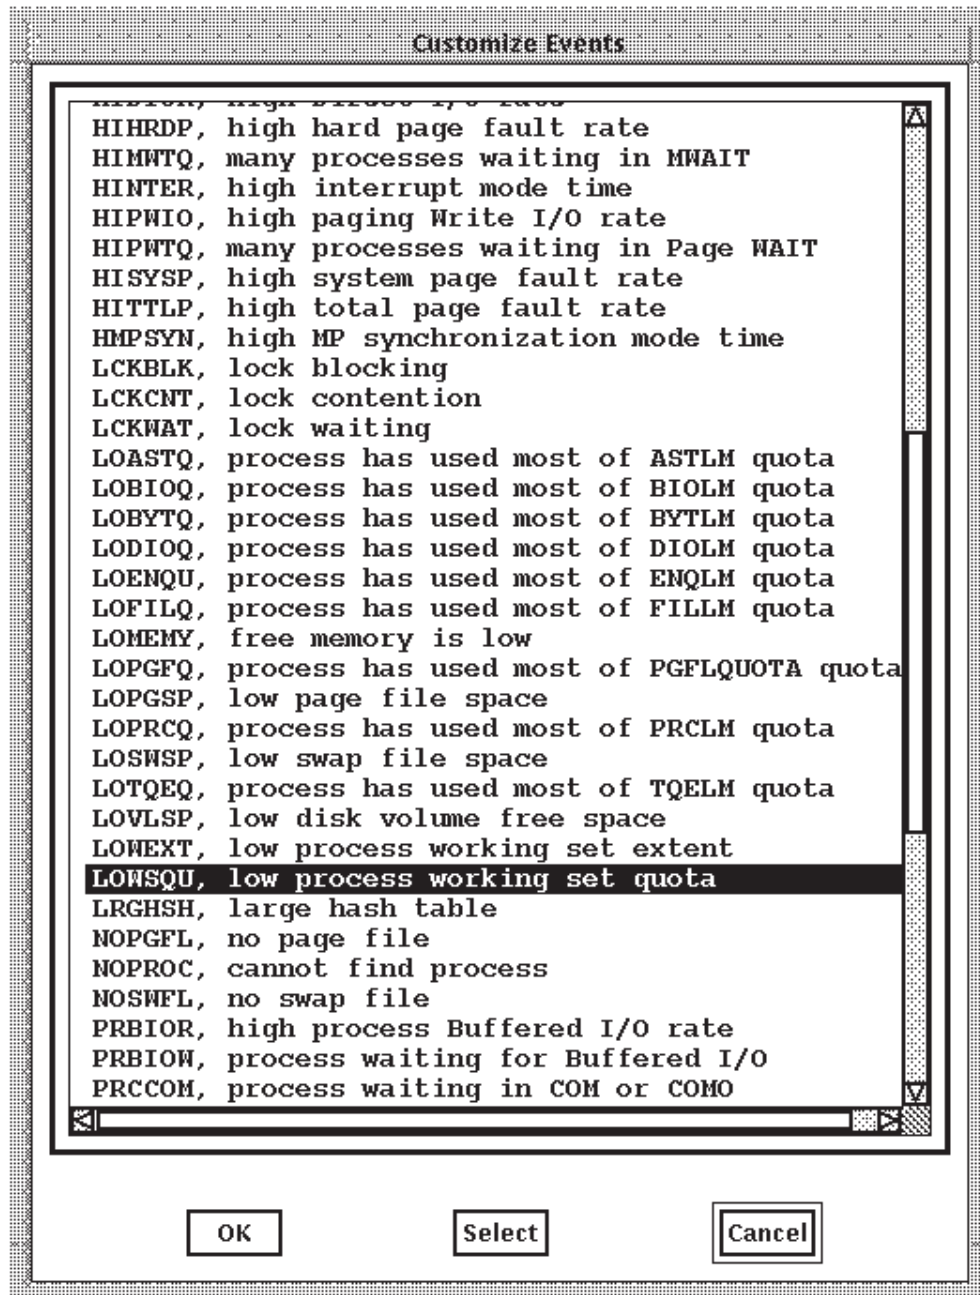

ZK-7944A-GE

2. Double-click on an event that you want to customize. A dialog box appears with the event you select. The dialog box also contains an explanation of what might cause this event to occur. Figure 5-5 shows the LOWSQU Event Customization window.

Figure 5-5 LOWSQU Event Customization Window

LOWSQU, low process working set quota



Event Format: LOWSQU, <node> <process> working set quota is too small
 Signaled From: Memory or Single Process Summary
 Event Class Type: Memory
 Event Description

The process page fault rate exceeds the threshold and the percentage of Working Set Size to Working Set Quota exceeds the threshold.

Event Investigation Hints

This event indicates the process needs more memory, but may not be able to get it due to either the WSQUO value in the UAF file being set too low for size of memory allocation requests or the system is memory constrained.

Event Customize Options

	◆ Severity	40
	◆ Occurrence	3
	◆ Class	N/A
	◆ Threshold 1 50	Page faults per second
	◆ Threshold 2 150.000	Percent WSQuota over WSCount

Select value, then either use arrows to change value
 or input new value and 'Apply' or 'OK' the change:

Event Escalation Action Options

◆ OPCOM ◆ USER ◆ NONE

Type in procedure to be run (e.g., amds\$system:amds\$event_mail_sample.com)

ZK-7945A-GE

Figure 5-5 shows the values you can set in any Event Customization window. To change the value of an option, click on an option and then use the arrow buttons to increase or decrease the value. A higher number indicates a more severe event.

Customizing DECamds

5.2 Filtering Data

3. Modify the settings that will apply to the current session. To save these settings from session to session, choose Save Event Customizations from the Customize menu in the Event Log window.

The following sections describe the event customization options.

Severity Option

Severity is the relative importance of an event. Events with a high severity must also exceed threshold settings before an event can be signaled for display or logging.

Occurrence Option

Each DECamds event is assigned an **occurrence** value, that is, the number of consecutive data samples that must exceed the event threshold before the event is signaled. By default, events have low occurrence values. However, you might find that a certain event only indicates a problem when it occurs repeatedly for an extended period. You can change the occurrence value assigned to that event so that DECamds signals it only when necessary.

For example, suppose page fault spikes are common in your environment, and DECamds frequently signals intermittent *HITTLP, total page fault rate is high* events. You could change the event's occurrence value to 3, so that the total page fault rate must exceed the threshold for three consecutive collection intervals before being signaled to the Event Log.

To avoid displaying insignificant events, you can customize an event so that DECamds signals it only when it continuously occurs.

Automatic Event Investigation (see Section 5.1.2) uses the Occurrence value to determine when to further investigate an event. When enabled, the automatic event investigation is activated when the Occurrence count is three times the Occurrence setting value.

Class Option

You can customize certain events so that the event threshold varies depending on the class of computer system the event occurs on. This feature is particularly useful in environments with many different types and sizes of computers.

By default, DECamds uses only one default threshold for each event, regardless of the type of computer the event occurs on. However, for certain events (in particular, CPU, I/O, and memory usage events) the level at which resource use becomes a problem depends on the size and type of computer. For example, a page fault rate of 100 may be important on a VAXstation 2000 system but not on a VAX 7000 system.

DECamds provides three additional predefined classes for CPU, I/O, and Memory-related events. You can specify threshold values for each class in addition to the default threshold for an event. To specify an additional event threshold for each class, edit the file `AMDS$THRESHOLD_DEFS.DAT` located in the `AMDS$CONFIG` directory. An example is provided at the end of this section.

Table 5-2 defines CPU, I/O, and Memory classes.

Table 5–2 CPU, I/O, and Memory Class Definitions

Class ¹	Description
CPU Classes	
Class 1	All VAXft systems, VAXstation/VAXserver 4000, MicroVAX 4000
Class 2	Higher VUP workstations: VAXstation/VAXserver 3100-M76, MicroVAX 3100-M76, MicroVAX 3100-8*, VAXstation 3100-9*, MicroVAX 3100-9*, VAXstation 4000-9*
Class 3	VAX/VAXserver 6000, 7000, 9000, 10000
Class 4	All Alpha systems
I/O Classes	
Class 1	All VAX systems, All VAXft systems, VAXstation/VAXserver 4000, MicroVAX 4000
Class 2	Higher VUP workstations: VAXstation/VAXserver 3100-M76, MicroVAX 3100-M76, MicroVAX 3100-8*, VAXstation 3100-9*, MicroVAX 3100-9*, VAXstation 4000-9*
Class 3	VAX/VAXserver 6000, 7000, 9000, 10000
Class 4	All Alpha systems
Memory Classes	
Class 1	Systems with less than or equal to 24 MB of memory
Class 2	Systems with more than 24 MB and less than or equal to 64 MB of memory
Class 3	Systems with more than 64 MB of memory
Class 4	All Alpha systems

¹If no class is defined, DECamds uses the default threshold value.

You can specify class-based thresholds only for the following events:

- CPU-related events:
 - HINTER, *node* interrupt mode time is high
 - HICOMQ, *node* many processes waiting for CPU
 - HMPSYN, *node* MP synchronization mode time is high
 - HIPWTQ, *node* many processes waiting in COLPG, PFW, or FPG
 - HIMWTQ, *node* many processes waiting in MWAIT
- I/O-related events:
 - HIBIOR, *node* buffered I/O rate is high
 - HIDIOR, *node* direct I/O rate is high
 - HIPWIO, *node* paging write I/O rate is high
- Memory-related events:
 - LOMEMY, *node* free memory is low
 - HIHRDP, *node* hard page fault rate is high
 - HISYSP, *node* high system page fault rate

Customizing DECamsds

5.2 Filtering Data

- HITTLP, *node* total page fault rate is high
- RESPRS, *node* resource hash table sparse
- RESDNS, *node* resource hash table dense

As an example of setting a class-based threshold, the *HITTLP, total page fault rate is high* event is a memory-related event, so the thresholds are based on the memory class definitions shown in Table 5–2. The default threshold for this event is 20 page faults per second. A page fault rate of 20 may be important on a VAXstation 2000 system but it is not important on a VAX 7000 system. To account for this, you can specify the following additional thresholds for the *HITTLP, total page fault rate is high* event:

Class	Threshold	Description
1 (systems with less than or equal to 64 MB of memory)	20	Event is triggered at the default threshold of 20 page faults per second.
2 (systems with 24 MB to 64 MB of memory)	40	Event is triggered at 40 page faults per second.
3 (systems with more than 64 MB of memory)	100	Event is triggered at 100 page faults per second.
4	100 (Alpha systems)	Event is triggered at 100 page faults per second

Threshold Options

Threshold values are compared to an event's description to determine whether an event meets the criteria for display or log. Threshold values are used in conjunction with the Occurrence and severity values. Increasing event threshold values can reduce CPU use and improve perceived response time because more instances must occur for the threshold to be crossed, so fewer thresholds are crossed and fewer events are triggered.

Note

Setting a threshold too high could mask a serious problem.

You can read a description of an event by choosing *Customize Events* from the *Customize* menu in the *Event Log* window, then double-clicking on the event. The event customization dialog box displays an *Event Description* field.

Most events are checked against only one threshold; however, some have dual thresholds, where the event is triggered if either one is true. For example, for the *LOVLSP, node disk volume free space is low* event DECamsds checks both of the following thresholds:

- Number of blocks remaining (*LowDiskFreeSpace.BlkRem*)
- Percentage of total blocks remaining (*LowDiskFreeSpace.Percent*)

Note

Events with both high severity and threshold values are signaled to the operator communication manager (OPCOM). For more information about signaling events to OPCOM, see Section 2.3.3.

5.3 Sorting Data


Choose Sort Data... from the Customize menu to change the order of the information displayed in a window. A dialog box appears in which you can specify sort criteria. All sort criteria must be met for a process to be displayed.

You can sort data in the following windows:

- CPU Summary
- Disk Status Summary
- Volume Summary
- Event Log
- Lock Contention Summary
- Memory Summary
- Page/Swap File Summary
- Process I/O Summary

Figure 5-6 shows a sample Memory Summary Sorting dialog box.

Figure 5-6 Memory Summary Sorting Dialog Box

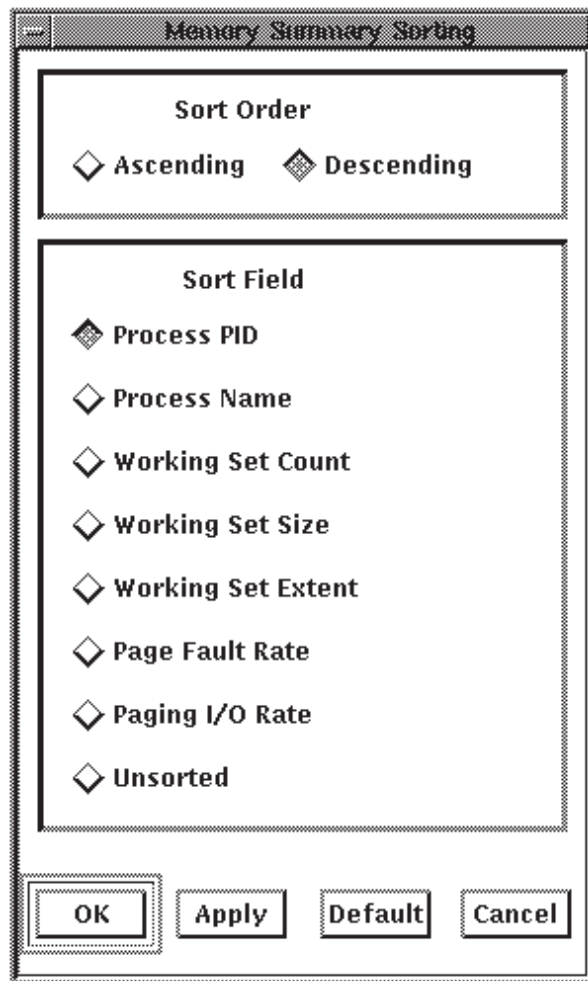

ZK-7961A-GE

Customizing DECamds

5.3 Sorting Data

Sorting is based on two variables: the sort field and the sort order. You can choose only one sort criterion for each variable. For example, to sort Memory Summary data to list the processes with the highest page fault rates first, perform the following steps:

1. Choose Sort Data... from the Customize menu on the Memory Summary window. The Memory Summary Sorting dialog box appears; current sort field settings are displayed. (By default, DECamds sorts Memory Summary data on the Working Set Count field in descending order.)
2. Change sort settings by choosing Page Fault Rate and Ascending order.
3. Click on OK or Apply.

5.4 Setting Collection Intervals


A **collection interval** is the time the Data Analyzer waits before requesting more information from Data Provider nodes. Changing the collection interval helps you control the performance of DECamds and its consumption of system resources.

The frequency of polling remote nodes for data (collection intervals) can affect perceived response time. You want to find a balance between collecting data often enough to detect potential resource availability problems before a node or cluster experiences a severe problem, and seldom enough to optimize perceived response time. Increasing the collection interval factor decreases CPU consumption and LAN load, but response time might appear slower.

Collection intervals do not affect memory use.

To change a collection interval, choose Collection Interval from the Customize menu. Figure 5-7 shows a sample Memory Summary Collection Interval dialog box.

Figure 5-7 Memory Summary Collection Interval Dialog Box

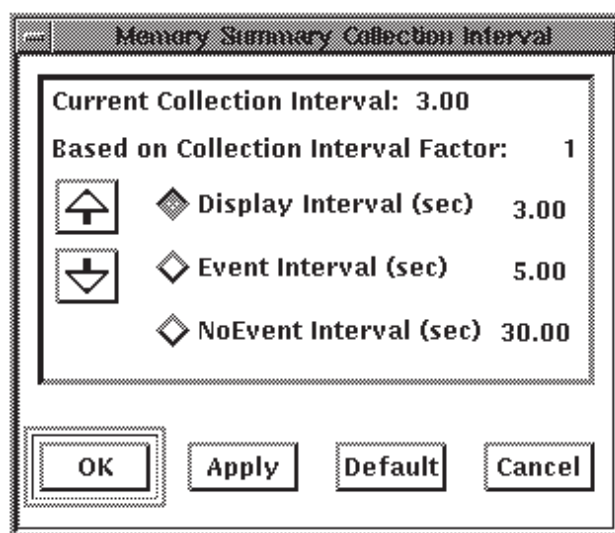

ZK-7939A-GE

Customizing DECamds

5.4 Setting Collection Intervals

Table 5–3 describes the fields on the Memory Summary Collection Interval dialog box.

Table 5–3 Memory Summary Collection Interval Fields

Current Collection Interval	Displays the number of seconds between requests for data. You can change the value for all collection intervals for all windows by choosing DECamds Customizations from the Customize menu of the Event Log or System Overview window. The DECamds Application Customizations dialog box appears and you can increase or decrease the collection interval factor.
Based on Collection Interval Factor	Displays the number with which the collection interval is multiplied.
Display Interval (sec)	Displays the collection interval for displaying data in a window. You can change the interval by clicking on the up or down arrows in the dialog box.
Event Interval (sec)	Displays the collection interval used when events are found. This value is used by default when you start background collection. You can change the interval by clicking on the up or down arrows in the dialog box.
NoEvent Interval (sec)	Displays the collection interval when no events are found. You can change the interval by clicking on the up or down arrows in the dialog box.

To apply the changes, click on OK or Apply. To change back to DECamds default values for the window, click on Default. To exit without making any changes, click on Cancel.

Table 5–4 lists the default window interval values (in seconds) provided with DECamds for each window type.

Table 5–4 Default Window Collection Intervals

Window	Display ¹	Event ¹	No Event ¹
CPU Modes Summary	5.0	5.0	5.0
CPU Summary	5.0	10.0	30.0
Disk Status Summary	30.0	15.0	60.0
Volume Summary	15.0	15.0	120.0
Lock Contention	10.0	20.0	60.0
Memory Summary	5.0	10.0	30.0
Node Summary	5.0	5.0	10.0
Page/Swap File Summary	30.0	30.0	2400.0
Process Identification Manager ²	60.0	60.0	240.0
Process I/O Summary	10.0	10.0	30.0
Single Lock Summary	10.0	10.0	20.0
Single Process Summary	5.0	5.0	20.0

¹All times are in seconds and cannot go below .5 seconds.

²Process Identification Manager supports the CPU, Memory, Process I/O, and Single Lock Summary window sampling.

Customizing DECamds

5.5 Optimizing Performance with System Settings

5.5 Optimizing Performance with System Settings

DECamds is a compute-intensive and LAN traffic-intensive application. At times, routine data collection and display activities can cause a delay in perceived response time.

This section explains how to optimize perceived response time based on actual measurements of CPU utilization rates (throughput). Performance improvements can be made in the following areas:

- DECamds software
- System settings
- Hardware configuration

Site configurations vary widely and no rules cover all situations but the information in this section can help you make informed choices about improving your system performance. The following factors affect perceived response time:

- Load on monitored nodes including applications and peripherals (especially number of disks)
- Number of monitored nodes and users
- Size of operating system tables and lists on monitored nodes (process and lock)
- Version of operating system running on monitored nodes
- LAN traffic, cluster communications, nodes booting, and network-based applications and tools

When DECamds starts, it polls the local area network (LAN) to locate all nodes running the DECamds Data Provider, creates a communications link, and collects data from each Data Provider node on the LAN. (See Section 1.3 for more information about establishing a communications link between nodes.)

The initial polling process creates a short-term high load of CPU and LAN activity. After establishing a communications link with other nodes, DECamds reduces polling frequency, thereby reducing the CPU and LAN load.

Note

Each request to collect a new category of data increases memory and LAN requirements. Memory requirements vary with the number of categories collected and the number of nodes being polled.

Polling frequency does not affect memory because polling only changes how frequently existing data is replaced with updated data.

Using DECamds to observe nodes or to take corrective action can affect performance. The following sections describe how you can improve perceived response time.

The following sections also describe system settings that you can make to improve the ability of DECamds to handle the data collection demands.

5.5.1 Setting Process Quotas

To improve the performance of DECamds, you may need to change process quotas, using the following steps:

1. Increase the process quotas assigned to the process initiating DECamds in the system's user authorization file (UAF). The quotas used extensively by DECamds are ASTLM, TQELM, BIOLM, BYTLM, and WSEXTENT. The values in the installation guide are suggestions for a 50-node cluster. The following process quotas are recommended:

Quota	Recommended Value ¹
ASTLM	4 times the node count
TQELM	4 times the node count
BIOLM	2 times the node count
WSEXTENT	350 times the node count
BYTLM	1500 times the node count

¹*node count* is the number of nodes a Data Analyzer monitors simultaneously.

2. Log out, log back in, and restart DECamds.

5.5.2 Setting LAN Load

The maximum size for data packets is 1500 bytes. When the amount of data is greater than 1500 bytes, DECamds must send multiple requests to complete the data collection request.

Table 5–5 shows the LAN load for various levels of collection intervals and data collection. You can modify a data collection window's collection intervals (as explained in Section 5.4) or reduce the scope of data collection (as explained in Section 5.1.1) to reduce LAN activity.

Table 5–5 LAN Load

Data	Outgoing Packet Size (in bytes) on Alpha	Outgoing Packet Size (in bytes) on VAX	Return Packet Size (in bytes)
Configuration data	129	285	88
CPU Modes	201	129	48 + (64* no. of processors)
CPU Summary	178	171	16 per active process
Disk Status Summary	473	473	56 per disk
Fix	24	24	12
Hello message	N/A	N/A	32
Lock Contention	240	240	76 per resource
Memory Summary	275	275	36 per active process
Node Summary	319	241	48 + (64 * no. of processors)
Page/Swap File	208	208	46 per page/swap file

(continued on next page)

Customizing DECamsds

5.5 Optimizing Performance with System Settings

Table 5–5 (Cont.) LAN Load

Data	Outgoing Packet Size (in bytes) on Alpha	Outgoing Packet Size (in bytes) on VAX	Return Packet Size (in bytes)
Process I/O Summary	236	229	32 per active process
Single Lock (Waiting)	272	272	32 per waiter
Single Process Summary	491	471	00
Volume Summary	430	430	28 per disk

5.5.3 Setting Data Link Read Operations

Increase read operations to the data link by changing the logical name `AMDSS$COMM_READS` in the `AMDSS$CONFIG:AMDSS$LOGICALS.COM` command procedure. The `AMDSS$COMM_READS` logical name controls the number of requests for data (read operations) queued to the data link.

If you increase data collection, increase the number of requests that can be queued. Digital recommends two for each node being monitored. Each read operation queued requires 1500 bytes of `BYTLM` quota.

5.5.4 Setting the Communications Buffer

Increase the communications buffer by changing the logical name `AMDSS$COMM_BUFFER_SIZE` in the `AMDSS$CONFIG:AMDSS$LOGICALS.COM` command procedure. The buffer controls the size of the global section used for communication between the collector node and the communications process.

When DECamsds cannot keep up, you will receive the following warning message:

```
AMDSS$_COMMBUFOVF---communications buffer overflow. Increase the buffer by 25 percent.
```

In addition to increasing the value of the `AMDSS$COMM_BUFFER_SIZE` logical name, set the system parameter `GBLPAGFIL` on the collector node to cover the increase. This adds to the amount of data collection that DECamsds can perform.

The value of the `GBLPAGFIL` system parameter must always be higher than the number of `FREE_GBLPAGES`. To determine the value of `FREE_GBLPAGES`:

```
$ A = F$GETSYI("FREE_GBLPAGES")
$ SHO SYM A
```

The value of `A` must conform to the formula:

$$2 * ((\text{buffer_size} / 512) + 512)$$

5.5.5 Setting Window Customizations

The Sort, Filter, and collection interval settings at the data window level affect performance. Follow these guidelines to balance customization with performance:

- **Sorting** — Use unsorted windows to improve performance. Sorting requires extra computations.
- **Changing window filters** — Filter out data to improve CPU performance. Reducing the collection criteria increases performance.

Customizing DECamds

5.5 Optimizing Performance with System Settings

To filter data, choose Filter from the Customize menu, then select filter options from the Filter Data dialog box. To save filter changes, choose Save Filter Changes from the Customize menu before stopping data collection.

- Changing window collection intervals — Increase collection interval values to improve performance (see Section 5.4). To save collection interval changes, choose Save Collection Interval Changes from the Customize menu before stopping data collection.

5.6 Optimizing Performance with Hardware

Table 5–6 provides an approximate guideline for the number of nodes you can monitor when running DECamds on certain computer types.

Table 5–6 Monitoring Nodes

Monitoring Computer Type	Number of Nodes Monitored	
	Observation Only	Observe and Fix
VAXstation 3100	0-30	0-20
VAXstation 4000 Model 60	20-60	20-50
VAX 6000 ¹	75-150	65-130
VAX 4000 Model 90	75-150	65-130
DEC 3000 Model 400	0-50	0-50
DEC 4000 Model 620	0-70	0-70
DEC 7000 Model 720	Any number	Any number

¹With DECwindows display directed to a workstation

Follow these suggestions when choosing and configuring a console:

- Use fast hardware.
Because DECamds is compute and memory-intensive, which is compounded by its real-time, DECwindows based display medium, faster CPUs will improve throughput and perceived response time.
- Use multiprocessors.
DECamds runs two processes: one handling calculations and display; one handling communications between the monitoring node and the remote nodes. A multiprocessor reduces the DECwindows server process competition for CPU time. On single processor systems, the processes must compete.
- Run the monitoring portion of DECamds on a standalone system.
This avoids the possibility of being unable to use DECamds if a cluster is experiencing system resource problems.

Installing DECamds

This appendix describes how to install DECamds software on OpenVMS Alpha and VAX systems.

A.1 Preparing to Install DECamds

This section describes the preparations and requirements necessary for installing DECamds.

DECamds provides online release notes. Digital strongly recommends that you read the release notes before proceeding with the installation. You can print the release notes from the following location:

```
SYS$HELP:AMDS070.RELEASE_NOTES
```

For information about how to access the online release notes, see Section A.5.

A.2 Kit Location and Installation Information

The DECamds kit has two components:

- The Data Analyzer is installed on any system where you want to analyze, detect and display events, and initiate corrective action.
- The Data Provider is installed on any node from which you want to gather system data and permit fixes.

Alpha

For OpenVMS Alpha systems, use the POLYCENTER Software Installation Utility to install the DEC-AXPVMS-AMDS-V0700-1.PCSI kit (see Section A.4) on the software distribution compact disk. ♦

VAX

For OpenVMS VAX systems, install the AMDS070.A and AMDS070.B save sets using the VMSINSTAL procedure. The kits are located in the [AMDS070] directory on the compact disk.

For information on how to install and use DECamds on OpenVMS VAX systems, see Section A.5. You can find the DECamds kits, named AMDS070.A and AMDS070.B, on the following media:

Magnetic tape	Third volume
TK50 tape	Second volume
Compact disk	[AMDS070] directory ♦

Installing DECamsds

A.3 Installation Requirements

A.3 Installation Requirements

This section provides a checklist of hardware and software requirements for DECamsds. A typical installation takes approximately 5 to 10 minutes per node, depending on the type of media and your system configuration.

- **Hardware Requirements**

- A workstation monitor. For any hardware configuration without a DECwindows Motif display device, use the DECwindows server to direct the display to a workstation or an X terminal.
- 16 MB of memory for VAX systems and 32 MB for Alpha systems, for the Data Analyzer portion of DECamsds.

You should use a more powerful system as the number of nodes and the amount of collected data rises. Table A-1 shows general guidelines for the default Data Analyzer node. Note that the following table does not preclude DECamsds from running on a less powerful system than listed for the number of nodes being monitored.

Table A-1 Recommended System Requirements

Number of Monitored Nodes	Recommended Alpha Hardware	Recommended VAX Hardware
1-30	DEC 3000 Model 400, 32 MB	VAXstation 3100, 16 MB
20-50	DEC 3000 Model 400, 64 MB	VAXstation 4000 Model 60
40-90	DEC 3000 Model 500	VAXstation 4000 Model 90
91 or more	DEC 4000 Model 620	VAX 6000-420

- **Operating System Version**

At least one of the following:

- OpenVMS Version 5.5 or higher
- OpenVMS VAX Version 6.0 or higher
- OpenVMS AXP Version 6.1
- OpenVMS Alpha Version 6.2 or higher

- **Display Software**

DECwindows Motif for OpenVMS Version 1.1 or higher installed on the Data Analyzer node system.

- **Privileges**

Operation	Privileges Needed
Monitor only (read-only access)	OPER
Implement fixes (write access)	OPER, CMKRNL
Stop, start, reload, or restart the Data Provider node. Includes changing security or group name.	OPER, CMKRNL, LOG_IO, SYSNAM, SYSPRV

Note

For OpenVMS VAX Version 6.0 and later or OpenVMS AXP Version 6.1 and later, if the Data Provider is running on the same node as the Data Analyzer node, you must also have either SYSPRV privilege or ACL access to the RMA0: device.

- **License Registration**

VAXcluster, VMScluster, or VMScluster-Client license. For information on registering a license, see the *OpenVMS License Management Utility Manual*.

- **Disk Space**

- 3500 blocks on VAX. Note that VMSINSTAL turns off BYPASS privilege at the start of the installation. ♦

- 4000 blocks on Alpha. ♦

To determine the number of free disk blocks on the current system disk, enter the following command at the DCL prompt:

```
§ SHOW DEVICE SYS$SYSDEVICE
```

- **System Parameter Settings**

Same as needed for operating system installation. The Installation Verification Procedure (IVP) requires additional space as follows:

- GLBPAGFIL 1200
- WSMAX 16384

You can modify WSMAX and GLBPAGFIL using the System Management utility (SYSMAN). See the *OpenVMS System Manager's Manual* for more information.

- **Process Account Quotas (minimum)**

- ASTLM¹ 150
- BIOLM¹ 51
- BYTLM¹ 75000
- FILLM 20
- PRCLM 3
- PGFLQUO 25600
- TQELM¹ 100
- WSEXTENT 16384

¹The AMD\$COMM_READS logical determines the default value. If you are reinstalling DECams, or have changed AMD\$COMM_READS, then the following formulas are used to determine the default value:

```
ASTLM >= (AMD$COMM_READS*3)
BIOLM >= (AMD$COMM_READS+1)
BYTLM >= (AMD$COMM_READS*1500)
TQELM >= (AMD$COMM_READS*2)
```

User account quotas are stored in the file SYSUAF.DAT. Use the OpenVMS Authorize utility (AUTHORIZE) to verify and change user account quotas. For more information on modifying account quotas, see the description of the Authorize utility in the OpenVMS system management documentation.

VAX

Alpha

Installing DECamsds

A.3 Installation Requirements

VAX

- **VMSINSTAL Requirements (VAX only)**

- Log in to a privileged account.
- Ensure that the default device and directory is set to the SYSS\$UPDATE logical name.
- Ensure adequate quotas for installation.
- Ensure that users are not logged in to the system.

If VMSINSTAL detects any problems during the installation, it notifies you and asks if you want to continue the installation. In some instances, you can enter YES to continue. To stop the installation process and correct the situation, enter NO and press the Return key; then correct the problem and restart the installation. ♦

Note

Digital recommends that you perform a system disk backup before installing any software. Use the backup procedures that are established at your site. For details about performing a system disk backup, see the OpenVMS Backup utility documentation.

A.4 OpenVMS Alpha System Installation

Alpha

This section describes the installation procedure on an OpenVMS Alpha system.

- **Starting the Installation**

Depending on the interface to your system, use one of these procedures to start the installation:

Interface	Command
Motif	From a DECterm, enter the PRODUCT command at the DCL prompt (\$): \$ PRODUCT
DCL	Enter the PRODUCT command, the name of the task to be performed, and the name of one or more products. For example, to install DECamsds Version 7.0, enter the following command: \$ PRODUCT INSTALL AMDS/SOURCE=distribution-media/HELP

For a description of the features you can request with the PRODUCT INSTALL command when starting an installation such as running the IVP, purging files, and configuring the installation, see the *POLYCENTER Software Installation Utility User's Guide* or Motif help.

As an installation procedure progresses, the system displays a percentage message to indicate how much of the installation is done. For example:

```
Percent Done: 15%
...30%
...46%
...62%
...76%
...92%
%PCSI-I-SUCCESS, operation completed successfully
```

If you started the installation using the /LOG qualifier, the system displays details of the installation.

- **Stopping and Restarting the Installation**

Depending on the interface to your system, use one of these procedures to stop and restart the installation:

Interface	Action
DCL	To stop the procedure at any time: press Ctrl/Y and then enter the PRODUCT REMOVE command to reverse any changes to the system that occurred during the partial installation. This deletes all files created up to that point and causes the installation procedure to exit.
Motif	To close the POLYCENTER Software Installation utility window, choose Exit from the File menu.

- **Recovering from Errors**

If the installation procedure fails for any reason, the following message is displayed:

```
%POLYCENTER Software Installation utility
%INSTAL-E-INSFAIL, The installation of DECams 7.0 has failed.
```

An error during the installation can occur if one or more of the following conditions exist:

- The operating system version is incorrect.
- The prerequisite software version is incorrect.
- Quotas necessary for successful installation are inadequate.
- Process quotas required by the POLYCENTER Software Installation utility are inadequate.
- The OpenVMS Help library is currently in use.

If you receive any error message beginning with %PCSI-E-INSTAL, refer to the DCL HELP/MESSAGE utility for POLYCENTER Software Installation information and a possible solution to the problem.

If the installation fails, you must restart the installation procedure. If the installation fails due to an IVP failure, contact a Digital field service representative.

Sample Installation on an OpenVMS Alpha System

Example A-1 shows a sample installation on an OpenVMS Alpha system. This sample was run on a system that had no previous version of DECams installed. Depending on which layered products you have on your system, you might see additional messages and questions when you perform your installation.

Example A-1 Sample OpenVMS Alpha Installation

```
$ PRODUCT INSTALL AMDS/SOURCE=DAD15:[AMDS070.KIT]
```

```
The following product has been selected:
DEC AXPVMS AMDS V7.0      [Available]
```

```
Do you want to continue? [YES]
```

```
*** DEC AXPVMS AMDS V7.0: DECams (Availability Manager for Distributed Systems) V7.0
```

(continued on next page)

Installing DECamsds

A.4 OpenVMS Alpha System Installation

Example A-1 (Cont.) Sample OpenVMS Alpha Installation

```
COPYRIGHT © (c) 1994, 1995 -- All rights reserved
Digital Equipment Corporation
License and Product Authorization Key (PAK) Information
Do you want all the default values for this product? [YES]
DECamsds Startup File
DECamsds Message Help
DECamsds Logicals Customization File
DECamsds Data Provider Security Access File
DECamsds Data Provider Installation Verification Procedure
DECamsds Data Analyzer Security Access File
DECamsds Data Analyzer Installation Verification Procedure (IVP)
IVP may fail due to the following PQL values being too low:
PQL_MASTLM, PQL_MBIOLM, PQL_MTQELM, or PQL_MBYTLM
See the file AMDS$SYSTEM:AMDS$PCSI_IVP_OUTPUT.LOG for help on failure.
Do you want to view the values? [NO]
%PCSIUI-I-DONEASK, execution phase starting
The following product will be installed:
DEC AXPVMS AMDS V7.0
%PCSI-I-VOLINFO, estimated space information for volume DISK$ALPHAVMS070
-PCSI-I-VOLSPC, 0 required; 89505 available; 89505 net
Portion Done: 0%...30%...40%...50%...60%...70%...80%...90%...100%
The following product has been installed:
DEC AXPVMS AMDS V7.0
%PCSI-I-EXETSTSTART, start of test procedure
%PCSI-I-EXETSTOK, end of test procedure; completed with no errors
*** DEC AXPVMS AMDS V7.0: DECamsds (Availability Manager for Distributed Systems) V7.0
This product requires the following SYSGEN parameters:
    GBLPAGES add 1172 ◆
```

A.5 OpenVMS VAX System Installation

VAX

The DECamsds installation procedure consists of a series of questions and informational messages. See Example A-2 for a sample installation. The actual installation should take only a few minutes, but depending on your installation media, this time could be longer.

To abort the installation procedure at any time, press Ctrl/Y. When you press Ctrl/Y, the installation procedure deletes all files it has created up to that point and exits. You can then start the installation again.

To install DECamsds:

1. **Invoke VMSINSTAL from a privileged account.**

```
@SYS$UPDATE:VMSINSTAL AMDS070 Device-name OPTIONS N
```

Device-name is the name of the device on which you plan to mount the media. For example, MTA0: is the device name for a tape drive.

Installing DECamds

A.5 OpenVMS VAX System Installation

OPTIONS N is an optional parameter that indicates you want to see the question on release notes. If you do not include the OPTIONS N parameter, VMSINSTAL does not ask you about the release notes. You should review the release notes before proceeding with the installation because they might contain additional information about the installation. If you are restarting the installation and have already reviewed the release notes, you do not need to specify OPTIONS N.

For more information about software installation options, see the *OpenVMS System Manager's Manual*.

2. Confirm DECnet status.

```
%VMSINSTAL-W-DECNET, Your DECnet network is up and running.
```

```
.  
.  
.
```

```
* Do you want to continue anyway [NO]?
```

Type yes and continue the installation.

3. Confirm system backup.

```
* Are you satisfied with the backup of your system disk [YES]?
```

You should always back up your system disk before performing any installation. If you are satisfied with the backup of your system disk, press Return.

4. Mount the media.

```
Please mount the first volume of the set on MTA0:.
```

```
* Are you ready? YES
```

```
%MOUNT-I-MOUNTED, AMDS MOUNTED ON _MTA0: (NODE 1)
```

```
The following products will be processed:
```

```
  DECamds V7.0
```

```
  Beginning installation of DECamds
```

```
V7.0 at 10:43
```

```
%VMSINSTAL-I-RESTORE, Restoring product saveset A...
```

You should now mount the first distribution volume on the device you specified when you invoked VMSINSTAL. The device name appears in the line preceding the question.

If you entered the wrong device name when you invoked VMSINSTAL and need to restart the installation, enter NO in response to the "Are you ready?" question. To abort the installation for other reasons, press Ctrl/Y.

If your installation kit contains more than one volume, VMSINSTAL prompts you to mount the additional volumes and then asks you to indicate that you are ready for the installation to proceed.

Installing DECamsds

A.5 OpenVMS VAX System Installation

5. Select a release notes option.

If you select Options N, the following is displayed:

Release notes included with this kit are copied to SYS\$HELP.

Additional Release Notes Options:

1. Display release notes
2. Print release notes
3. Both 1 and 2
4. None of the above

* Select option [2]:

If you choose to display the release notes, you can terminate the display at any time by pressing Ctrl/C. Release notes are copied to the system help directory (SYS\$HELP:AMDS070.RELEASE_NOTES), even if you select option 4.

After the installation, enter the following command to review the release notes through the Help facility:

```
$ HELP DECamsds RELEASE_NOTES
```

Note

The name of the release notes file installed by VMSINSTAL consists of the current product name and version number. Do not delete release notes for previous versions of DECamsds.

6. Choose which components to install.

You now have the choice to install either the DECamsds Data Analyzer, or the DECamsds Data Provider, or both on this system.

- * Would you like to install the DECamsds Data Analyzer on this system [Y]?
- * Would you like to install the DECamsds Data Provider on this system [Y]?

7. Respond to license registration queries.

You will be asked if you have loaded the appropriate license.

The right to use the DECamsds Data Provider is granted with the VAXCLUSTER license. This installation will only ask for the presence of the license. If you answer yes to the following question and do not have a license, then the IVP will fail.

* Do you have the VAXCLUSTER license loaded [Y]?

If you have not registered and loaded your PAK, you must answer NO to this question. You must register and load your PAK, then restart the installation. For information on registering a license, see the *OpenVMS License Management Utility Manual*.

8. Choose the Help Message installation option.

The Help Message utility (MSGHLP) provides online explanations and user actions for OpenVMS messages.

The MSGHLP database, DECamds.MSGHLP\$DATA, consumes approximately 200 blocks and will be placed by default on your system disk in SYS\$COMMON:[SYSHLP].

Refer to the OpenVMS System Messages: Companion Guide for Help Message Users and the OpenVMS System Manager manual for instruction on how to add the DECamds Help Message database to your system.

* Would you like to install the MSGHLP database for DECamds [Y]?

If you answer YES (or use the default), the DECamds help message database, DECamds.MSGHLP\$DATA, will be copied to SYS\$COMMON:[SYSHLP]. Refer to the *OpenVMS System Messages: Companion Guide for Help Message Users* for complete information on setting up and using the Help Message utility.

9. Choose the Installation Verification Procedure (IVP) option.

* Do you want to run the IVP after the installation [YES]?

It is recommended that you run the IVP because it ensures that the installation is successful. If the IVP finds the Data Provider on the system, it will ensure the driver is left in the state in which the IVP found it.

You can run the IVP independently to verify that the software is available on your system. See Section A.9 for information about running the IVP separately.

10. Choose the purge files option.

* Do you want to purge files replaced by this installation [YES]?

Purging is recommended; however, if you want to keep files from the previous version, enter NO and press Return.

11. Read informational messages.

See the sample installation procedure in Example A-2.

12. Observe the Installation Verification Procedure (IVP).

See the sample installation procedure in Example A-2.

Sample Installation on an OpenVMS VAX System

Example A-2 shows a sample installation on an OpenVMS VAX system and assumes that DECnet has been shut down, that no users are logged on to your system, and that OPTIONS N is specified to print the release notes. The Installation Verification Procedure (IVP) runs at the end of the installation.

This sample was run on a system that had no previous version of DECamds installed. Depending on which layered products you have on your system, you might see additional messages and questions when you perform your installation.

Installing DECamsds

A.5 OpenVMS VAX System Installation

Example A-2 Sample OpenVMS VAX Installation

```
$ @VMSINSTAL AMDS070 SYS$UPDATE
VAX/VMS Software Product Installation Procedure V7.0

It is 27-JAN-1995 at 15:13.
Enter a question mark (?) at any time for help.
* Are you satisfied with the backup of your system disk [YES]?
The following products will be processed:
    AMDS V7.0

Beginning installation of AMDS V7.0 at 15:14
%VMSINSTAL-I-RESTORE, Restoring product save set A ...
%VMSINSTAL-I-REMOVED, Product's release notes have been moved to SYS$HELP.

Copyright (c) 1995 Digital Equipment Corporation. All rights reserved.
Beginning the installation of DECamsds V7.0.
%AMDS-I-VERINSTAL, Installing DECamsds on an OpenVMS VAX V7 system

You now may choose to install the DECamsds Data Analyzer. The
Data Analyzer must be installed on a system in which at least
DECwindows Motif V1.1 has been installed.

* Would you like to install the DECamsds Data Analyzer on this system [Y]?

The right to use the DECamsds Data Provider is granted with the
VAXCLUSTER license. This installation will only ask for the
presence of the license. If you answer yes to the following
question and do not have a license, then the IVP will fail.

* Do you have an appropriate license loaded [Y]?
* Do you want to run the IVP after the installation [YES]?
* Do you want to purge files replaced by this installation [YES]?

    No further questions will be asked during the installation.

This installation will take approximately 5-10 minutes to complete.
%VMSINSTAL-I-RESTORE, Restoring product save set B ...

The DECamsds startup file (AMDS$STARTUP.COM) is being copied to the
SYS$STARTUP directory. Digital recommends you include this file in
your site specific startup procedures as follows:

    @SYS$STARTUP:AMDS$STARTUP START

The command procedure AMDS$LOGICALS.COM was already found in the
SYS$COMMON:[AMDS] directory. This installation will provide an
AMDS$LOGICALS.TEMPLATE file instead of the AMDS$LOGICALS.COM file.
Please check the new .TEMPLATE file and add any changes to your
current AMDS$LOGICALS.COM file.

The file SYS$COMMON:[AMDS]AMDS$CONSOLE_ACCESS.DAT already exists. This
installation will provide a AMDS$CONSOLE_ACCESS.TEMPLATE file instead
of the AMDS$CONSOLE_ACCESS.DAT file to avoid superceding a version of
the file you may currently be using.
```

(continued on next page)

Installing DECamds A.5 OpenVMS VAX System Installation

Example A-2 (Cont.) Sample OpenVMS VAX Installation

The installation will now provide the DECamds customization files. If this installation finds one of the customization files already residing in the installation directory, then the installation will provide a .TEMPLATE file instead of the .DAT file. It will be left up to the installer to check the AMDS\$SYSTEM directory for any differences between the .DAT and .TEMPLATE files.

The installation procedure will provide a .TEMPLATE file for the following customization files found in the AMDS\$SYSTEM directory:

```
AMDS$APPLIC_CUSTOMIZE.DAT
AMDS$SEVERITY_DEFS.DAT
AMDS$OCCURRENCE_DEFS.DAT
AMDS$THRESHOLD_DEFS.DAT
AMDS$INTERVAL_DEFS.DAT
AMDS$FILTER_DEFS.DAT
AMDS$SORT_DEFS.DAT
AMDS$GEOMETRY_DEFS.DAT
```

The file SYS\$COMMON:[AMDS]AMDS\$DRIVER_ACCESS.DAT already exists. This installation will provide a AMDS\$DRIVER_ACCESS.TEMPLATE file instead of the AMDS\$DRIVER_ACCESS.DAT file to avoid superceding a version of the file you may currently be using.

DECamds installation V7.0 is complete.

```
%VMSINSTAL-I-MOVEFILES, Files will now be moved to their target directories...
%AMDS-I-NODRIVER, data collection not started, only define AMDS$SYSTEM
```

DECamds V7.0 Installation Verification Procedure (IVP) Beginning.

Copyright © Digital Equipment Corporation 1995.
All Rights Reserved.

This IVP will check following pieces of DECamds:

```
DATA PROVIDER - RMDRIVER
```

```
DATA ANALYZER - AMDS$CONSOLE and AMDS$COMM
```

Before running this IVP, any process currently running the DECamds Data Analyzer on this machine must be stopped. The IVP will now check for the existence of the AMDS\$COMM process which indicates that someone is currently running the Data Analyzer.

```
AMDSIVP-I-RMRELOAD, reloading with new data provider for IVP to use
```

Copyright (c) 1995 Digital Equipment Corporation. All rights reserved.

```
%AMDS-I-RMSHUT, stopping RMDRIVER processing for this node
```

```
%AMDS-S-RMSUCCESS, RMDRIVER shutdown successful
```

Copyright (c) 1995 Digital Equipment Corporation. All rights reserved.

```
%AMDS-I-RMSTART, starting RMDRIVER processing for this node
```

```
%AMDS-I-LOADSECDB, loading security database
```

```
%AMDS-S-RMSUCCESS, RMDRIVER startup successful
```

You currently do not have a DECwindows display to direct the Data Analyzer output towards. You are now given the option to continue and allow the IVP to create a display for you or exit and either create your own display or run the IVP from a workstation.

(continued on next page)

Installing DECamsds

A.5 OpenVMS VAX System Installation

Example A-2 (Cont.) Sample OpenVMS VAX Installation

Would you like to continue? [Y/N]Y

You have chosen to let the IVP create a DECwindows display. You will be prompted for a node to direct the display towards. Specify a valid node on which you are allowed to create a display from your current node. This procedure does not check the validity of the remote node you specify.

Nodename to direct the display towards: AMDS
%DCL-S-SPAWNED, process AMDS\$IVP_CONS spawned

Waiting 5 minutes to allow the DECamsds Data Analyzer to run. You should see the Event Log and System Overview windows appear on your DECwindows display device.

AMDSIVP-S-ALLPASS, DECamsds has passed the IVP

DECamsds V7.0 Installation Verification Procedure Complete

Installation of AMDS V7.0 completed at 15:23

VMSINSTAL procedure done at 15:23

\$ LOG
SYSTEM logged out at 27-JAN-1995 15:23:53.60 ♦

Recovering from Errors

Errors can occur during the installation if any of the following conditions exist:

- The operating system version is incorrect.
- A prerequisite software version is incorrect.
- Privileges necessary for successful IVP are insufficient.
- Quotas necessary for successful IVP are insufficient.
- System parameter values for successful IVP are insufficient.
- The OpenVMS help library is currently in use.
- The product license has not been registered and loaded.
- The node on which the DECamsds Data Analyzer was being displayed does not allow connections from your process and node.

For descriptions of the error messages generated by these conditions, see the OpenVMS documentation on system messages, recovery procedures, and OpenVMS software installation. If you are notified that any of these conditions exist, you should take the appropriate action as described in the message. For information on installation requirements, see Section A.3.

If the IVP fails, check the AMDS\$SYSTEM:AMDS\$CONS_LOG.LOG for any errors that might have occurred while the IVP was executing the console verification portion.

A.6 Postinstallation Tasks on Data Provider Nodes

Perform the following tasks after installing DECamds on Data Provider nodes:

1. If you have not read the release notes, please read them.
2. Modify user accounts.
Users who maintain the security or group name files or load new versions of the driver need privileges associated with the driver startup procedure.
3. Add AMDS\$STARTUP.COM to the node's startup and shutdown procedures to provide for automatic startup and shutdown of the Data Provider driver when a node is booted or shut down.

- On an OpenVMS Version 5.5 system, add the following command line to SYSS\$MANAGER:SYSTARTUP_V5.COM

```
$ @SYS$STARTUP:AMDS$STARTUP.COM START
```

- On any OpenVMS system, add the following command line to SYSS\$MANAGER:SYSTARTUP_VMS.COM

```
$ @SYS$STARTUP:AMDS$STARTUP.COM START
```

Also, edit SYSHUTDOWN.COM to add the following line:

```
$ @SYS$SHUTDOWN:AMDS$STARTUP.COM STOP
```

4. Modify default security files.
To implement fixes, which require write access, the security files must be modified. The Data Provider security file contains a list of three-part codes representing Data Analyzer nodes that have read or write access to that node. Refer to Section 1.3 for complete instructions about designing security files.
5. Assign a node to a group.
See Section 1.3.2.1.
6. Start DECamds (the Data Provider).
Even though the IVP starts and stops the driver, you must start the Data Provider drivers by entering the following command on each node:

```
$ @SYS$STARTUP:AMDS$STARTUP.COM START
```

Note

Starting, stopping, or reloading DECamds (the AMDS\$STARTUP.COM procedure) requires at least TMPMBX, NETMBX, SYSNAM, LOG_IO, and CMKRNL privileges. Use the OpenVMS Authorize utility (AUTHORIZE) to determine whether users have the required privileges and then make adjustments as needed.

Installing DECamsds

A.6 Postinstallation Tasks on Data Provider Nodes

A.6.1 Starting, Stopping, and Reloading DECamsds

To start and stop the Data Provider driver, enter the following command: (Use this command if a node will be used to both provide and collect system data.)

```
$ @SYS$STARTUP:AMDS$STARTUP.COM [parameter]
```

where the optional *parameter* is one of the following:

NODRIVER	Defines the default input and output logicals on the Data Analyzer node driver. Use this parameter on the Data Analyzer node where the Data Provider driver is not running. It is the default.
START	Starts the Data Provider driver.
STOP	Stops the Data Provider driver.
RELOAD	Loads a new Data Provider driver. Use this parameter when installing a new version of DECamsds.

Note

On systems running OpenVMS VAX Version 6.0 or higher, if you use the OpenVMS Snapshot Facility, stop the DECamsds Data Analyzer and Data Provider node drivers before taking a system snapshot.

A.7 Postinstallation Tasks on the Data Analyzer Node

Perform the following tasks after installing the DECamsds Data Analyzer:

1. If you were previously running an earlier version of DECamsds, check the differences between the .DAT or .COM files on your system and the associated .TEMPLATE files provided with the new kit. Change your existing files as necessary.

Note

The new .TEMPLATE files may contain important changes. However, to avoid altering your customizations, the upgrade procedure does not modify your existing customized versions of these files. Check the new .TEMPLATE versions of these files provided with the kit, and make the appropriate change to your files.

2. Modify default DECamsds security files on each Data Analyzer node.
To implement fixes, which require write access, the security files must be modified. Refer to Section 1.3 for complete instructions about designing security files.

3. Define the system directory logical name AMDS\$SYSTEM.
To define the logical name AMDS\$SYSTEM on systems running the Data Analyzer but not the Data Provider, enter the following command:

```
$ @SYS$STARTUP:AMDS$STARTUP.COM NODRIVER
```

This command requires SYSNAM privilege. The NODRIVER parameter specifies that the procedure is to define the input and output logical names in AMDS\$LOGICALS.COM.

4. Modify user accounts as needed.

Installing DECamds

A.7 Postinstallation Tasks on the Data Analyzer Node

To use DECamds, user accounts require certain privileges and quotas:

- Using the Data Analyzer node for data collection (read access) requires TMPMBX, NETMBX, and OPER privileges.
- Performing fixes (write access) requires the CMKRNL privilege in addition to TMPMBX, NETMBX, and OPER.
- Using the AMDS\$STARTUP.COM to start, stop, or reload the Data Provider requires at least TMPMBX, NETMBX, SYSNAM, LOG_IO, and CMKRNL privileges.

5. Start the application.

For example, the following command starts DECamds with all input files read from AMDS\$SYSTEM and all output files written to the current default directory. Only data from group A nodes and group B nodes are displayed.

```
$ AVAIL /CONFIGURE=AMDS$SYSTEM /LOG_DIRECTORY=SYS$LOGIN-  
_$/GROUP=(GROUP_A, GROUP_B)
```

See Chapter 2 for startup options.

A.8 Determining and Reporting Problems

If you encounter a problem while using DECamds, report the problem to Digital. Depending on the nature of the problem and the type of support you have, take one of these actions:

- If your software contract or warranty agreement entitles you to telephone support, call your Digital support center.
- If the problem has to do with the DECamds documentation, submit a Reader's Comments form. See the Preface for instructions.

Review the Software Product Description (SPD) and Warranty Addendum for an explanation of the warranty. If you encounter a problem during the warranty period, report the problem as indicated above or follow alternate instructions provided by Digital for reporting SPD nonconformance problems.

A.9 Running the Installation Verification Procedure Separately

Usually the Installation Verification Procedure (IVP) runs during installation. Should system problems occur after you install DECamds, check the integrity of installed files by executing the following command procedure:

```
$ @SYS$TEST:AMDS$IVP.COM
```

The IVP leaves the Data Provider in the same state in which it was found. For example, if the Data Provider is running, the IVP stops and starts it.

Files and Logical Names

The DECams installation procedure installs files and defines logical names to customize the environment.

The installation procedure defines all logical names in executive mode in the system table (with the /SYSTEM /EXECUTIVE qualifiers). However, you can define logical names in /JOB or /GROUP tables, preceding the system definitions.

Table B-1 and Table B-2 explain the files installed and logical names defined with the Data Analyzer.

Table B-3 and Table B-4 explain the files installed and logicals defined on each node running the Data Provider.

Logical names are added to the logical name table when the AMDS\$LOGICALS.COM procedure is invoked by AMDS\$STARTUP.COM.

Note

Logical names can be a search list of other logicals.

The logical names in Table B-4 and Table B-2 must be defined in the job, group, or system table. If you change the name, define the new logical in the job, group, or system table.

B.1 Files and Logical Names for the Data Analyzer Node

Table B-1 and Table B-2 contain the names of all files created on a Data Analyzer node when DECams is installed.

Table B-1 Files on the DECams Data Analyzer

Directory-Logical:File-Name	Function
AMDS\$HELP:AMDS\$HELP.HLB	Help library
AMDS\$SYSTEM:AMDS\$*.DAT	Customization files
AMDS\$SYSTEM:AMDS070.RELEASE_NOTES	Product Release Notes
AMDS\$SYSTEM:AMDS\$COMM.EXE	Communication image
AMDS\$SYSTEM:AMDS\$CONSOLE.EXE	Data Analyzer image
AMDS\$SYSTEM:AMDS\$CONSOLE.UID	User interface description file
AMDS\$SYSTEM:AMDS\$CONSOLE_ACCESS.DAT ¹	Data Analyzer security file

¹Can be provided as a TEMPLATE file, depending on whether the file was found during installation.

(continued on next page)

Files and Logical Names

B.1 Files and Logical Names for the Data Analyzer Node

Table B–1 (Cont.) Files on the DECamds Data Analyzer

Directory-Logical:File-Name	Function
AMDS\$SYSTEM:AMDS\$LOGICALS.COM ¹	Logical name definition file
AMDS\$SYSTEM:AMDS\$VMS*.*.LIB	DECamds version-specific libraries
AMDS\$TEST:AMDS\$IVP.COM	Installation verification procedure
SYSS\$STARTUP:AMDS\$STARTUP.COM	DECamds startup file

¹Can be provided as a TEMPLATE file, depending on whether the file was found during installation.

Table B–2 Logical Names Defined for the Data Analyzer

Logical Name	Definition	Default
AMDS\$COMM_BUFFER_SIZE	This value is the size (in bytes) of the communications buffer between the AMDS\$CONSOLE process and the AMDS\$COMM process.	300000 bytes
AMDS\$COMM_READS	This value is the number of read aheads posted by the DECamds communications process (AMDS\$COMM) to handle the delivery of remote response packets from the Data Provider to the Data Analyzer node.	50 read aheads
AMDS\$COMM_PKT_RETRY	Specifies the number of retries before quitting and issuing a "delivery path lost message."	4
AMDS\$COMM_PKT_TMOUT	Specifies the timeout period (in seconds) for packet retry for the Data Analyzer.	10
AMDS\$CONFIG	The device and directory location for the following DECamds input files: AMDS\$APPLIC_CUSTOMIZE.DAT AMDS\$COMM.EXE AMDS\$CONSOLE.UID AMDS\$CONSOLE_ACCESS.DAT AMDS\$VMS*.*.LIB All customization files AMDS\$_DEFS.DAT	AMDS\$SYSTEM
AMDS\$DPI	This value specifies the DPI value of your display device.	75 or 100
AMDS\$LOG	The device and directory location for the following DECamds output files: AMDS\$EVENT_LOG.LOG AMDS\$LOCK_LOG.LOG	AMDS\$SYSTEM

B.2 Files and Logical Names for the Data Provider Nodes

Table B–3 and Table B–4 contain the names of all files created on a node when a Data Provider is installed.

Files and Logical Names

B.2 Files and Logical Names for the Data Provider Nodes

Table B-3 Files on Nodes Running the Data Provider

Directory-Logical:File-Name	Function
AMDSSSYSTEM:AMDSSDRIVER_ACCESS.DAT ¹	Data Provider security file
AMDSSSYSTEM:AMDSSLOGICALS.COM ¹	Logical name definition file
AMDSSSYSTEM:RMCP.EXE	Management interface to the Data Provider
SYSSHELP:AMDS070.RELEASE_NOTES	Product Release Notes
SYSSHELP:AMDSHELP.HLB	Help library
SYSSLOADABLE_IMAGES:RMDRIVER.EXE, .STB ²	On VAX systems, Data Provider
SYSSLOADABLE_IMAGES:SYSSRMDRIVER.EXE, .STB ³	On Alpha systems, OpenVMS Alpha driver.
SYSSSTARTUP:AMDSSSTARTUP.COM	DECamds startup file
SYSSTEST:AMDSSIVP.COM	Installation verification procedure

¹Can be provided as a TEMPLATE file, depending on whether the file was found during installation.
²VAX specific
³Alpha specific

Table B-4 Logical Names Defined on Nodes Running the Data Provider

Logical Name	Definition	Default
AMDSSCONFIG	The device and directory location for the DECamds input file AMDSSDRIVER_ACCESS.DAT.	AMDSSSYSTEM
AMDSSDEVICE	This logical is translated as the first LAN device to which the Data Provider or Data Analyzer node attempts to connect. The attempts are made in this order: AMDSSDEVICE, FXA0, XEA0, XQA0, EFA0, ETA0, ESA0, EXA0, EZA0, FCA0, ECA0. If your LAN line is not in this list, use AMDSSDEVICE. If the Data Analyzer node and Data Provider run on the same node, *RMA0 is used.	Undefined
AMDSSGROUP_NAME	The Group to which the node is assigned. Choose an alphanumeric string of up to 15 characters. The Group Name is defined on the node running the Data Provider and is used by the Data Analyzer node to display nodes in the System Overview window.	DECamds
AMDSSNUM_DL_READS	The number of data link reads to be posted by the Data Provider as read ahead buffers. Generally between 4 and 8 should be sufficient to allow the Data Provider to process without having to wait for a data link buffer to be cleared.	5 data link reads ¹

¹Each read request requires 1500 bytes of BYTCNT quota used for the starting process.

(continued on next page)

Files and Logical Names

B.2 Files and Logical Names for the Data Provider Nodes

Table B-4 (Cont.) Logical Names Defined on Nodes Running the Data Provider

Logical Name	Definition	Default
AMDS\$RM_DEFAULT_INTERVAL	The number of seconds between multicast hello messages from the Data Provider to the Data Analyzer node when the Data Provider is inactive or is only minimally active. The minimum value is 15. The maximum value is 300.	30
AMDS\$RM_OPCOM_READ	This logical defined as TRUE allows OPCOM messages for READ failures from the Data Provider. Defined as FALSE, the message facility is disabled.	TRUE
AMDS\$RM_OPCOM_WRITE	This logical defined as TRUE allows OPCOM messages for write (Fix) successes and failures from the Data Provider. Defined as FALSE, the message facility is disabled.	TRUE
AMDS\$RM_SECONDARY_INTERVAL	The number of seconds between multicast hello messages from the Data Provider to the Data Analyzer node when the Data Provider is active. The minimum value is 15. The maximum value is 1800.	90

B.3 Log Files

The DECamds Data Analyzer records two log files:

- An events log file named AMDS\$EVENT_LOG.LOG. This ASCII text file records all event messages displayed in the Event Log window.
- A lock contention log file named AMDS\$LOCK_LOG.LOG. This ASCII text file records all lock contention information displayed in the Lock Contention window.

Both log files are created when the DECamds application is started. Either file can be edited while the application is running.

B.4 Event Log File

The event log file keeps a record of the events detected by DECamds. You can review it without a DECwindows terminal. Every 30 minutes, DECamds writes a message to the file, noting the date and time.

Example B-1 is an example of AMDS\$LOG:AMDS\$EVENT_LOG.LOG.

Files and Logical Names B.4 Event Log File

Example B-1 Sample Event Log File

```
Time      Sev  Event
Opening DECamds Event Log on date/time: 11:16:07.98
11:16:07.98 0 CFGDON, PROD12 configuration done
11:16:08.44 0 CFGDON, PROD09 configuration done
11:16:09.65 0 CFGDON, AXPND1 configuration done
11:16:11.47 0 CFGDON, PROD01 configuration done
11:16:11.89 0 CFGDON, VAXND1 configuration done
11:16:12.14 0 CFGDON, PROD15 configuration done
11:16:14.02 0 CFGDON, PROD14 configuration done
11:16:14.57 60 HIDIOR, PROD12 direct I/O rate is high
11:16:14.57 70 HITTLP, PROD12 total page fault rate is high
11:16:14.57 80 LOMEMY, PROD12 free memory is low
11:16:14.58 70 HITTLP, PROD09 total page fault rate is high
11:16:14.58 80 LOMEMY, PROD09 free memory is low
11:16:15.32 70 HITTLP, AXPND1 total page fault rate is high
11:16:25.33 60 HIBIOR, PROD09 buffered I/O rate is high
11:16:35.46 60 HIBIOR, AXPND1 buffered I/O rate is high
11:16:40.62 95 LOSWSP, AXPND1 DISK$ALPHAVMS015:[SYS0.SYSEXE]SWAPFILE.SYS swap file space is low
11:16:49.84 70 HITTLP, PROD09 total page fault rate is high
11:16:55.14 60 HIBIOR, PROD12 buffered I/O rate is high
11:17:14.58 0 CFGDON, PROD05 configuration done
11:17:14.94 70 HITTLP, PROD09 total page fault rate is high
11:17:16.93 0 CFGDON, PROD04 configuration done
11:17:18.10 0 CFGDON, PROD17 configuration done
11:17:18.15 0 CFGDON, PROD10 configuration done
11:17:19.50 60 HIBIOR, PROD10 buffered I/O rate is high
11:17:19.50 60 HIDIOR, PROD10 direct I/O rate is high
11:17:19.50 70 HITTLP, PROD10 total page fault rate is high
11:17:19.50 80 LOMEMY, PROD10 free memory is low
11:17:20.33 60 HIBIOR, PROD05 buffered I/O rate is high
11:17:21.49 0 CFGDON, PROD20 configuration done
11:17:21.52 0 CFGDON, PROD13 configuration done
11:17:24.96 0 CFGDON, PROD06 configuration done
11:17:35.35 0 CFGDON, PROD07 configuration done
11:17:39.84 60 HINTER, PROD07 interrupt mode time is high
11:17:40.21 70 HITTLP, PROD09 total page fault rate is high
11:18:04.69 60 HIBIOR, PROD10 buffered I/O rate is high
11:18:05.36 60 HIDIOR, PROD07 direct I/O rate is high
11:18:10.49 60 HIBIOR, PROD09 buffered I/O rate is high
11:18:10.49 60 HIDIOR, PROD09 direct I/O rate is high
11:18:14.70 60 HIBIOR, PROD12 buffered I/O rate is high
11:18:15.68 60 HIBIOR, AXPND1 buffered I/O rate is high
11:18:26.05 60 HIBIOR, PROD05 buffered I/O rate is high
11:18:40.57 75 HIHRDP, PROD10 hard page fault rate is high
11:18:45.80 60 HIDIOR, PROD09 direct I/O rate is high
11:18:55.91 60 HINTER, PROD07 interrupt mode time is high
11:19:09.67 60 HIBIOR, PROD09 buffered I/O rate is high
11:19:09.67 60 HIDIOR, PROD09 direct I/O rate is high
11:19:09.67 75 HIHRDP, PROD09 hard page fault rate is high
11:19:15.48 60 HIBIOR, PROD05 buffered I/O rate is high
```

Files and Logical Names

B.5 Lock Contention Log File

B.5 Lock Contention Log File

Example B-2 is an example of a Lock Contention Log File.

Example B-2 Sample Lock Contention Log File

```
*****
Time: 9-JUL-1995 14:23:46.68
Master Node: AXPND1
Resource Name: QMAN$JBC_ALIVE_01
Parent Resource Name: QMAN$MSR_$10$DKA300....ñ.....
RSB Address: 805B1400, GGMODE: EX, CGMODE: EX
Hex Representation
 514D414E 244A4243 (Bytes 0 - 7)
 5F414C49 56455F30 (Bytes 8 - 15)
 31000000 00000000 (Bytes 16 - 23)
 00000000 000000C0 (Bytes 24 - 31)
Status: VALID
*****
Time: 9-JUL-1995 14:28:42.44
Resource Name: QMAN$JBC_ALIVE_01
Parent Resource Name: QMAN$MSR_$10$DKA300....ñ.....
Blocking Lock Data
Node: AXPND1, PID: 2020008C, Name: JOB_CONTROL
LKID: 0200015E, GR Mode: EX
Flags: NOQUEUE
Local Copy
Blocked Lock on WAITING queue
Node: AXPND1, PID: 2020008D, Name: QUEUE_MANAGER
LKID: 2000013B, RQ Mode: CR
Flags: NODLCKW
Local Copy
*****
```

B.6 OPCOM Log

The following examples show some of the OPCOM messages that appear in the operator log file from the Data Provider:

```
%%%%%%%% OPCOM 2-JAN-1995 08:16:21.92 %%%%%%%%%
Message from user RMDRIVER
RMA0: - No privilege to access from node 2.2
```

This message means that the node does not have the privilege to perform a read operation.

```
%%%%%%%% OPCOM 2-JAN-1995 10:10:45.08 %%%%%%%%%
Message from user RMDRIVER
RMA0: - No privilege to write from node 2.2
```

This message means that the Data Provider does not have the privilege to perform a write operation.

```
%%%%%%%% OPCOM 2-JAN-1995 12:35:05.28 %%%%%%%%%
Message from user RMDRIVER
RMA0: - Process 2390003c modified from node 2.2
```

This message means that the Data Provider has successfully performed a WRITE operation on the node.

Glossary

automatic data collection

Data collection that begins automatically when the Data Analyzer runs and recognizes a Data Provider. By default, this feature is enabled.

The default data windows for which automatic collection is enabled are:

- Node Summary
- Page/Swap File Summary
- Lock Contention Summary
- Cluster Transition Summary

Automatic Event Collection

Allows the event detection code to automatically start collecting more data to try and determine the root cause of an event. Automatic investigation only applies to events that are detected after you enable the option.

This feature does not apply to any Lock Contention events. To enable automatic lock contention detection, use the DECamds Customizations dialog box, as explained in Section 5.1.

collection interval

The frequency at which the Data Analyzer will send requests to a Data Provider to collect data.

Data Analyzer

The portion of DECamds that collects and displays system data from Data Provider nodes. You can also perform fixes with the Data Analyzer.

Data Provider

The portion of DECamds that is installed for purposes of providing system data when requested by authorized Data Analyzers. A Data Provider node uses the OpenVMS LAN drivers to receive and send data across the network.

data window

A Data Analyzer window that displays additional data. A number of different data windows are available as follows (see also Chapter 3):

- CPU Modes Summary
- CPU Summary
- Disk Status Summary
- Volume Summary
- Single Disk Summary
- Lock Contention Summary
- Memory Summary
- Node Summary

Page/Swap File Summary
Process I/O Summary
Single Lock Summary
Single Process Summary
Cluster Transition/Overview Summary
System Communication Architecture Summary
NISCA Summary

event

A description of a potential resource availability problem, based on rules defined by the Data Analyzer and customized thresholds. Events trigger display changes in data windows such as color and item highlighting.

Event Log window

One of two primary Data Analyzer windows that displays events as they occur. For each event, you can display more detailed information to investigate the underlying problem by double-clicking on the event. You can also perform fixes for some events from this window.

fix

A corrective action made to a Data Provider node but initiated from the Data Analyzer node.

group

A set of remote Data Provider nodes with similar attributes; for example, all the members of a VMScluster can be in the same group. The group that a node belongs to is determined by the translation of the AMDSS\$GROUP_NAME logical on each Data Analyzer.

page

A unit used by the operating system to section memory. On VAX systems, a page is 512 bytes. On Alpha systems, a page can be 8 kilobytes (8192 bytes), 16 KB, 32 KB, or 64 KB.

pagelet

A unit used by the OpenVMS Alpha operating system to break down the page into smaller addressable units. One pagelet is the same as a VAX page: 512 bytes.

System Overview window

One of two primary Data Analyzer windows; it graphically displays groups and the nodes that belong to each group. The System Overview window provides summary data about CPU, Memory, Process I/O usage, Number of Processes in CPU Queues, Operating System Version, and Hardware Model for the nodes being monitored.

security triplet

A three-part access code located in the AMDSS\$DRIVER_ACCESS.DAT and AMDSS\$CONSOLE_ACCESS.DAT files that enables communications to be established between the Data Analyzer and Data Provider.

A

Access

- for Data Analyzers, 1-4
 - for Data Providers, 1-4
 - read-only, 1-9
- Account field, 3-24
- Active field, 3-17
- Adjust Working Set fix, 4-3
- Alpha installation, A-4 to A-6
- See also Installing DECcmds
- AMDSS*_DEFS.DAT files, B-1
- AMDSS\$APPLIC_CUSTOMIZE.DAT file, 5-1
- AMDSS\$COMM.EXE file, B-1
- AMDSS\$COMMBUFOVF logical name, 5-18
- AMDSS\$COMM process quotas, 5-2
- AMDSS\$COMM_BUFFER_SIZE logical name, 5-18, B-2
- AMDSS\$COMM_READS logical name, 5-18, B-2
- AMDSS\$CONFIG logical name, B-2, B-3
- AMDSS\$CONSOLE.EXE file, B-1
- AMDSS\$CONSOLE.UID file, B-1
- AMDSS\$CONSOLE_ACCESS.DAT file, 1-4, A-14, B-1
- AMDSS\$DEVICE logical name, B-3
- AMDSS\$DRIVER_ACCESS.DAT file, 1-4, A-13, B-3
- example, 1-8
- AMDSS\$EVENT_LOG.LOG file, 2-6, B-4
- AMDSS\$GROUP_NAME logical name, 1-8, B-3
- AMDSS\$IVP.COM file, B-2, B-3
- AMDSS\$LOCK_LOG.LOG file, B-4
- AMDSS\$LOGICALS.COM command procedure, 1-8
- AMDSS\$LOGICALS.COM file, B-1, B-3
- AMDSS\$LOG logical name, B-2
- AMDSS\$NUM_DL_READS logical name, B-3
- AMDSS\$RM_DEFAULT_INTERVAL logical name, B-3
- AMDSS\$RM_OPCOM_READ logical name, B-4
- AMDSS\$RM_OPCOM_WRITE logical name, B-4
- AMDSS\$RM_SECONDARY_INTERVAL logical name, B-4
- AMDSS\$STARTUP.COM command procedure, A-14

- AMDSS\$STARTUP.COM file, B-2
- AMDSS\$THRESHOLD_DEFS.DAT file, 5-10
- AMDSS\$VMS*-.LIB files, B-2
- AMDS070.RELEASE_NOTES, B-1, B-3
- Assigning a node to a group, 1-8
- Asynchronous system traps limit (ASTLM), 3-27
- Automatic
- data collection, 5-2, Glossary-1
 - event collection, Glossary-1
 - event investigation, 5-2
 - fix, 4-7
 - investigation for events, 5-3
 - investigation for locks, 5-3
- Availability messages
- setting broadcast intervals, 1-10
- AVAIL command, 2-1

B

- Bell filter, 2-7
- Bell volume, 2-7
- BIO (buffered I/O), 3-27
- byte limit (BYTLM), 3-28
 - field, 3-20
 - limit (BIOLM), 3-27
 - Limit Remaining field, 3-20
 - rate, 3-20
 - rate display, 2-3
 - wait state, 3-27
- Blocks
- number free on a volume, 3-9
 - number used on a volume, 3-9
 - percentage number used on a volume, 3-9
- Broadcast intervals, B-3
- setting for node availability messages, 1-10
- Buffered I/O
- See BIO
- Byte limit remaining for process I/O, 3-20

C

- Change process priority fix, 4-4
- Choosing data categories, 2-5
- Classes
- CPU, 5-11
 - customizing, 5-10
 - I/O, 5-11

- Classes (cont'd)
 - memory, 5-11
 - thresholds, 5-11
- Cluster hung, 4-2
- Cluster Transition/Overview Summary window, 3-29 to 3-32
- Collecting data
 - automatic at startup, 5-3
 - by category, 2-5
 - by event, 2-5
 - choosing a data category, 2-5
 - default, 5-3
 - for events, 5-2
 - for lock events, 5-2
 - options, 5-2
 - recommendations to handle heavy workloads, 5-16
 - single node or group, 2-5
 - stopping, 2-5
- Collection intervals, Glossary-1
 - changing
 - at window level, 5-14, 5-19
 - globally, 5-14
 - collection factor, 5-15
 - default values, 5-15
 - display factor, 5-15
 - event, 5-15
 - factor setting, 5-2
 - noevent, 5-15
- Collect menu, 2-5
- Command qualifiers, 2-1
- Communications buffer, 5-18
- Compute wait state, 3-27
- /CONFIGURE qualifier, 2-1
- Control wait state, 3-27
- Conventions, xi
- Conversion locks, 3-22
- Corrective action, 2-8
- CPU Modes Summary window, 3-3 to 3-4
- CPU queues
 - display of number of processes in, 2-3
- CPUs
 - capability, 3-4
 - classes, 5-11
 - CPU identifier (ID), 3-4
 - CPU Modes field, 3-17
 - CPU Process State Queues field, 3-17
 - default data collection, 5-2
 - filter categories, 5-7
 - filtering data, 5-6
 - improving
 - performance by suspending, 4-7
 - response, 5-12
 - load in gathering data, 2-5
 - modes, 3-4, 3-17
 - number active on a node, 3-17
 - peak usage, 3-4
 - percentage used, 3-4

- CPUs (cont'd)
 - process
 - identifier (PID), 3-4, 3-5
 - name in, 3-4
 - priority, 3-5
 - state queues, 3-17
 - time, 3-5
 - program counter, 3-24
 - setting process priorities, 4-4
 - single process mode rate, 3-26
 - state, 3-4, 3-5
 - time
 - limit (CPULM) for single process modes, 3-27
 - rate, 3-4, 3-5
 - use, 3-3, 3-4
 - display of, 2-3
 - wait state, 3-5
- CPU Summary window, 3-4 to 3-5
- Crash Node fix, 4-4
- Creating groups, 1-7
- Customizing
 - automatic investigation when events detected, 5-2
 - collection interval factor, 5-2
 - default settings, 5-1
 - effect on performance, 5-18
 - hiding node names on startup, 5-2
 - highlighting event data, 5-2
 - security files, 1-7
 - template customization files, 5-2

D

- Data
 - display
 - default, 2-4
 - event details, 2-8
 - link, 5-18
 - transfer security, 1-4
- Data Analyzer, 1-1, Glossary-1
 - access for Data Providers, 1-4
 - AMDSSCONSOLE_ACCESS.DAT file, 1-4
 - data exchange with Data Provider, 1-8
 - files used for, B-1
 - log files, B-4
 - security file, A-14
 - setting up after installing, A-14
 - starting, 2-1, A-15
 - system directory definition, A-14
 - typical setup, 1-2
 - user account privileges and quotas, A-14
- Data collection
 - See Collecting data
- Data Provider, 1-1, Glossary-1
 - access for Data Analyzers, 1-4
 - AMDSSDRIVER_ACCESS.DAT file, 1-4
 - data exchange with Data Analyzer, 1-8

Data Provider (cont'd)

- files, B-3
- restarting, 1-8
- restrictions, 1-2
- security file, A-13
- setting up after installation, A-13
- starting, A-14

Data windows, Glossary-1

- See also specific window names
- Cluster Transition/Overview Summary, 3-29
- CPU Modes Summary, 3-3
- CPU Summary, 3-4
- Disk Status Summary, 3-5
- hierarchy, 3-2
- Lock Contention Summary, 3-11
- Memory Summary, 3-14
- NISCA Summary, 3-35
- Node Summary, 3-15
- overview, 3-1
- Page/Swap File Summary, 3-18
- Process I/O Summary, 3-19
- Single Disk Summary, 3-9
- Single Lock Summary, 3-21
- Single Process Summary, 3-23
- System Communication Architecture (SCA) Summary, 3-33
- Volume Summary, 3-8

DECamds

- overview, 1-1
- processing model, 1-2
- security features, 1-4
- starting, 2-1, A-14

Defaults

- automatic data collection, 5-2
- collection intervals, 5-2, 5-15
- customizing, 5-1
- data display, 2-4
- event color, 5-2
- event highlighting, 5-2
- event investigation state, 5-2
- lock event collect state, 5-2
- options, 2-4
- setting data collection, 5-3

Deleting an event, 2-9

Device name field, 3-6, 3-9

Digital Availability Manager for Distributed Systems

- See DECamds

DIO (direct I/O)

- DIO rate field, 3-20
- limit (DIOLM), 3-27
- Limit Remaining field, 3-20
- use display, 2-3
- wait state, 3-27

Direct I/O usage

- See DIO

Disk

- error messages, 3-7, 3-9
- Disk space required for installation, A-3
- Disk Status Summary window, 3-5 to 3-7

Displaying

- default data, 2-4
- event data, 2-8
- options, 2-4

Display software installation requirements, A-2

- DSKERR error message, 3-7
- DSKINV error message, 3-7
- DSKMNV error message, 3-7
- DSKOFF error message, 3-7
- DSKQLN error message, 3-9
- DSKRWT error message, 3-7
- DSKUNA error message, 3-7
- DSKWRV error message, 3-7
- Duration field, 3-12, 3-22

E

ENQLM (enqueue limit) job quotas in use, 3-28

Error messages

- CPU, 3-5
- disk status, 3-7
- disk volume, 3-9
- lock contention, 3-14
- memory, 3-15
- node, 3-17
- page/swap file, 3-19
- process I/O, 3-20
- single lock, 3-22
- single process, 3-28

Errors field, 3-7

Escalation

- severity filter, 2-7
- time filter, 2-7

Event Log window, 2-5, Glossary-2

- deleting events from, 2-9
- display fields, 2-6
- filters, 2-7
- menus, 2-6
- using, 2-5

Events, Glossary-2

- See also Event Log window

- automatic collection, Glossary-1
- automatic investigation, 5-3
- bell filter, 2-7
- bell volume, 2-7
- changing
 - default highlighting, 5-2
 - severity filter, 5-6, 5-10
- corrective action, 2-8
- creating thresholds for different computer classes, 5-10
- customizing based on frequency of occurrence, 5-10
- deleting, 2-9

Events (cont'd)

- displaying more information, 2-8
 - escalation
 - severity filter, 2-7
 - time filter, 2-7
 - filtering, 2-7
 - highlight filter, 2-7
 - highlighting color, 5-2
 - log
 - file, B-4
 - window, Glossary-2
 - removing from the Event Log window, 2-5
 - sending messages to OPCOM, 2-9
 - severity, 2-7
 - severity values, 2-6
 - signal filter, 2-7
 - temporary freeze, 2-6, 2-9
 - timeout, 2-6
 - filter, 2-7
- Exiting Image and Deleting Process fix, 4-5
- Explicit wait state, 3-27

F

- Fault rate for pages, 3-15
- File Name field, 3-18
- File protection for security, 1-4
- Files, B-1 to B-6
- FILLM (file limit) job quota in use, 3-28
- Filtering data, 5-5
 - at window level, 5-18
 - changing a filter category, 5-7
- Filters
 - bell, 2-7
 - bell volume, 2-7
 - changing severity values for events, 5-6, 5-10
 - escalation severity, 2-7
 - escalation time, 2-7
 - Event Log, 2-7
 - highlight, 2-7
 - signal (display), 2-7
 - timeout, 2-7
- Fixes, 4-1, Glossary-2
 - adjust working set, 4-3
 - automatic, 4-7
 - changing
 - process priority, 4-4
 - working set size, 4-3
 - cluster hung, 4-2
 - crashing a node, 4-4
 - deleting a process, 4-5
 - examples, 4-7 to 4-9
 - exiting an image, 4-5
 - Fix menu, 2-8
 - intruder, 4-2, 4-3
 - list of available, 4-1
 - manual, 4-7
 - memory too low, 4-2

Fixes (cont'd)

- memory usage, 4-1
 - options, 2-8
 - performing, 4-2 to 4-7
 - process, 4-1 to 4-3
 - purging a working set, 4-6
 - quorum, 4-1
 - resuming a process, 4-6
 - runaway process, 4-3
 - summary, 4-2
 - suspending a process, 4-6
 - system, 4-1
 - understanding, 4-1
 - working set too high or too low, 4-3
- Flags field, 3-22
- Free field, 3-9

G

- Getting Started, 2-1
- Granted Locks, 3-22
- GR mode field, 3-22
- /GROUP qualifier, 2-1
- Groups, 1-7, 2-3, Glossary-2
 - collapsing information, 2-4
 - collecting data, 2-5
 - expanding information, 2-4
 - how to assign a node, 1-8

H

- Hanging cluster fix, 4-2
- Hardware
 - installation requirements, A-2
 - model field, 3-17
 - security triplet address, 1-5
- Hardware model
 - display of for node, 2-3
- Hello message broadcasts
 - See Broadcast intervals
- Help, 2-1
- HIBIOR error message, 3-17
- HICOMQ error message, 3-17
- Hide Nodes, 2-4
 - changing default behavior, 5-2
- HIDIOR error message, 3-17
- Highlighting
 - changing default behavior, 5-2
 - customizing color, 5-2
 - filter, 2-7
- HIHRDP error message, 3-17
- HIMWTQ error message, 3-17
- HINTER error message, 3-17
- HIPWIO error message, 3-17
- HIPWTQ error message, 3-17
- HISYSP error message, 3-17

HITTLP error message, 3-17
HMPSYN error message, 3-17

I

I/O

average number of operations pending for a volume, 3-9

BIO

limit (BIOLM), 3-27
limit remaining, 3-20
wait state, 3-27

byte limit remaining, 3-20

classes, 5-11

default data collection, 5-2

DIO

limit (DIOLM), 3-27
limit remaining, 3-20
wait state, 3-27

Fault rate for pages, 3-15

open files, 3-20

PIO, 3-20, 3-27

process

identifier (PID), 3-20
summary, 3-19

summary for node, 3-17

I/O field, 3-17

Images Activated field, 3-26

Installation requirements, A-2 to A-4

Installing DECams

Alpha, A-4 to A-6

kit location, A-1

post-installation tasks, A-13

preparation, A-1

requirements, A-2

VAX, A-6 to A-15

Interrupt priority level

See IPL

Intruder fix, 4-2

Investigating low memory cause, 4-7

IPL (interrupt priority level), 1-2

J

Job quotas in use, 3-28

JOB_CONTROL process, 4-7

K

Kit location, A-1

L

LAN

polling, 5-16

setting load, 5-17

LCKBLK error message, 3-22

LCKCNT error message, 3-14

LCKWAT error message, 3-22

LIB files, B-2

Licenses required for installation, A-3

LKID field, 3-22

LOASTQ error message, 3-28

LOBIOQ error message, 3-20, 3-28

LOBYTQ error message, 3-20, 3-28

Lock Contention Summary window, 3-11 to 3-14

default data collection, 5-2

detailed data, 3-21

recording information, B-4

Locks

automatic investigation, 5-3

Locks, types of, 3-22

LODIOQ error message, 3-20, 3-28

LOENQU error message, 3-28

LOFILQ error message, 3-20, 3-28

Log files, B-4

lock contention, B-6

Logging event messages, B-4

Logical names

AMDSS\$COMMBUFOVF, 5-18

AMDSS\$COMM_BUFFER_SIZE, 5-18, B-2

AMDSS\$COMM_READS, 5-18, B-2

AMDSS\$CONFIG, B-2, B-3

AMDSS\$DEVICE, B-3

AMDSS\$GROUP_NAME, B-3

AMDSS\$LOG, 2-6, B-2

AMDSS\$NUM_DL_READS, B-3

AMDSS\$RM_DEFAULT_INTERVAL, B-3

AMDSS\$RM_OPCOM_READ, B-4

AMDSS\$RM_OPCOM_WRITE, B-4

AMDSS\$RM_SECONDARY_INTERVAL, B-4

Data Analyzer node, B-1

Data Provider, B-3

requirements, B-1

sending messages to OPCOM, 1-9

/LOG_DIRECTORY qualifier, 2-1

LOMEMY error message, 3-17

Looping process fix, 4-2

LOPGFQ error message, 3-28

LOPGSP error message, 3-19

LOPRCQ error message, 3-28

LOSWSP error message, 3-19

LOTQEQ error message, 3-28

LOVLSP error message, 3-9

LOWEXT error message, 3-15, 3-28

LOWSQU error message, 3-15, 3-28

LRGSH error message, 3-14

M

Manual fix, 4-7
Master Node field, 3-12
Memory
 classes, 5-11
 default data collection, 5-2
 distribution on a node, 3-17
 example fix for low, 4-7
 fixes, 4-1
 fix for low, 4-2
 investigating low memory cause, 4-7
 Memory field, 3-17
 process identifier (PID), 3-15
 rate display, 2-3
 requirements, 5-16
 sorting data, 5-13
 total for a node, 3-17
 wait state, 3-27
Memory Summary window, 3-14 to 3-15
Messages, sending to OPCOM, 1-9
Mount field, 3-7
Multicast messages
 customizing interval, B-3
Mutexes held, 3-26

N

Name field, 3-15
Network address
 security triplet, 1-5
Network Interconnect System Communication
 Architecture
 See NISCA
NISCA Summary window, 3-35 to 3-40
Node
 hardware model of, 2-3
Node Name field, 3-18
Nodes
 assigning to a group, 1-8
 availability messages
 setting broadcast intervals, 1-10
 crash fix, 4-4
 default data collection, 5-2
 field, 3-22
 shutdown procedure, A-13
Nodes Summary window, 3-15 to 3-17
NOPGFL error message, 3-19
NOPROC error message, 3-17
NOSWFL error message, 3-19

O

Occurrences, 5-10
Online release notes, A-1
OPCOM
 filtered event messages sent to, 2-7
 logging issues, 1-4
 sending events to, 2-9
 sending messages, 1-9
Open files
 field, 3-20
 for process I/O, 3-20
 limit remaining, 3-20
 Limit Remaining (Files) field, 3-20
Operating system
 field, 3-17
 version displayed, 2-3
 version requirements for installation, A-2
Operations count rate, 3-9
Operator communication manager (OPCOM)
 See OPCOM
OpRate field, 3-9
Optimizing performance, 5-1
 by customizing data collection, 5-16
 with hardware, 5-19
Owner ID field, 3-24

P

Page faults, 3-27
 adjust working set, 4-3
 field, 3-17
 I/O Rate field, 3-15
 purging working sets, 4-6
 Rate field, 3-15
Page file
 default data collection, 5-2
Pagelets, Glossary-2
 number used, 3-18
 percentage number used, 3-18
 reserving for use, 3-18
 total available in page file, 3-18
Pages, Glossary-2
 number used, 3-18
 percentage number used, 3-18
 reserving for use, 3-18
 total available in page file, 3-18
Page/Swap File Summary window, 3-18 to 3-19
Parameter (system) settings required for
 installation, A-3
Parent Resource Name field, 3-12, 3-22
Partitioning groups, 1-7
Path field, 3-6, 3-9
PC (program counter) field, 3-24
Performance
 optimizing by customizing data collection, 5-16

PGFLQUO (page file quota) job quotas in use, 3-28

PID (process identifier), 3-5

- CPU, 3-4
- field, 3-15
- I/O, 3-20
- memory, 3-15
- PID field, 3-20, 3-24
- single process, 3-24

PIO (paging I/O), 3-27

- field, 3-20
- rate, 3-20

Polling

- LAN, 5-16

PRBIOR error message, 3-20, 3-28

PRBIOW error message, 3-28

PRCCOM error message, 3-5, 3-28

PRCCUR error message, 3-28

PRCCVR error message, 3-5

PRCLM (Process limit)

- job quotas in use, 3-28

PRCMUT error message, 3-28

PRCMWT error message, 3-5

PRCPUL error message, 3-28

PRCPWT error message, 3-5, 3-28

PRCQUO error message, 3-28

PRCRWA error message, 3-28

PRCRWC error message, 3-28

PRCRWM error message, 3-28

PRCRWP error message, 3-28

PRCRWS error message, 3-28

PRCUNK error message, 3-28

PRDIOR error message, 3-20, 3-28

PRDIOW error message, 3-28

Preparing for installation, A-1

Priority

- field, 3-24
- process, 3-24
- process fix, 4-1

Private LAN transport security, 1-4

Privileges

- installation requirements, A-2
- to run Data Analyzer node, A-14
- to run Data Provider node, A-14
- to start DECamds, A-13

PRLCKW error message, 3-28

Problems, reporting, A-15

Process

- See Single Process Summary window
- account quotas required for installation, A-3
- fixes, 4-1
- looping fix, 4-2
- name in CPU, 3-4
- quotas
 - AMDSSCOMM process, 5-2
 - recommended, 5-17
- security privileges, 1-4
- states, 3-25

Process

- states (cont'd)
 - queues on CPUs, 3-17

Processes

- display of number of in CPU queues, 2-3

Process I/O Summary window, 3-19 to 3-20

Process Name field, 3-20, 3-22, 3-24

Program counter, 3-24

PRPGFL error message, 3-15, 3-28

PRPRIOR error message, 3-15, 3-20, 3-28

PSL (processor status longword), 3-24

Purge Working Set fix, 4-6

Q

Queue field, 3-9

Quorum fix, 4-1

Quotas

- in use jobs, 3-28
- limit fix, 4-3
- process account quota requirements, A-3
- process mode, 3-27
- recommended for processes, 5-17
- to run Data Analyzer node, A-14
- wait state, 3-27

R

Read-only access, 1-9

Recording

- event messages, B-4
- lock contention information, B-4

Release notes, 5-2, A-1

Reporting problems, A-15

RESDNS error message, 3-14

Reservable field, 3-18

Resource Name field, 3-22

Response time

- external factors, 5-16
- optimizing by customizing data collection, 5-16
- system hardware, 5-19

RESPRS error message, 3-14

Restarting the Data Provider, 1-8

Restrictions on the Data Provider, 1-2

Resume Process fix, 4-6

RMCP.EXE file, B-3

RMDRIVER.EXE file, B-3

RQ Mode field, 3-22

Runaway process fix, 4-3

Rwait field, 3-7

S

SCA

- See System Communication Architecture

Security, 1-4

- customizing files, 1-7
- Data Analyzer file, A-14

Security (cont'd)

- Data Provider file, A-13
- data transfer, 1-4
- file protection, 1-4
- logging issues with OPCOM, 1-4
- private LAN transport, 1-4
- process privileges, 1-4
- read-only access, 1-9
- steps after installing
 - Data Analyzer, A-14
 - Data Provider, A-13
- Security triplet, Glossary-2
 - access verification code, 1-5
 - format, 1-5
 - hardware address, 1-5
 - how they work, 1-6
 - network address, 1-5
 - password, 1-5
 - verification, 1-7
 - wildcard address, 1-6
- Setting broadcast intervals, 1-10
- Severity
 - events, 2-7
- Show Nodes, 2-4
 - changing default behavior, 5-2
- Shutdown procedure, node, A-13
- Signal filter, 2-7
- Single Disk Summary window, 3-9 to 3-11
- Single Lock Summary window
 - error messages, 3-22
 - Granted, Conversion, and Waiting Queue Lock, 3-22
 - Granted Lock, 3-22
 - Granted Lock fields, 3-22
- Single node
 - collecting data, 2-5
- Single Process Summary window
 - error messages, 3-28
 - execution rates, 3-26
 - quotas, 3-27
 - rate, 3-26 to 3-27
- Sorting data
 - for memory data, 5-13
- Starting DECamds, 2-1
- Starting the Data Analyzer, 2-1, A-15
- Starting the Data Provider, A-14
- State field, 3-24
- Status field, 3-7, 3-12
- Stopping data collection, 2-5
- Suspended process fix, 4-2
- Suspend Process and Resume Process fix, 4-6
- Swap file
 - default data collection, 5-2
- SWAPPER process
 - fixes ignored, 4-2
- Symmetric Multiprocessing (SMP) nodes, 2-3

- SYSSHELP.HLB file, B-1, B-3
- SYSSRMDRIVER.EXE file, B-3
- SYSSSTARTUP.COM file, B-3
- System
 - fix, 4-1
 - load recommendations for hardware, 5-19
 - parameter settings required for installation, A-3
 - processes, 4-7
 - requirements, 1-3 to 1-10, A-2
- System Communication Architecture (SCA)
 - Summary window, 3-33 to 3-35
- System Overview window, 2-2, Glossary-2
 - hiding node name on startup with customization file, 5-2
 - how to define groups, 1-7
 - known problems, 5-16
 - menus, 2-3

T

- Thresholds, customizing for events or different computer classes, 5-10
- Timeout filter, 2-7
- Total field, 3-18
- Total Memory field, 3-17
- TQELM (Timer queue entry limit)
 - job quotas in use, 3-28
- Trans (transaction) field, 3-7
- Transactions, number of disk, 3-7
- Triplet
 - See Security triplet
- Type field, 3-22

U

- UICs (user identification codes)
 - single process summary, 3-24
 - UIC field, 3-24
- Uptime field, 3-17
- Used field, 3-9, 3-18
- % Used field, 3-9, 3-18
- User accounts
 - Data Analyzer node privileges and quotas, A-14
- Username field, 3-24

V

- VAX installation, A-6 to A-15
 - See also Installing DECamds
- Verifying security triplets, 1-7
- Version
 - display of operating system, 2-3
- Viewing groups, 2-4

- View menu, 2-4
- VMSclusters
 - including in groups, 1-7
- VMSINSTAL (VAX only) installation requirements, A-4
- Volume
 - default data collection, 5-2
 - I/O operations, 3-9
 - number of blocks used, 3-9
 - number of free blocks used, 3-9
 - operations count rate, 3-9
 - percentage number of blocks used, 3-9
- Volume Name field, 3-6, 3-9
- Volume Summary window, 3-8 to 3-9

W

- Waiting Queue Locks, 3-22
- Wait states
 - control, 3-27
 - CPU, 3-5
 - disk status, 3-7
 - explicit, 3-27
 - quota, 3-27
 - RWAIT, 3-7
- Wildcard address
 - security triplet, 1-6
- Windows
 - See Data Windows
- Working set
 - count, 3-15
 - default, 3-26
 - extent, 3-15, 3-26
 - global pages, 3-25
 - private pages, 3-26
 - purging, 4-6
 - quota, 3-26
 - size, 3-15, 3-26
 - size fix, 4-3
 - too high or too low, 4-3
 - total pages, 3-26
- WSdef field, 3-26
- WSextent field, 3-26
- WSquo field, 3-26

